


1. SPECIFICATION

AC-903Q-P12




ITEM		UNITS	SPECIFICATIONS	CONDITIONS
01	Rated Voltage	V	3	
02	Operating Voltage	V	2 ~ 5	
03	Consumption Current	mA (Max)	Mean : 80	Applying rated voltage, rated frequency Square wave, 1/2 duty subject to standard state.
			Peak : 240	
04	Direct Current Resistance	Ω	15±3	
05	Sound pressure level (Distance at 10cm)	dBA (Min)	82	Applying rated voltage, rated frequency Square wave, 1/2 duty subject to standard state.
06	Rated Frequency	Hz	2731	

REV NO.

REVISION NOTE

APPROVAL

DATE

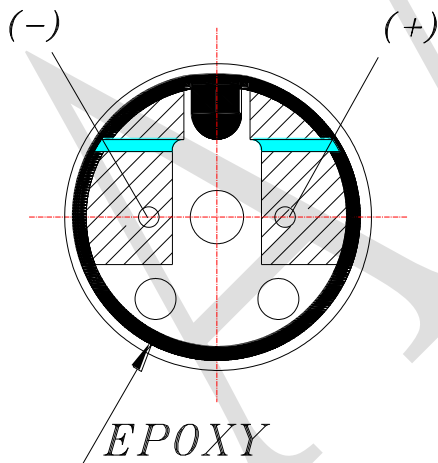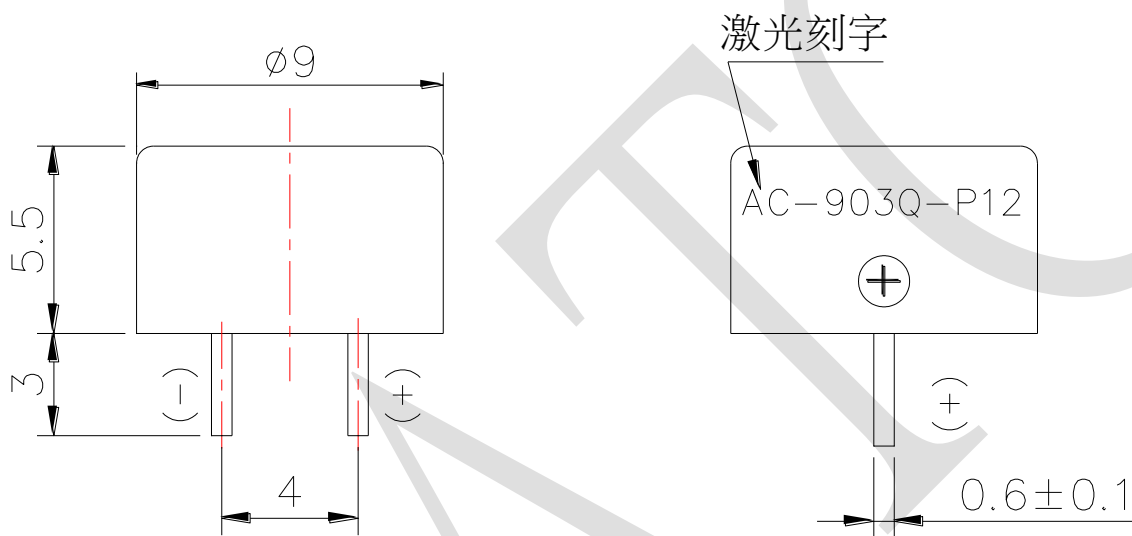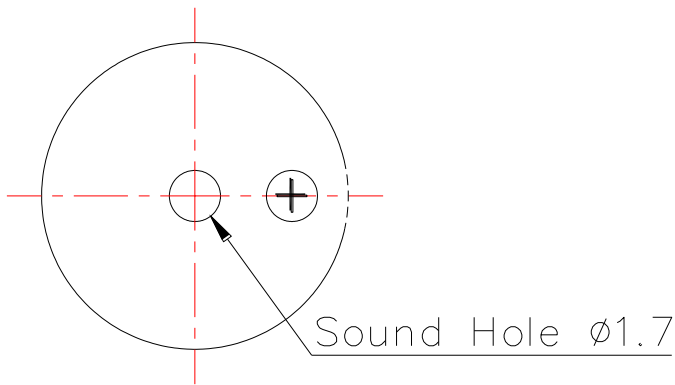

防火等級: UL94V0

RoHS

TITLE: ELECTRO MAGNETIC BUZZER		DRAWN: Moose 2015/08/14	SCALE: 4:1	SHEET: 1 of 1
PART NO. AC-903Q-P12		DESIGNED: R&D OF AAT	UNITS: mm	TOLERANCE ± 0.5 UNLESS OTHERWISE SPECIFIED: ONE PLACE DECIMAL \pm *** TWO PLACE DECIMAL \pm *** THREE PLACE DECIMAL \pm ***
DWG NO. UGCM0903EP3.0D-82	1 REV	CHECKED:		
		APPROVAL:		
		MATERIAL: PBT		



ADVANCED ACOUSTIC TECHNOLOGY CORPORATION