

1575 MHz GPS Ceramic Chip Antenna Evaluation Board


ACAG0301-1575-EVB

90.0 x 50.0 mm

Description

ACAG0301-1575-EVB Evaluation boards are designed to provide a means to facilitate engineering evaluation of the chip antenna : ACAG0301-1575-T working at 1575 MHz. With a typical bandwidth of 40 MHz, the chip is suitable for GPS applications.

To evaluate the performance of antenna, calibrate the Vector Network analyzer (VNA) for the testing frequency band and connect the evaluation board to the calibrated port using the given SMA connector on the board.

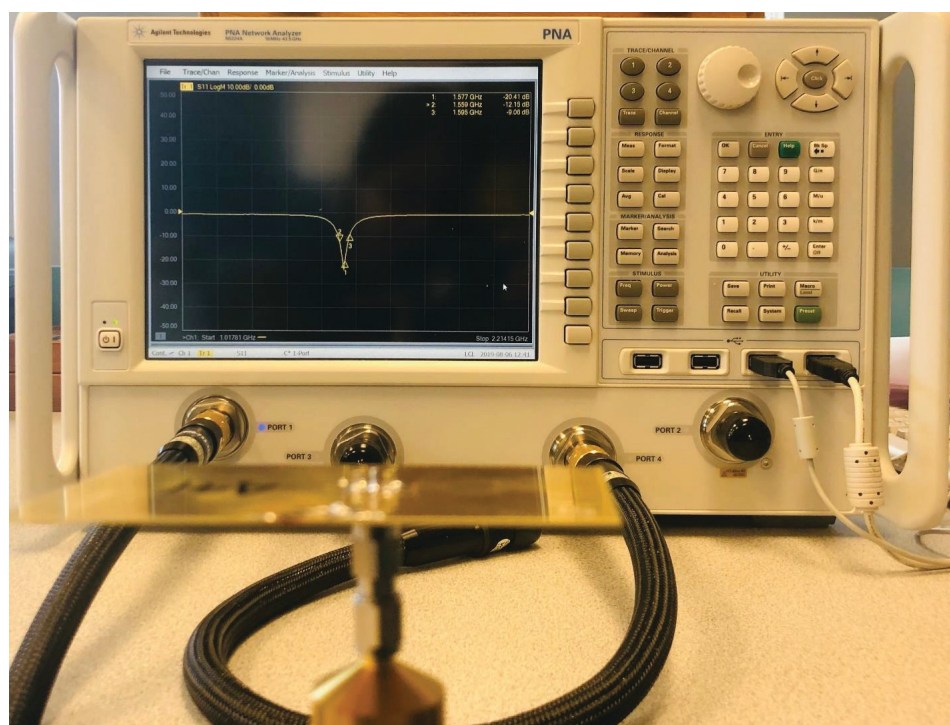


1575 MHz GPS Ceramic Chip Antenna Evaluation Board

ACAG0301-1575-EVB

90.0 x 50.0 mm

Evaluation Board with Chip Antenna Layout

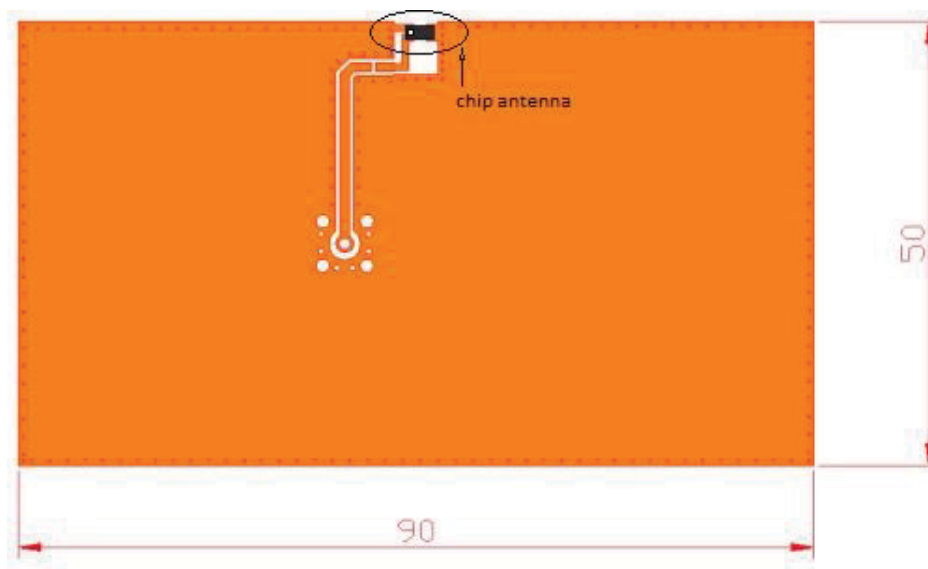

Evaluation Board dimension : 90 x 50 mm


Unit: mm

1575 MHz GPS Ceramic Chip Antenna Evaluation Board

ACAG0301-1575-EVB

90.0 x 50.0 mm


Chip Antenna Layout

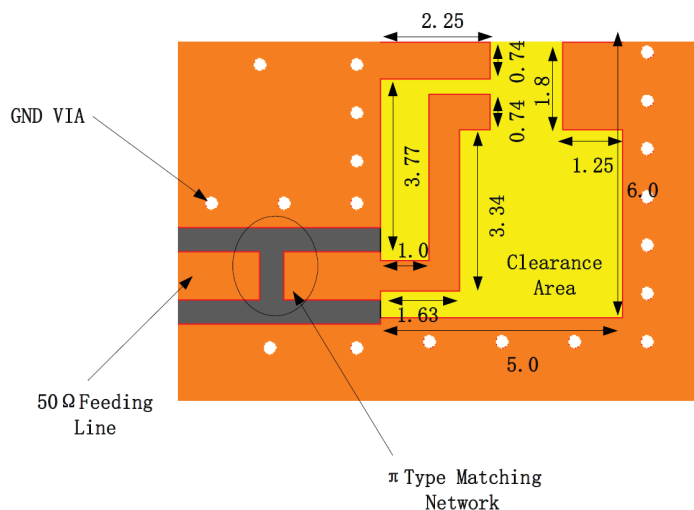

Unit: mm

Matching Network on EVB:

Antenna matching network is designed using a combination of inductors (2.4 nH and 5.6 nH) near the input terminal as shown in the above figure.



Note :

1. Yellow highlighted space represents the ground clearance area around the chip antenna.
2. Desired clearance area : 6.0 x 5.0 mm
3. Width of the 50 Ω line is designed in accordance with the PCB thickness and material considered.
4. Matching network (Pi - network) provided is in accordance with the EVB layout and matching will differ in the actual customer PCB depending on the layout.