

## BIDIRECTIONAL THYRISTOR OVERVOLTAGE PROTECTORS



## ACTP250J1BJ AC Transient Protector

Designed to withstand a 2.5 kV (1.2/50 voltage, 8/20 current) combination wave surge per IEC 61000-4-5 when used in series with an appropriate overvoltage clamp device.\*

- Ion-Implanted Breakdown Region
- Precise and Stable Voltage
- Low Voltage Overshoot Under Surge Conditions


\* Refer to Application section, page 5.

Device	V <sub>DRM</sub> (V)	V <sub>(BO)</sub> (V)
ACTP250J1BJ	190	250


## Agency Recognition

Description	
UL	File Number: <a href="#">E215609</a>

## SMB Package (Top View)

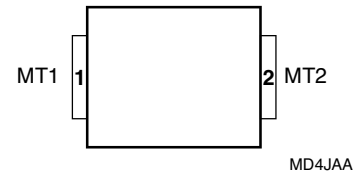

## Device Symbol



## ACTP250J1BJ Overview

The Bourns® Model ACTP250J1BJ is a bidirectional thyristor designed to be used in series with an overvoltage clamp device, such as an MOV, to protect a power supply from damage due to an overvoltage condition on its ac input lines. This device raises the turn-on voltage threshold of the series combination against low frequency overvoltage conditions while having minimal impact on the voltage clamp level when subjected to a lightning surge. Using this series combination will prevent the MOV from conducting when line frequency voltage swells (up to the sum of the breakdown voltages of the two components) occur on the ac input lines of the power supply. This allows a design to avoid the use of a higher voltage MOV, which, if used, would significantly reduce the level of lightning protection. See the Application section for additional information.

## How to Order

Device	Package	Carrier	Order as
ACTP250J1BJ	BJ (SMB/DO-214AA J-Bend)	R (Embossed Tape Reeled)	ACTP250J1BJR-S

# BOURNS®

## Asia-Pacific:

Tel: +886-2 2562-4117 • Email: [asiacus@bourns.com](mailto:asiacus@bourns.com)

## Europe:

Tel: +36 88 885 877 • Email: [eurocus@bourns.com](mailto:eurocus@bourns.com)

## The Americas:

Tel: +1-951 781-5500 • Email: [americus@bourns.com](mailto:americus@bourns.com)

[www.bourns.com](http://www.bourns.com)



**WARNING Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)**

\*RoHS Directive 2015/863, Mar 31, 2015 and Annex.

\*\*When used as intended; see Application section on page 5.

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at [www.bourns.com/docs/legal/disclaimer.pdf](http://www.bourns.com/docs/legal/disclaimer.pdf).

# ACTP250J1BJ AC Transient Protector



## Absolute Maximum Ratings, $T_A = 25\text{ }^\circ\text{C}$ (Unless Otherwise Noted)

Rating	Symbol	Value	Unit
Repetitive peak off-state voltage	$V_{DRM}$	$\pm 190$	V
Non-repetitive peak on-state pulse current (see Notes 1,2 and 3) 8/20 (IEC 61000-4-5, combination wave generator, 1.2/50 voltage waveshape)	$I_{PPSM}$	1000	A
Initial rate of rise of on-state current, Linear current ramp, Maximum ramp value $< 50\text{ A}$	$di_T/dt$	800	A/ $\mu\text{s}$
Junction temperature	$T_J$	-40 to +150	$^\circ\text{C}$
Storage temperature range	$T_{stg}$	-65 to +150	$^\circ\text{C}$

### NOTES:

- Initially, the device must be in thermal equilibrium with  $T_J = 25\text{ }^\circ\text{C}$ .
- These non-repetitive rated currents are peak values of either polarity. The surge may be repeated after the device returns to its initial conditions.
- When used as intended; see Application section on page 5.

## Electrical Characteristics, $T_A = 25\text{ }^\circ\text{C}$ (Unless Otherwise Noted)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$I_{DRM}$ Repetitive peak off-state current	$V_D = \pm V_{DRM}$ $T_A = 25\text{ }^\circ\text{C}$ $T_A = 85\text{ }^\circ\text{C}$			$\pm 5$ $\pm 10$	$\mu\text{A}$
$V_{(BO)}$ AC breakover voltage	$dv/dt = \pm 250\text{ V/ms}$ , $R_{SOURCE} = 300\text{ ohms}$			$\pm 250$	V
$V_{(BO)}$ Ramp breakover voltage	$dv/dt \leq \pm 1000\text{ V}/\mu\text{s}$ , Linear voltage ramp, Maximum ramp value = $\pm 500\text{ V}$ $di/dt = \pm 20\text{ A}/\mu\text{s}$ , Linear current ramp, Maximum ramp value = $\pm 10\text{ A}$			$\pm 263$	V
$I_{(BO)}$ Breakover current	$dv/dt = \pm 250\text{ V/ms}$ , $R_{SOURCE} = 300\text{ ohms}$			$\pm 600$	mA
$I_H$ Holding current	$I_T = \pm 5\text{ A}$ , $di/dt = \pm 30\text{ mA/ms}$	$\pm 20$			mA
$I_D$ Off-state current	$V_D = \pm 50\text{ V}$ $T_A = 85\text{ }^\circ\text{C}$			$\pm 10$	$\mu\text{A}$
$C_{off}$ Off-state capacitance	$f = 1\text{ MHz}$ , $V_d = 1\text{ Vrms}$ , $V_D = 0$		105	125	pF

## Thermal Characteristics

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$R_{\theta JA}$ Junction to free air thermal resistance	EIA/JESD51-2 PCB, $I_T = I_{TSM}(1000)$ , $T_A = 25\text{ }^\circ\text{C}$ , (see Note 4)			90	$^\circ\text{C/W}$


NOTE 4: EIA/JESD51-2 environment and PCB has standard footprint dimensions connected with 5 A rated printed wiring track widths.

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at [www.bourns.com/docs/legal/disclaimer.pdf](http://www.bourns.com/docs/legal/disclaimer.pdf).

## Parameter Measurement Information

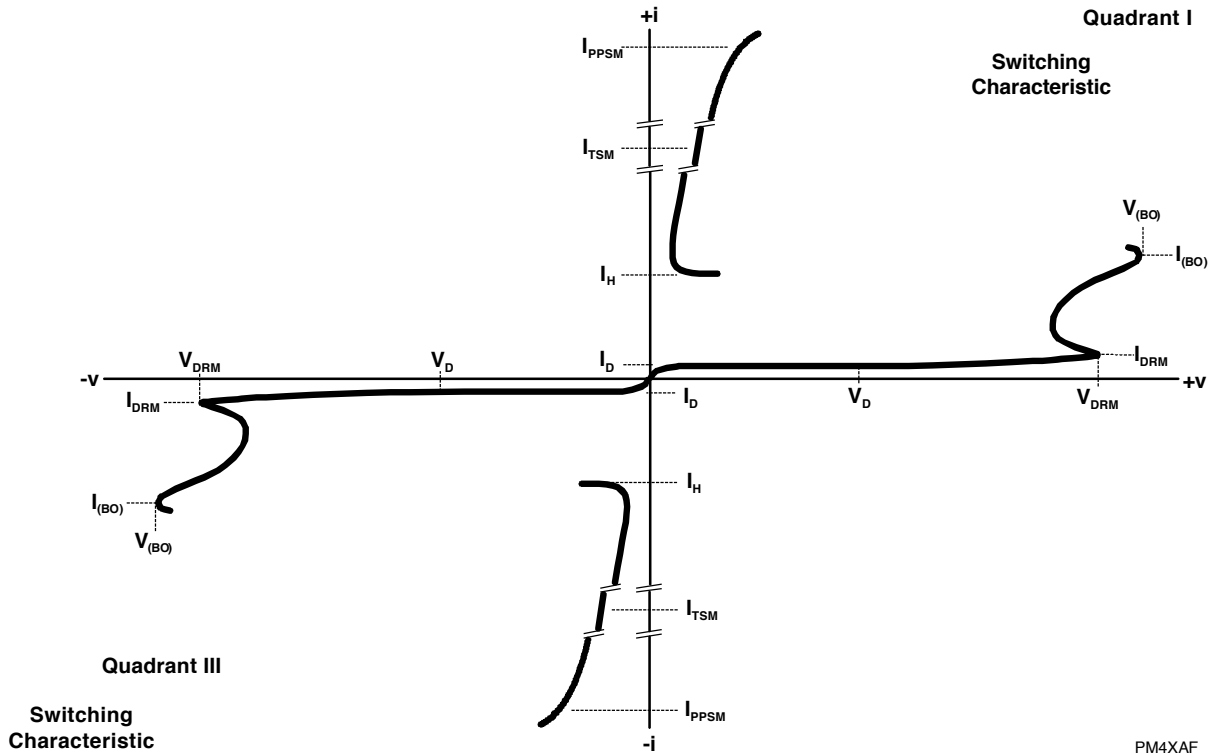

PM4XAF

**Figure 1. Voltage-Current Characteristic for Terminals 1-2  
All Measurements are Referenced to Terminal 2**


Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.


The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at [www.bourns.com/docs/legal/disclaimer.pdf](http://www.bourns.com/docs/legal/disclaimer.pdf).

## Typical Characteristics

**OFF-STATE CURRENT  
vs  
JUNCTION TEMPERATURE**

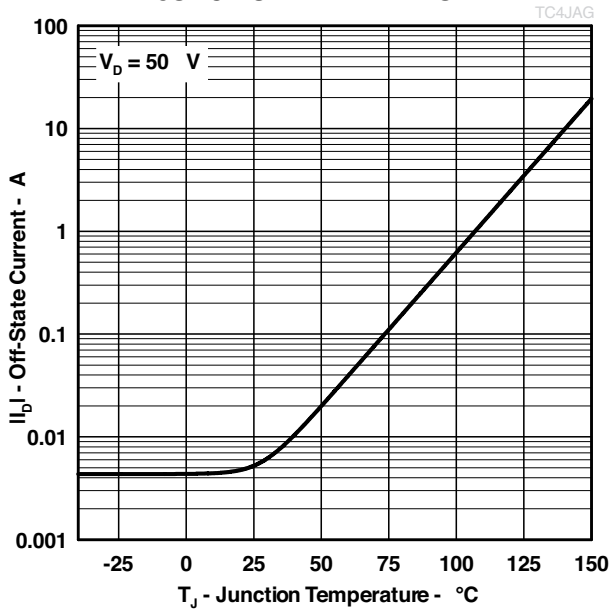


**NORMALIZED BREAKOVER VOLTAGE  
vs  
JUNCTION TEMPERATURE**

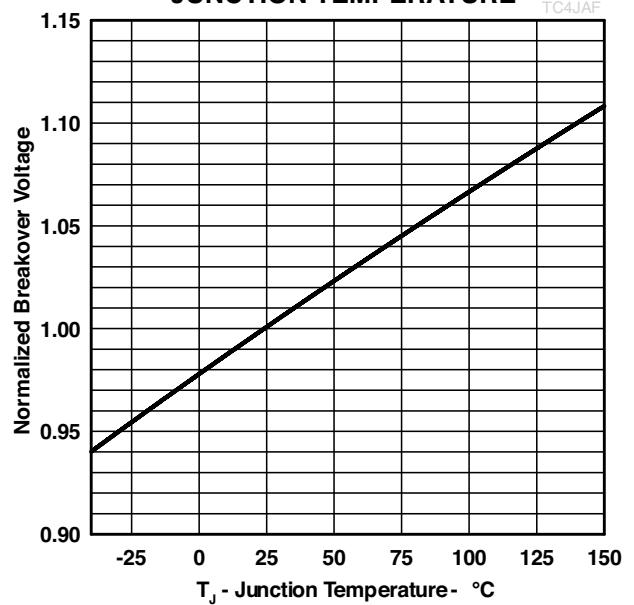


## Rating and Thermal Information

**NON-REPETITIVE PEAK ON-STATE CURRENT  
vs  
CURRENT DURATION**

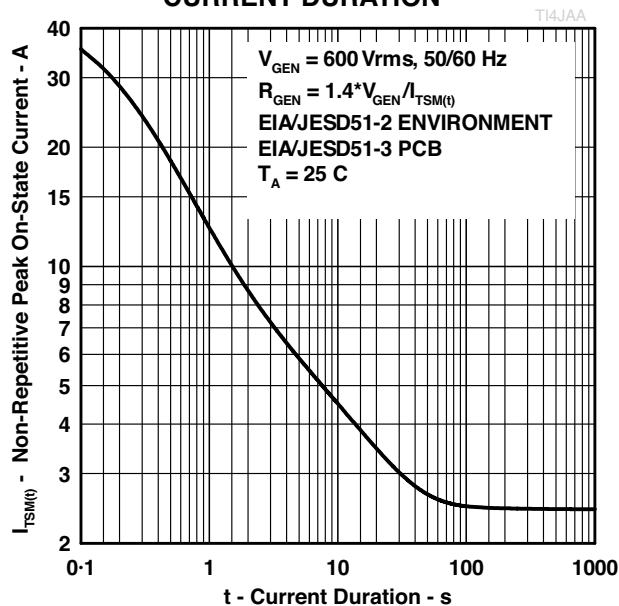

**$V_{DRM}$  DERATING FACTOR  
vs  
MINIMUM AMBIENT TEMPERATURE**

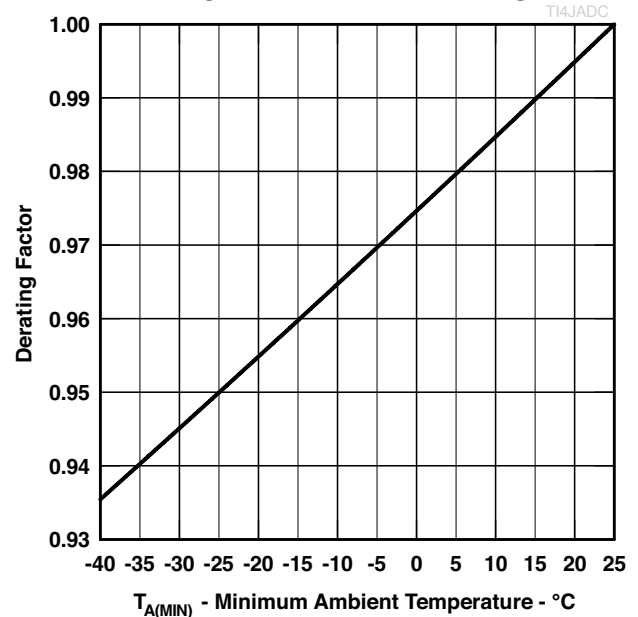

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at [www.bourns.com/docs/legal/disclaimer.pdf](http://www.bourns.com/docs/legal/disclaimer.pdf).

## APPLICATION INFORMATION

### Enhancing the Performance of an MOV

In many applications, an offline Switch Mode Power Supply (SMPS) is subjected to possible damage from indirect lightning strikes, switching transients, line voltage swells and other overvoltage conditions. Metal Oxide Varistors (MOVs) are often used to provide protection against lightning and other short duration transients. However, an MOV can easily be overstressed by a power line voltage swell due to the low frequency characteristic of this overvoltage condition. To address this problem, the Model ACTP250J1BJ bidirectional transient protector can be placed in series with the MOV so that it does not conduct during AC line voltage swells up to a specific voltage level while allowing the series combination to clamp at voltage levels just above the MOV clamp voltage during a lightning transient.

For example, assume an offline SMPS that is designed to operate at a maximum line voltage of 260 Vrms and a 275 Vrms MOV is being used to provide protection against a lightning surge with a peak voltage of 2.5 kV per IEC 61000-4-5 (1.2/50  $\mu$ s voltage, 8/20  $\mu$ s current combination wave). To prevent the MOV from being damaged by a line voltage swell as high as 400 Vrms (566 Vpeak), a Model ACTP250J1BJ protector can be used in series with the MOV (as shown in Figure 1 below). At 25 °C, this combination has a minimum breakdown voltage of 577 V (387 + 190 = 577), where 387 V is  $V_{BD}$  of the 275 V<sub>RMS</sub> MOV, and 190 V is the  $V_{DRM}$  of the Model ACTP250J1BJ, assuring that it will not operate at a line voltage that is < 400 Vrms.

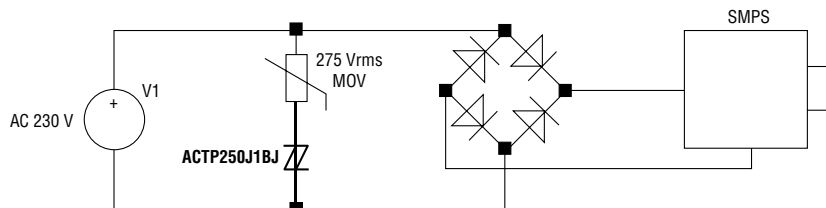


Figure 1. MOV/ACTP250J1BJ AC Line Protection

Adding the Model ACTP250J1BJ device in series with the MOV generates only a small increase in the clamp level. Figure 2 below shows the clamp voltage level of the MOV alone and the MOV/ACTP series combination for a 2.5 kV 1.2/50, 8/20  $\mu$ s combination wave surge. Note that the Model ACTP250J1BJ device only adds a few volts to the MOV clamp voltage.

The waveforms in Figure 3 show that the series combination does not clamp the voltage waveform or conduct current when subjected to a 400 Vrms line voltage.

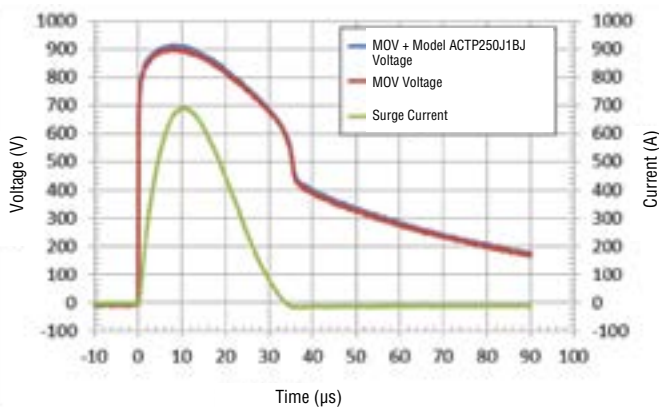


Figure 2. Protection Circuit Clamp Voltages for a 2.5 kV Surge

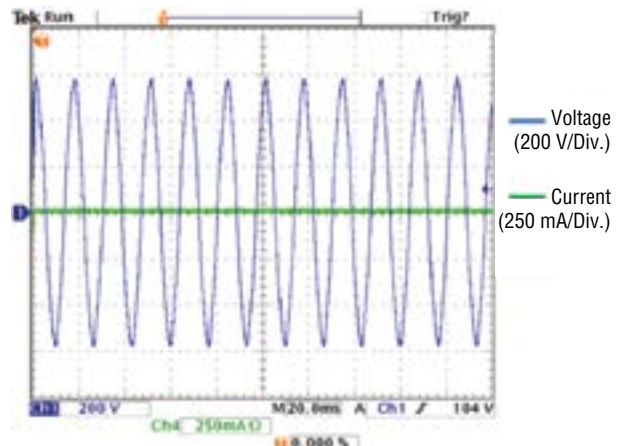


Figure 3. Performance of the Series Protection Circuit when Subjected to a 400 Vrms Line Voltage

In conclusion, adding the Model ACTP250J1BJ in series with the MOV reduces the MOV's susceptibility to damage from a line voltage swell while having a minimal impact on the lightning protection performance of the design.


Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at [www.bourns.com/docs/legal/disclaimer.pdf](http://www.bourns.com/docs/legal/disclaimer.pdf).

## MECHANICAL DATA

### Recommended Printed Wiring Land Pattern Dimensions

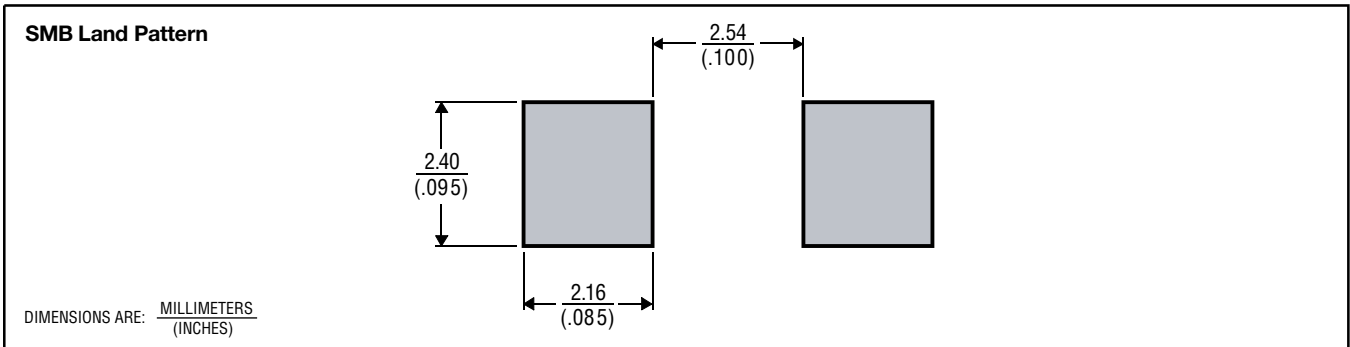

MDXX BID

### Device Symbolization Code

Devices will be coded as below. As the device parameters are symmetrical, terminal 1 is not identified.

Device	Symbolization Code
ACTP250J1BJ	250J1

### Carrier Information

For production quantities, the carrier will be embossed tape reel pack. Evaluation quantities may be shipped in bulk pack or embossed tape.

Package	Carrier	Standard Quantity
SMB	Embossed Tape Reel Pack	3000

07/19

"TISP" is a trademark of Bourns, Ltd., a Bourns Company, and is Registered in the U.S. Patent and Trademark Office.  
 "Bourns" is a registered trademark of Bourns, Inc. in the U.S. and other countries.

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at [www.bourns.com/docs/legal/disclaimer.pdf](http://www.bourns.com/docs/legal/disclaimer.pdf).