


ACW4 IO-LINK

IO-LINK ABSOLUTE SINGLE-TURN MODULAR SENSOR

Introduction

The ACW4  IO-Link version provides a compact versatile single-turn absolute position indication. The two-part construction keeps the profile low, delivering a high degree of flexibility for tight installations. By using the IO-Link protocol, integration and set-up of sensors is greatly simplified, supporting the move to factory 4.0 and IIOT initiatives. The ACW4 IO-Link is sealed to IP65 making it suitable for even the harshest industrial environments.



Features

- With its two-part design, the ACW4 IO-Link absolute single-turn position sensor offers maximum flexibility during installation
- IO-Link with COM3 transmission rate
- Easy commissioning and configuration with IO-Link
- Simple device replacement with Data Storage capability
- Universal power supply through IO-Link Master
- Robust and excellent resistance to shock and vibration
- Robust magnetic technology
- Standard IP65 protection (IP69K option)
- Extended operating temperature range from -40°C to 85°C
- Resolution : programmable 12 bits per turn
- Standard M12 connector

Applications

- Factory Automation
- Process Automation



SPECIFICATIONS

Mechanical

Terminations	PUR cable with M12 5 pin connector
Housing	Technomelt PA638 black
Weight	0,150 kg

Electrical

Electrical Angle	360°
Output Function	IO-Link V1.1, COM3 (230,4 kBaud)
Minimal Cycle Time	1ms
Resolution	single-turn: 12 bits
Accuracy	+/-0.3% on 360°
Repeatability	+/-0.1% on 360°
Supply Voltage	18 to 30 Vdc
Current Requirements	<40mA
Protection	Overvoltage Protection: Yes Reverse Polarity Protection: Yes Short Circuit Protection: Yes

EMC	IEC 61000-4-2 Electrostatic discharge (ESD) 4 kV, 8 kV
	IEC 61000-4-3 Electromagnetic fields 10 V/m (80MHz - 1GHz), 3V/m (1.4GHz - 2GHz), 1V/m (2GHz - 2.7GHz)
	IEC 61000-4-4 Electrical fast transients (burst) 1 kV
	IEC 61000-4-6 Conducted disturbances, induced by RF-fields 10 VEMF.


Environmental

Protection Class (Sealing)	IP65	
Temperature Range	Operating	-40°C to 85°C
	Storage	-40°C to 85°C
Shock	≤ 2000 m.s ⁻² (6ms half-sine)	
Vibration	≤ 200 m.s ⁻² (55 ... 2000 Hz)	



DIMENSIONS

All Dimensions are in millimeters.
 Shaft system with magnet to be ordered separately (see Accessories).

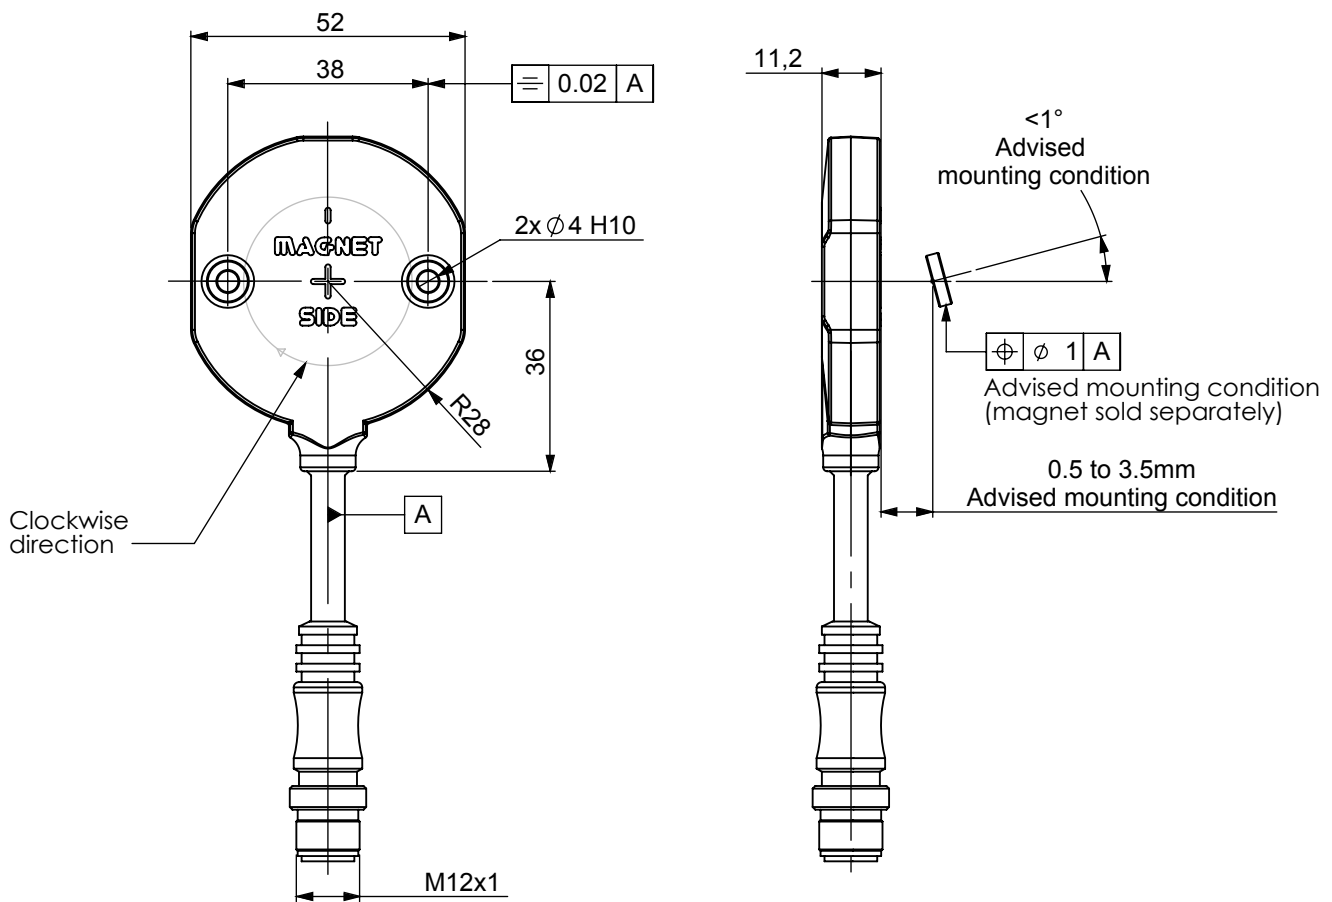



IO-LINK FEATURES

Process data

- Position: single turn 12 bits maximum
- Magnetic field issue : flag triggered if problem with magnet detection

Programmable Parameters

- Resolution per turn: 1 to 12 bits
- Direction: clockwise or counter-clockwise, changes counting direction.
- Set zero point : reset position to zero
- Preset value : The position process data is set to the preset parameters. The preset parameter shall be a valid position value according to the resolution chosen.


Diagnostics

- Operating Hours : number of hours since factory reset

CONNECTOR PIN OUT

IO-link device class B (Male M12 5 pin)

Pin	Color	Signal
1	Brown	L+
2	White	N.C
3	Blue	L-
4	Black	IO-Link
5	Grey	N.C



NOTES

Stray magnetic fields can interfere with accuracy and repeatability of the signal.

ORDERING OPTIONS

Example : ACW4_00//Z10B//12//BD R003

(Contact the factory for special versions, ex : dimensions, connections...)


Family	ACW4	-	00	//	Z		10		B	//	12	//	BD		R003
ACW4: Absolute Single-Turn Sensor															
Shaft Ø															
00: Modular															
Supply															
Z: 18 to 30Vdc															
Output Stage															
10: IO-Link															
Code															
B: Binary															
Resolution															
12: 12 bits single turn position															
Connection															
BD: PUR Cable + M12 5 pin connector															
Connection Orientation															
R003: Radial Cable 30cm															

ACCESSORIES

Female magnet support + Magnet 8810/013

Ordering p/n : M9105/Kxx

XXX: Where XX is the shaft mounting diameter in mm. Standards are 06, 08, 10, 11, and 14 mm. i.e M9105/K10 mounts to a 10 mm shaft.

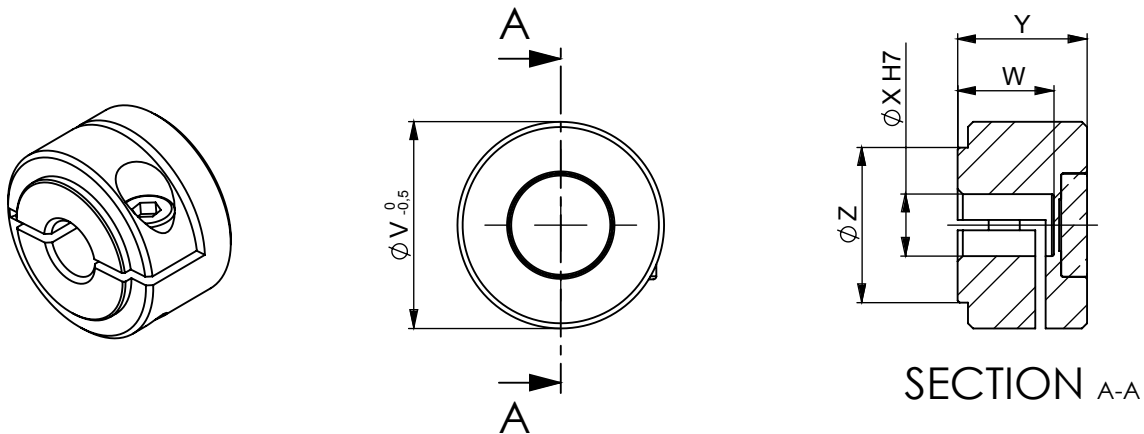

	M9105/K06	M9105/K08	M9105/K10	M9105/K11	M9105/K14
X	06 H7	08 H7	10 H7	11 H7	14 H7
V	20	20	26	26	29
W	9,3	9,3	10	10	10
Y	12,5	12,5	14	14	14
Z	15	15	15	15	18