

# Surface Mount Directional Coupler

## ADC-17-122-75+

75Ω    17dB    5 to 1250 MHz

### The Big Deal

- Covers DOCSIS® 3.1 Bandwidth Requirements
- Low mainline loss, 0.8 dB
- Excellent coupling flatness, ±0.4 dB up to 1000 MHz
- Good VSWR: 1.15:1



CASE STYLE: CD542

### Product Overview

Mini-Circuits' ADC-17-122-75+ is a 75Ω surface-mount directional coupler providing 17 dB coupling from 5 to 1250 MHz, supporting bandwidth requirements for DOCSIS 3.1 systems and equipment. This model, provides excellent coupling flatness, low mainline loss, good VSWR and RF input power handling up to 1W. The unit comes housed in a miniature 6-lead plastic package (0.27 x 0.31 x 0.11"), saving space in dense PCB layouts.

### Key Features

Feature	Advantages
Wideband, 5 to 1250 MHz	The ADC-17-122-75+ supports a variety of 75Ω applications, including DOCSIS 3.1 compliant systems.
Good coupling flatness, ±0.4 dB up to 1000 MHz	Provides consistent coupling performance across frequency.
High power handling, 1W	Usable in systems with a wide range of high-power requirements.
Low mainline loss, 0.8 dB	Provides excellent through-path signal power transmission.
Small size, 0.27 x 0.31 x 0.11"	Provides high power capability while saving space in systems with tight layouts.

# Surface Mount Directional Coupler

75Ω 17dB 5 to 1250 MHz

## ADC-17-122-75+



Generic photo used for illustration purposes only  
CASE STYLE: CD542

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost	
Reel Size	Devices/Reel
7"	20, 50, 100, 200
13"	500, 1000

### Features

- wideband, 5-1250 MHz
- low mainline loss, 0.8 dB typ.
- good VSWR, 1.15:1 typ.
- excellent coupling flatness,  $\pm 0.4$  dB typ. up to 1000 MHz
- aqueous washable
- protected by U.S. Patents 6,133,525 & 6,140,887

### Applications

- cable tv
- cellular
- DOCSIS 3.1 system
- VHF/UHF

### Electrical Specifications at 25°C

Parameter	Condition (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		5		1250	MHz
Mainline Loss <sup>1</sup>	5 - 1000	—	0.8	1.2	dB
	1000 - 1250	—	1.0	1.4	
Coupling	5 - 1250	—	17 $\pm$ 0.5	—	dB
Coupling Flatness ( $\pm$ )	5 - 1000	—	0.4	0.9	dB
	5 - 1250	—	0.6	1.0	
Isolation	5 - 50	30	48	—	dB
	50 - 870	22	30	—	
	870 - 1250	20	25	—	
Return Loss (Input)	5 - 1250	18	23	—	dB
Return Loss (Output)	5 - 1250	19	25	—	dB
Return Loss (Coupling)	5 - 1250	18	22	—	dB
Input Power	5 - 1250	—	—	1.0	W

1. Mainline loss includes theoretical power loss at coupled port.

### Maximum Ratings


Parameter	Ratings
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C

Permanent damage may occur if any of these limits are exceeded.

### Pin Connections

Function	Pin Number
INPUT	1
OUTPUT	6
COUPLED	3
GROUND	2
75Ω TERM EXTERNAL	4
ISOLATE (DO NOT USE)	5

### Electrical Schematic

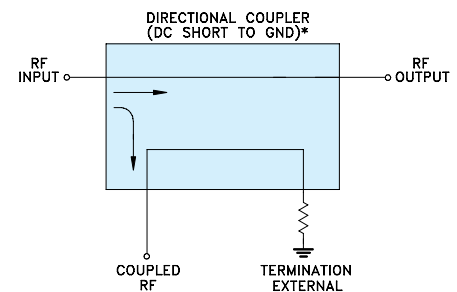

\* ELECTRICAL SCHEMATIC IS FOR DIRECTIONAL COUPLER WITH INTERNAL TRANSFORMER(S) AND EXTERNAL TERMINATION.

