

## ADP-SMAFRP-SMAF

### SMA RP (female) to SMA (female)

<b>Features</b>	
Frequency Range	DC-3GHz
Voltage Standing Wave Ratio	≤ 1.15
Impedance	50Ω
Temperature Range	-55~+155°C
Centre Conductor Retention Range	≥ 0.28N
Coupling nut Retention Force	≥ 180Nq
Insertion Loss	≤ 0.1dB/3GHz
Durability (mating)	> 500 Cycles
Insulation Resistance	≥ 5000MΩ
Working Voltage	355Vrms
Max Voltage (can withstand)	1000Vrms




<b>Material Information</b>	
Body	Nickel plated Brass
Pin/Socket contact	Gold plated Brass/beryllium-copper
Crimp ferrule	Nickel/gold plated Copper alloy
Insulator	PTFE

### Ordering Information

Part Number	Description
<b>ADP-SMAFRP-SMAF</b>	Adaptor SMA Rev Polarity (female) to SMA (female)

## VSWR

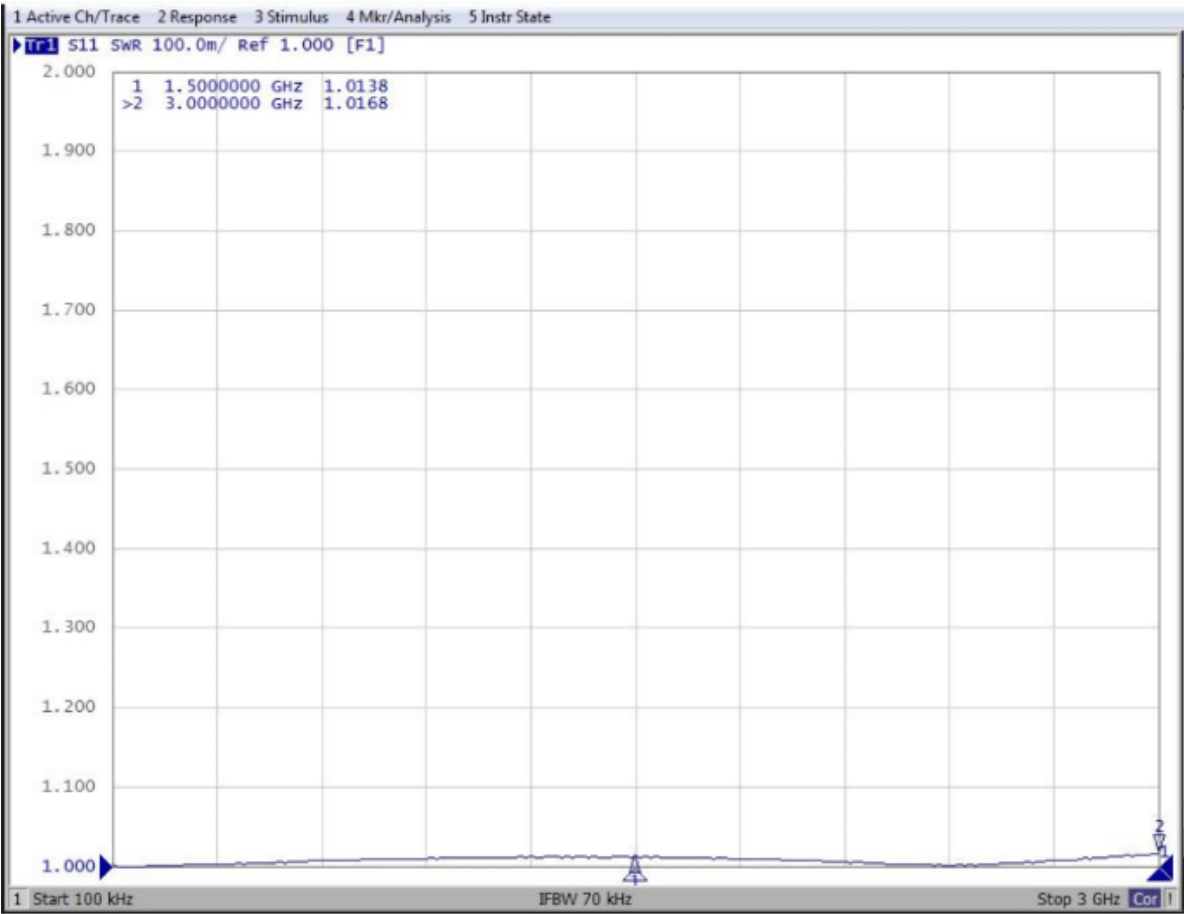

## Insertion Loss

