

ADP-SMAM-2SMAF

SMA(male) to 2 x SMA(Female)




Features	
Frequency Range	DC-3GHz
Voltage Standing Wave Ratio	≤ 1.15
Impedance	50 Ω
Temperature Range	-55~+155°C
Centre Conductor Retention Range	$\geq 0.28N$
Coupling nut Retention Force	$\geq 180Nq$
Insertion Loss	$\leq 0.1dB/3GHz$
Durability (mating)	>500 Cycles
Insulation Resistance	>5000M Ω
Working Voltage	355Vrms
Max Voltage (can withstand)	1000Vrms

Material Information	
Body	Gold Plate on Brass
Pin/Socket contact	Gold Plate on Beryllium Copper
Crimp ferrule	Gold Plate on Brass
Insulator	PTFE

Ordering Information

Part Number	Description
ADP-SMAM-2SMAF	Adaptor SMA(male) to 2 x SMA(Female)

VSWR

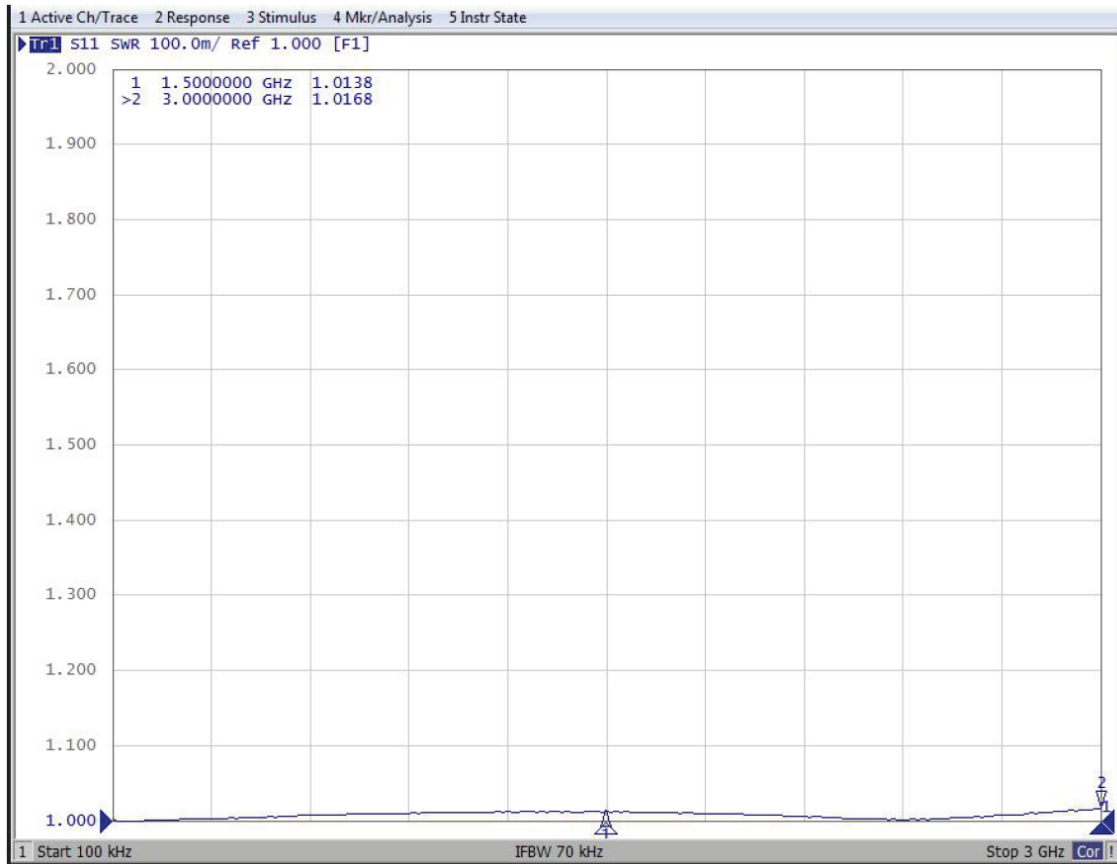

Insertion Loss

