



ADP-SMAM-SMAF-T-G

SMA Plug to SMA T Jack Adapter

The ADP-SMAM-SMAF-T-G is an SMA plug to SMA T jack adapter. Operating from 0 Hz to 12 GHz, the ADP-SMAM-SMAF-T-G combines superior performance, compact size, and a convenient threaded mating interface to provide a reliable, easy-to-use adapter. Additionally, all Linx SMA adapters meet RoHS lead free standards and are tested to meet requirements for corrosion resistance, vibration, mechanical and thermal shock.

FEATURES

- 0 to 12 GHz operation
- SMA plug (male socket) connection
 - Gold plated brass body
 - Gold plated brass center contact
- SMA T jack (female socket) connections
 - Gold plated brass body
 - Gold plated phosphor bronze center contact

APPLICATIONS

- Cellular IoT
 - LTE-M (Cat-M1), NB-IoT
- Cellular
 - 5G/4G LTE/3G/2G
- WiFi/WLAN
 - WiFi 6/6E
- GNSS
 - GPS, Galileo, GLONASS, BeiDou, QZSS
- Radar, Satellite Communications, Experimental
- Industrial, Commercial, Enterprise

ORDERING INFORMATION

Part Number	Description
ADP-SMAM-SMAF-T-G	SMA plug (male pin) to SMA T jack (female socket) adapter

Available from Linx Technologies and select distributors and representatives.

TABLE 1. ELECTRICAL SPECIFICATIONS

Parameter	Value	
Impedance	50 Ω	
Frequency Range	0 Hz to 12 GHz	
Contact Resistance	Center: ≤ 3.0 m Ω Outer: ≤ 2.0 m Ω	
Port to Port	Port 2 to Port 1	Port 2 to Port 3
Insertion Loss (dB max.)	3.7	4.1
VSWR (max.)	2.1	2.4

PRODUCT DIMENSIONS

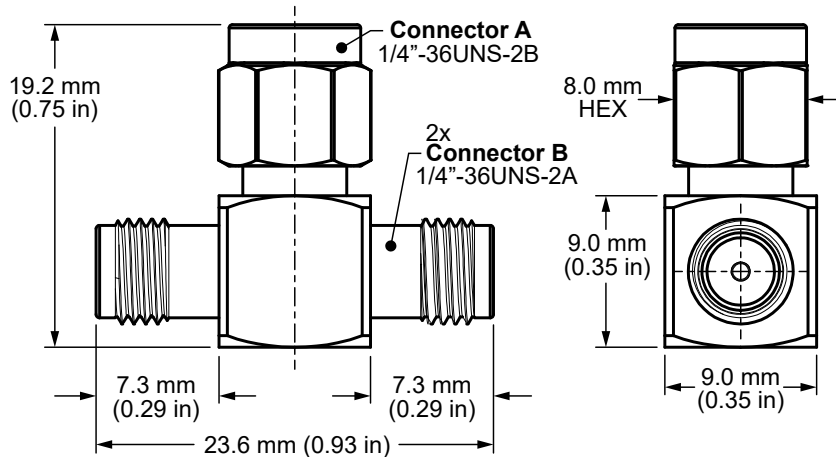


Figure 1. Product Dimensions for the ADP-SMAM-SMAF-T-G Adapter

TABLE 2. ADAPTER COMPONENTS

ADP-SMAM-SMAF-T-G	Connector A SMA plug (male pin)		Connector B SMA jack (female socket)	
	Material	Finish	Material	Finish
Connector Part	Brass	Gold	Brass	Gold
Body	Brass	Gold	Brass	Gold
Center Contact	Brass	Gold	Phosphor bronze	Gold
Insulator	PTFE	-	PTFE	-

TABLE 3. MECHANICAL SPECIFICATIONS

ADP-SMAM-SMAF-T-G	Connector A SMA plug (male pin)	Connector B SMA jack (female socket)
Mounting Type	Inline, Free-hanging	
Fastening Type	1/4\"-36UNS Threaded Coupling	1/4\"-36UNS Threaded Coupling
Interface in Accordance with	MIL-STD-348B	MIL-STD-348B
Recommended Torque	0.57 N·m (5.0 in·lbs)	0.57 N·m (5.0 in·lbs)
Coupling Nut Retention	60 lbs min.	60 lbs min.
Durability	500 cycles min.	500 cycles min.
Weight	9.2 g (0.32 oz)	

TABLE 4. ENVIRONMENTAL SPECIFICATIONS

MIL-STD, Method, Test Condition	
Corrosion (Salt spray)	MIL-STD-202 Method 101 test condition B
Thermal Shock	MIL-STD-202 Method 107 test condition C
Vibration	MIL-STD-202 Method 204 test condition B
Mechanical Shock	MIL-STD-202 Method 213 test condition B
Moisture Resistance	MIL-STD-202 Method 106 test condition D
Temperature Range	-65 °C to +165 °C
Environmental Compliance	RoHS

INSERTION LOSS

Figure 2 shows the Insertion Loss for the ADP-SMAM-SMAF-T-G adapter. Insertion loss is the loss of signal power (gain) resulting from the insertion of a device in a transmission line.

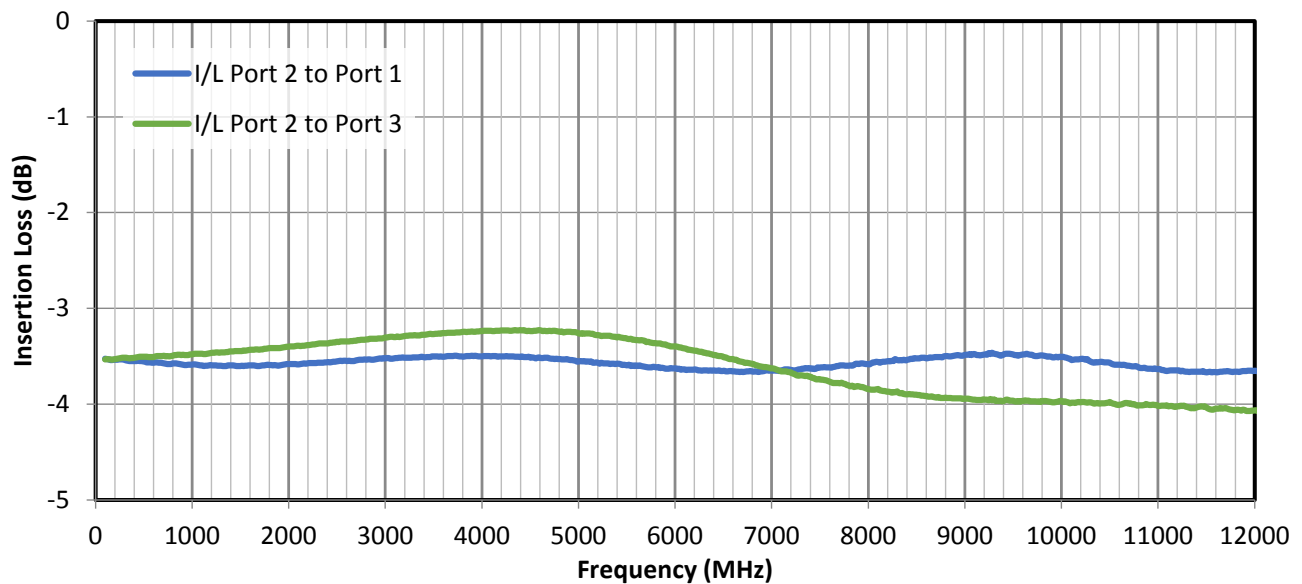


Figure 2. Insertion Loss for the ADP-SMAM-SMAF-T-G Adapter