

ADP-SMAM-SMAM90

SMA(male) to SMA(male) Right Angle

Features	
Frequency Range	DC-3GHz
Voltage Standing Wave Ratio	≤ 1.15
Impedance	50Ω
Temperature Range	-55~+155°C
Centre Conductor Retention Range	≥ 0.28N
Coupling nut Retention Force	≥ 180Nq
Insertion Loss	≤ 0.1dB/3GHz
Durability (mating)	> 500 Cycles
Insulation Resistance	≥ 5000MΩ
Working Voltage	355Vrms
Max Voltage (can withstand)	1000Vrms




Material Information	
Body	Gold plated Brass
Pin/Socket contact	Gold plated Brass/beryllium-copper
Crimp ferrule	Nickel/gold plated Copper alloy
Insulator	PTFE

Ordering Information

Part Number	Description
ADP-SMAM-SMAM90	Adaptor SMA(male) to SMA(male) Right Angle

VSWR

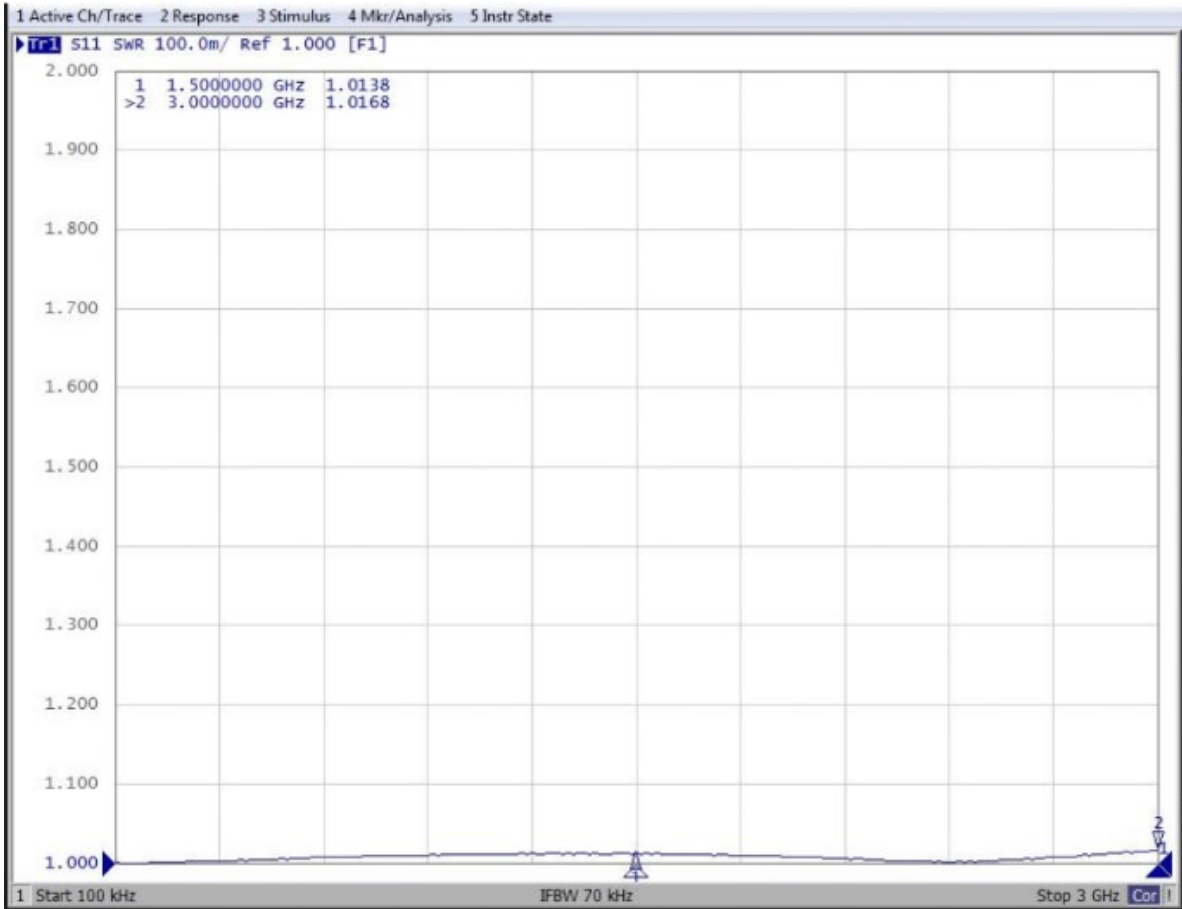

Insertion Loss

