

### Right Angle SMA Male Plug to SMA Female Jack

Model Number

ADT-8000-MF-SMA-02


**SPECIFICATIONS**

**Frequency:** DC - 18.0 GHz

**VSWR:** 1.05 + .010 f (GHz)

**Impedance:** 50 Ohms

**Finish:** Passivated Stainless Steel



Formerly SMA-028-8000 and SMA-8000-28-000-02

### Right Angle SMA Female Jack to SMA Female Jack

Model Number

ADT-8000-FF-SMA-02


**SPECIFICATIONS**

**Frequency:** DC - 18.0 GHz

**VSWR:** 1.05 + .010 f (GHz)

**Impedance:** 50 Ohms

**Finish:** Passivated Stainless Steel



Formerly SMA-026-8000 and SMA-8000-26-000-02

### Right Angle SMA Male Plug to SMA Male Plug

Model Number

ADT-8000-MM-SMA-02


**SPECIFICATIONS**

**Frequency:** DC - 18.0 GHz

**VSWR:** 1.05 + .010 f (GHz)

**Impedance:** 50 Ohms

**Finish:** Passivated Stainless Steel



### SMA Female Jack to SMA Female Jack - Bkhd Mount - Hermetic

Model Number

ADT-2824-FF-SMA-02


**SPECIFICATIONS**

**Frequency:** DC - 18.0 GHz

**VSWR:** 1.10 + .010 f (GHz)

**Impedance:** 50 Ohms

**Finish:** Passivated Stainless Steel

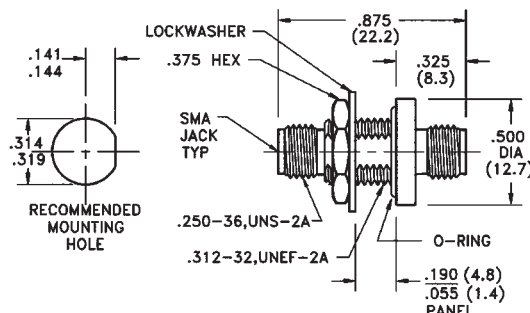

Standard finish is passivated stainless steel, for gold plating change -02 suffix to -00.