

LPWA/ISM External Antenna



AEACAD153029-S433



153.3 x Ø29.4 mm
RoHS/RoHS II Compliant
MSL = 1

Features

- LPWA/NB-IoT/ISM antenna
- Sub-GHz cellular band coverage
- Linear polarization
- Gain of 3 dBi
- Magnetic mounting

Applications

- LPWA/LoRa/SigFox/NB-IoT applications
- ISM applications
- IoT
- M2M
- Remote technology/monitoring
- Network devices
- Smart buildings
- Smart city
- Agriculture/environment
- Consumer tracking

Electrical Specifications

Parameters	Min.	Typ.	Max.	Units	Note
Frequency Range		433 ~ 960		MHz	
VSWR			4.5		
Polarization	Linear				
Impedance		50		Ω	
Gain		3		dBi	Zenith

Mechanical Characteristics

Parameters	Description
Connector	SMA
Cable Type	RG174/3M
Mounting	Magnet
Radom Material	ABS

Environmental Characteristics

Parameters	Description
Operating temperature	-40°C to +85°C
Relative Humidity	Up to 95 %
Vibration	10 to 55 Hz with 1.5 mm amplitude 2 hours

LPWA/ISM External Antenna




AEACAD153029-S433



153.3 x Ø29.4 mm
RoHS/RoHS II Compliant
MSL = 1

Dimensions

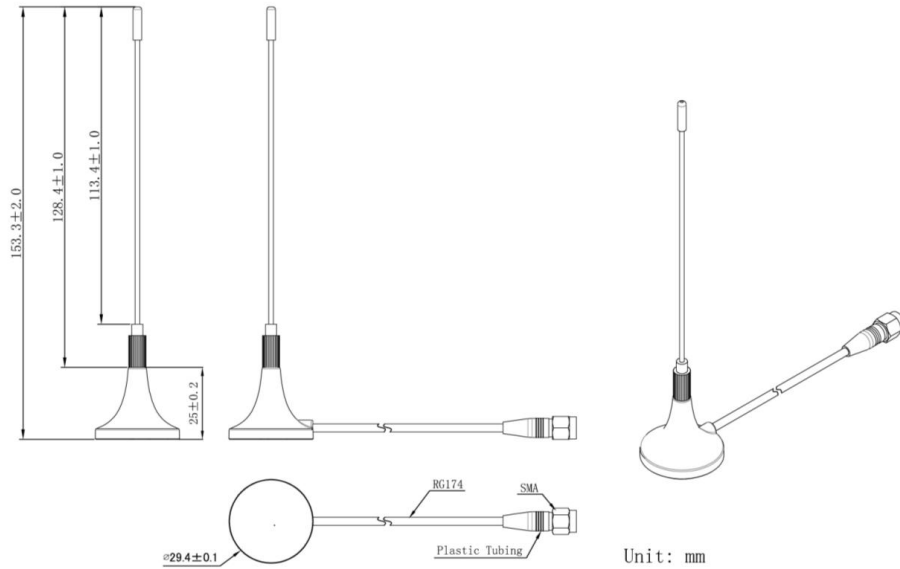

Product Image



LPWA/ISM External Antenna




AEACAD153029-S433



153.3 x Ø29.4 mm
RoHS/RoHS II Compliant
MSL = 1

VSWR

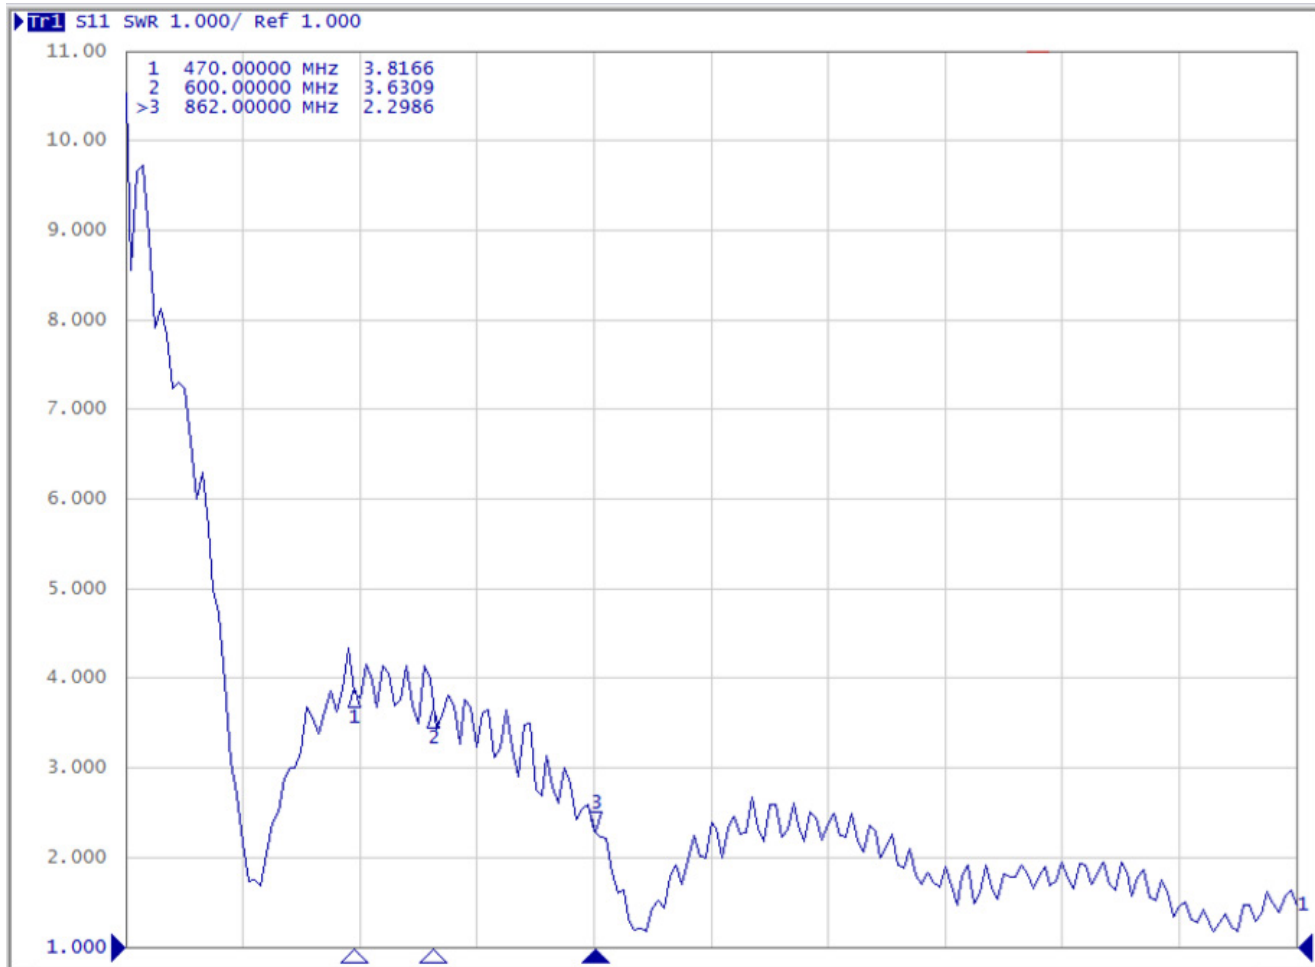

ATTENTION: Abracon LLC's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependent Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.



5101 Hidden Creek Ln Spicewood TX 78669
Phone: 512-371-6159 | Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 01.24.2019

ABRACON IS
ISO9001-2015
CERTIFIED