

**pui
audio**™ inc
a projects unlimited company

AI-1440-TWT-12V-R 14mm Indicator


3541 Stop Eight Road • Dayton, Ohio 45414

Product Overview

- 14mm diameter, 3-16 VDC self-drive indicator
- 80 dBA minimum output (12 VDC @ 10 cm) and 4 kHz continuous tone
- Noryl™ housing withstands Wave soldering temperatures
- Removable wash tag preserves performance




SPL vs Voltage (measured @ 10 cm)

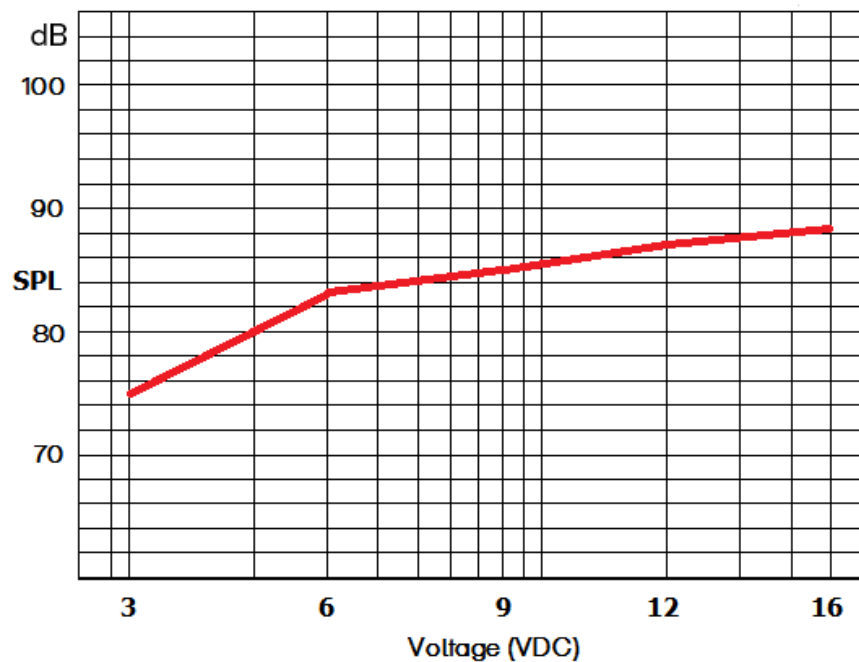

An Institute of the EICC and GeSI



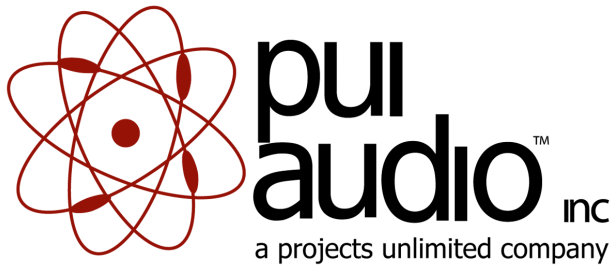

AI-1440-TWT-12V-R 14mm Indicator

Mechanical and Environment Testing	
Test Description	Test Condition
High Temperature	85°C (±2°C) with random humidity for 96 hours
Low Temperature	-25°C (±2°C) with random humidity for 96 hours
Humidity	40°C (±2°C) with 90% to 95% relative humidity for 96 hours
Vibration	0.75 mm movement modulated at 10-55 Hz for 3 hours
Drop Test	100 cm free fall onto wood board, 10 cycles
Temperature Cycle Test	-30°C to 80°C, 100 cycles

After tests, part shall rest for 2 hours. Parts are then tested for clean, pure tones.

