

1. SPECIFICATION

AK-150805-PM-6




ITEM		SPECIFICATIONS	
01	Type	Dynamic speaker	
02	Dimension	External diameter 15 mm	
03	Rated Input Power	0.5 W	
04	Max. Input Power	0.8 W for 1 minute	
05	Impedance	$8\Omega \pm 15\%$ at 1KHz 1V	
06	Resonance Frequency (Fo)	1000 Hz \pm 20% at Fo, 1V	
07	Sound pressure level	91 dB(0.5W/0.1M) \pm 3 dB	at AVE 1.2,1.4, 1.6, 1.8 KHz.
08	Frequency Range	Fo – 9.0 K Hz	
09	Total Harmonics Distortion	Max 10 % at 1 KHz, 0.1W.	

REV NO.

REVISION NOTE

APPROVAL

DATE

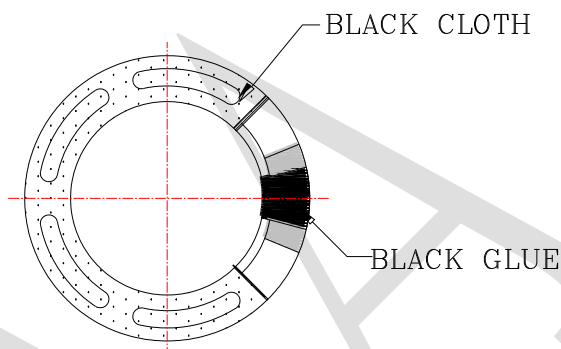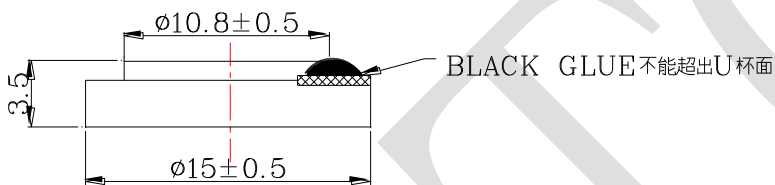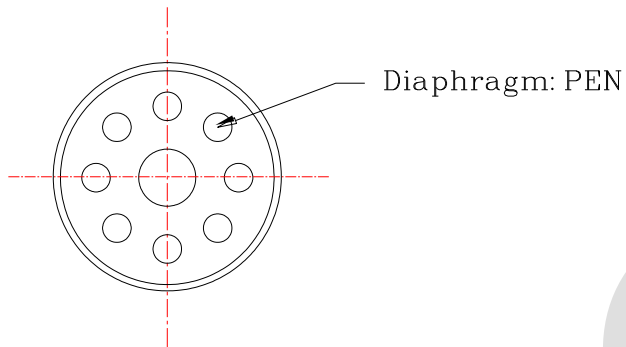

RoHS

TITLE: DYNAMIC SPEAKER		DRAWN: Moose	2018-06-21	SCALE: 2:1	SHEET: 1:1
PART NO. AK-150805-PM-6		DESIGNED: R&D OF AAT	UNITS: mm		
DWG NO. JXS15-08-02	1 REV	CHECKED:	TOLERANCE ± 0.5		
		APPROVAL:	UNLESS OTHERWISE SPECIFIED:		
		MATERIAL: SPCC/PBT	ONE PLACE DECIMAL \pm ***		
			TWO PLACE DECIMAL \pm ***		
			THREE PLACE DECIMAL \pm ***		



ADVANCED ACOUSTIC TECHNOLOGY CORPORATION