


1. SPECIFICATION

AK-200810-MM-1CV5

ITEM		SPECIFICATIONS	
01	Type	Dynamic speaker	
02	Dimension	External diameter 20 mm	
03	Rated Input Power	1.0 W	
04	Max. Input Power	1.5 W for 1 minute	
05	Impedance	$8\Omega \pm 15\%$ at 2KHz 1V	
06	Resonance Frequency (Fo)	1150 Hz \pm 20% at Fo, 1V	
07	Sound pressure level	94 dB(1.0W/0.1M) \pm 3 dB	at AVE 1.0K 1.2K 1.5K 1.8KHz.
08	Frequency Range	Fo – 20 K Hz	
09	Total Harmonics Distortion	Max 10 % at 1 KHz, 1.0W	

REV NO.	REVISION NOTE	APPROVAL	DATE
---------	---------------	----------	------

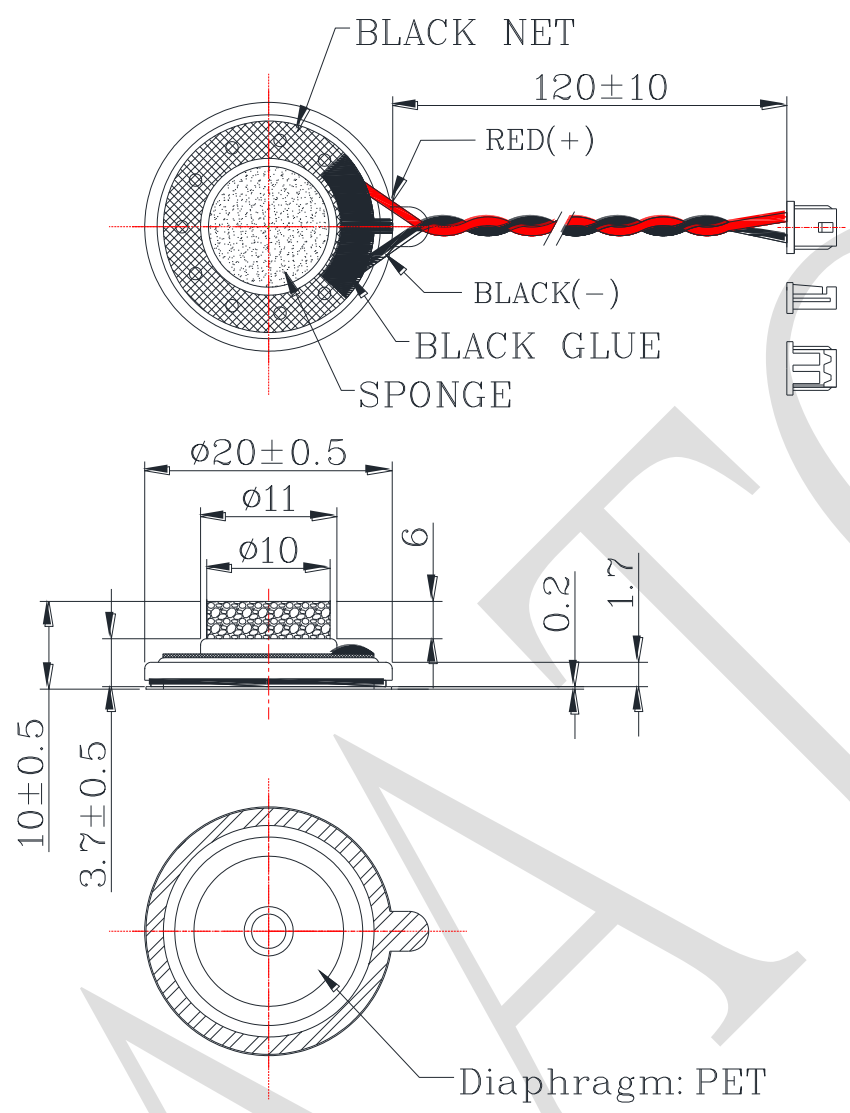

WIRE: UL1571, AWG30# (Strand part requires 46~50 turns)
CONNECTOR: Equivalent to MOLEX 51021-0200

RoHS

TITLE: DYNAMIC SPEAKER		DRAWN: Zack	2019/10/31	SCALE: 2:1	SHEET: 1:1
PART NO. AK-200810-MM-1CV5		DESIGNED: R&D OF AAT	UNITS: mm		
DWG NO. CX20103LP120-R08W1.0-B	1 REV	CHECKED:	TOLERANCE ± 0.5		
		APPROVAL:	UNLESS OTHERWISE SPECIFIED:		
		MATERIAL: SPCC	ONE PLACE DECIMAL ± ***		
				TWO PLACE DECIMAL ± ***	
				THREE PLACE DECIMAL ± ***	



ADVANCED ACOUSTIC TECHNOLOGY CORPORATION