


1. SPECIFICATIONS

AMB-O40J46-4CWH

01	Sensitivity	-46±3dB (0dB=1V/Pa,1KHz)
02	Standard Operation Voltage	2.0 V
03	Output Impedance	2.2 KΩ
04	Directivity	Omni directional
05	Frequency Range	100 - 10K Hz
06	Max. Operation Voltage	10V
07	Current Consumption	Max.0.5mA
08	Sensitivity Reduction	Within -3dB 0dB=1V/Pa,1KHz Vs=2.0to 1.5V
09	S/N Ratio	≥58dB
10	Sound Pressure Level	110 dB
11	Operating Temperature	-20~+60°C
12	Storage Temperature	-25~+70°C

REV NO.	REVISION NOTE	APPROVAL	DATE
---------	---------------	----------	------

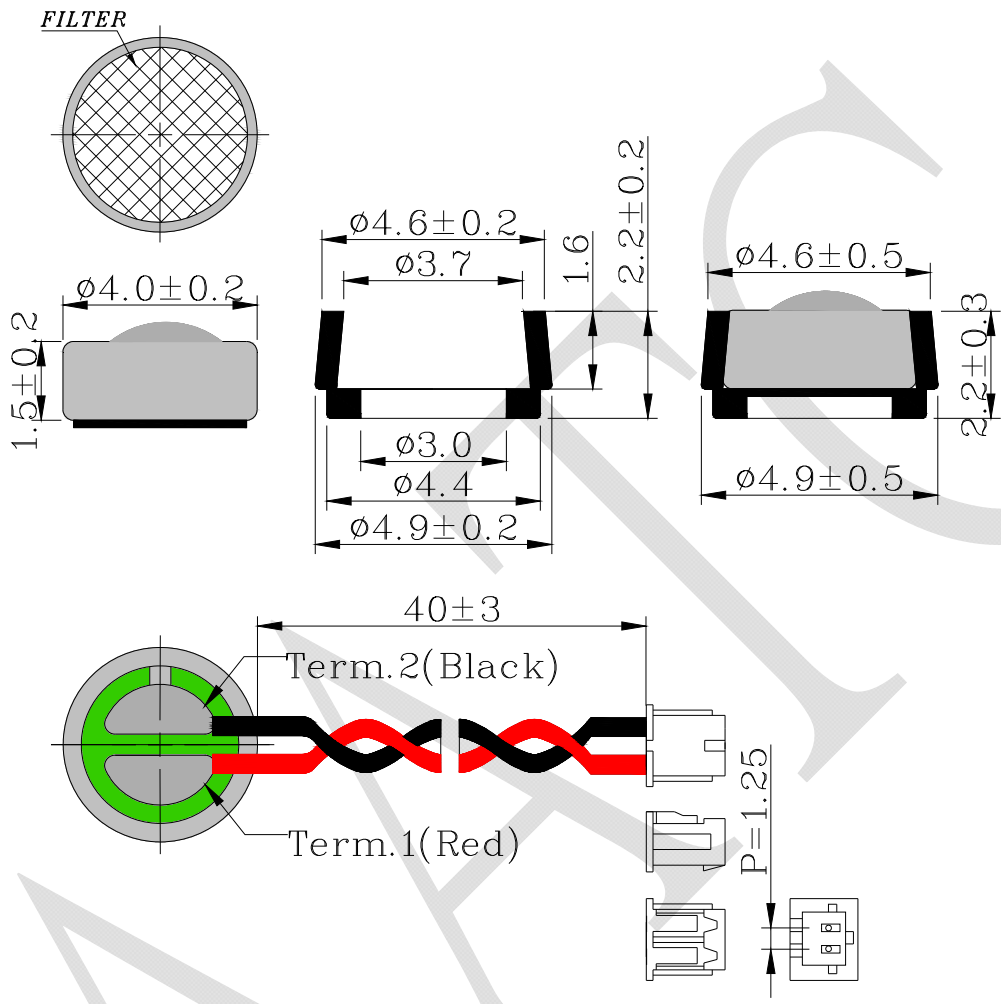

WIRE: UL1571, AWG30#
 Connector: Equivalent to Molex 51021-0200
 Holder: DD-EQ-JTA49-07

RoHS

TITLE: MICROPHONE		DRAWN: <i>Zack</i> 2018/10/11	SCALE: 5:1	SHEET: 1 of 1
PART NO. AMB-040J46-4CWH	1	DESIGNED: R & D OF AAT	UNITS: mm	
DWG NO. B4015AL-SFN-D42-M 11755		CHECKED:	TOLERANCE ± 0.3	
	REV	APPROVAL:	UNLESS OTHERWISE SPECIFIED:	
		MATERIAL: AL	ONE PLACE DECIMAL ± ***	
			TWO PLACE DECIMAL ± ***	
			THREE PLACE DECIMAL ± ***	



ADVANCED ACOUSTIC TECHNOLOGY CORPORATION