


1. SPECIFICATIONS

AMF-O60C42-NB3-LF



01	Electret's Type	Foil type
02	Sensitivity	-42±3dB (0dB=1V/Pa,1KHz)
03	Standard Operation Voltage	2.0 V
04	Output Impedance	2.2 KΩ
05	Directivity	Omni directional
06	Frequency Range	100 - 20K Hz
07	Max. Operation Voltage	10V
08	Current Consumption	Max.0.5mA
09	Sensitivity Reduction	Within -3dB 0dB=1V/Pa,1KHz Vs=2.0to 1.5V
10	S/N Ratio	≥58dB
11	Sound Pressure Level	110 dB

REV NO.	REVISION NOTE	APPROVAL	DATE
---------	---------------	----------	------

FILTER

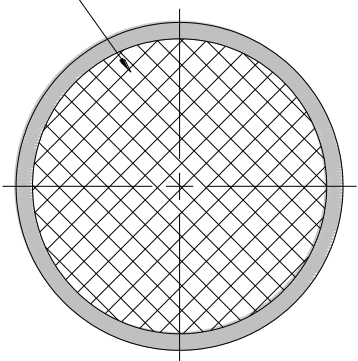

2- $\phi 0.4 \pm 0.1$

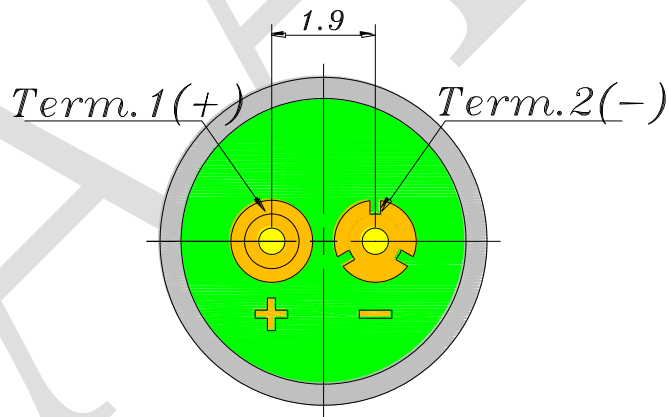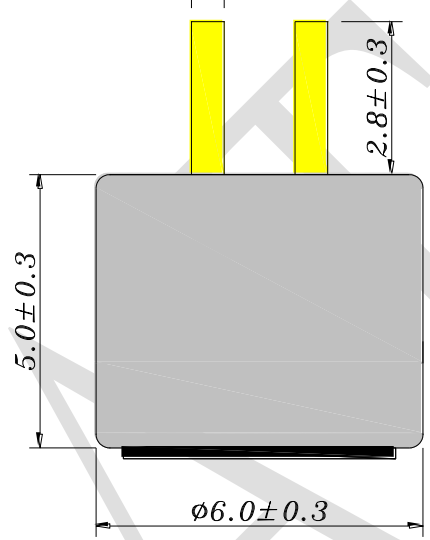

RoHS

TITLE:	MICROPHONE	DRAWN:	<i>Jack</i> 2016/06/15	SCALE:	5:1	SHEET:	1 of 1
PART NO.	AMF-060C42-NB3-LF	DESIGNED:	R & D OF AAT	UNITS:	mm	TOLERANCE	± 0.3
DWG NO.	F'6050AP-SB 11524	3 REV	CHECKED:	UNLESS OTHERWISE SPECIFIED:	ONE PLACE DECIMAL \pm ***	TWO PLACE DECIMAL \pm ***	THREE PLACE DECIMAL \pm ***
			APPROVAL:				
			MATERIAL:	AL			



ADVANCED ACOUSTIC TECHNOLOGY CORPORATION