


1. SPECIFICATIONS

AMF-O97A38-2CW

01	Sensitivity	-38±3dB (0dB=1V/Pa,1KHz)
02	Standard Operation Voltage	2.0 V
03	Output Impedance	2.2 KΩ
04	Directivity	Omni directional
05	Frequency Range	100 - 10K Hz
06	Max. Operation Voltage	10V
07	Current Consumption	Max.0.5mA
08	Sensitivity Reduction	Within -3dB 0dB=1V/Pa,1KHz Vs=2.0to 1.5V
09	S/N Ratio	≥58dB
10	Sound Pressure Level	110 dB

REV NO.	REVISION NOTE	APPROVAL	DATE
---------	---------------	----------	------

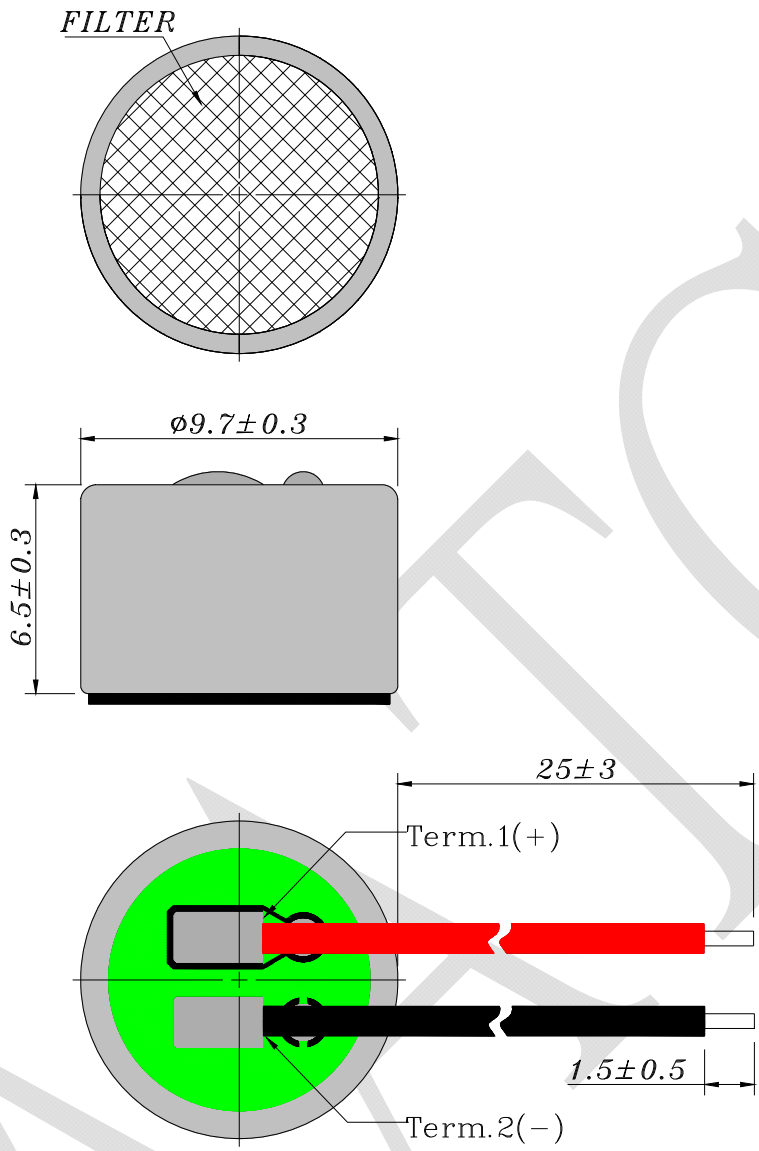

WIRE: UL1571,AWG 28#

RoHS

TITLE: MICROPHONE		DRAWN: Zack	2019/03/12	SCALE: 5:1	SHEET: 1 of 1
PART NO. AMF-097A38-2CW		DESIGNED: R & D OF AAT	UNITS: mm		
DWG NO. F9765AL-SN-30	1 REV	CHECKED:	TOLERANCE ± 0.3		
		APPROVAL:	UNLESS OTHERWISE SPECIFIED:		
		MATERIAL: Al	ONE PLACE DECIMAL \pm ***		
			TWO PLACE DECIMAL \pm ***		
			THREE PLACE DECIMAL \pm ***		



ADVANCED ACOUSTIC TECHNOLOGY CORPORATION