


1. SPECIFICATIONS

AMF-O97L42-CWH



01	Electret's Type	Foil type
02	Sensitivity	-42±3dB (0dB=1V/Pa,1KHz)
03	Standard Operation Voltage	1.5 V
04	Output Impedance	1.5KΩ
05	Directivity	Omni directional
06	Frequency Range	100 - 20K Hz
07	Max. Operation Voltage	10V
08	Current Consumption	Max.0.5mA
09	Sensitivity Reduction	Within -3dB 0dB=1V/Pa,1KHz Vs=2.0to 1.5V
10	S/N Ratio	≥58dB
11	Sound Pressure Level	110 dB

REV NO.	REVISION NOTE	APPROVAL	DATE
---------	---------------	----------	------

FILTER



Wires: UL1571,28#AWG
 Connector: Equivalent to JST PHR-2
 Holder: DD-EQ-JTE11-05

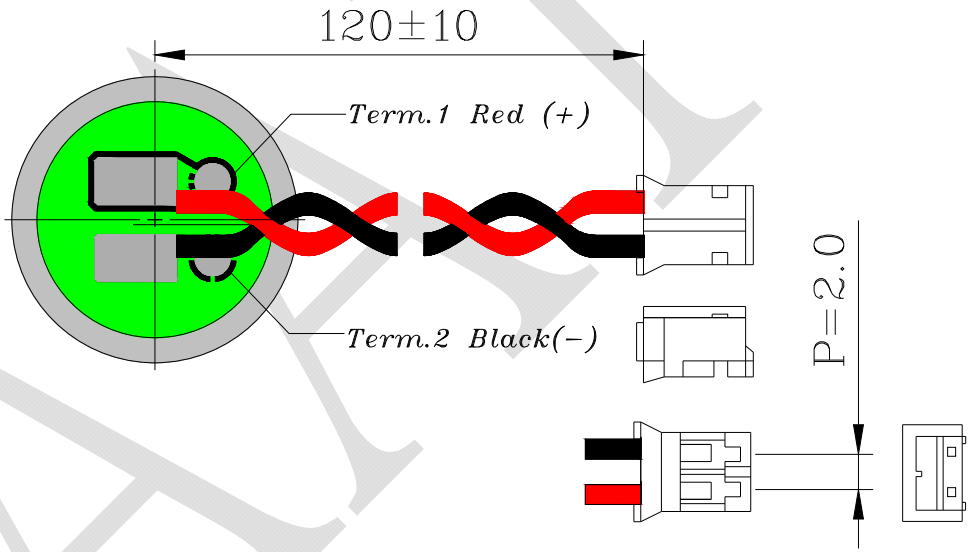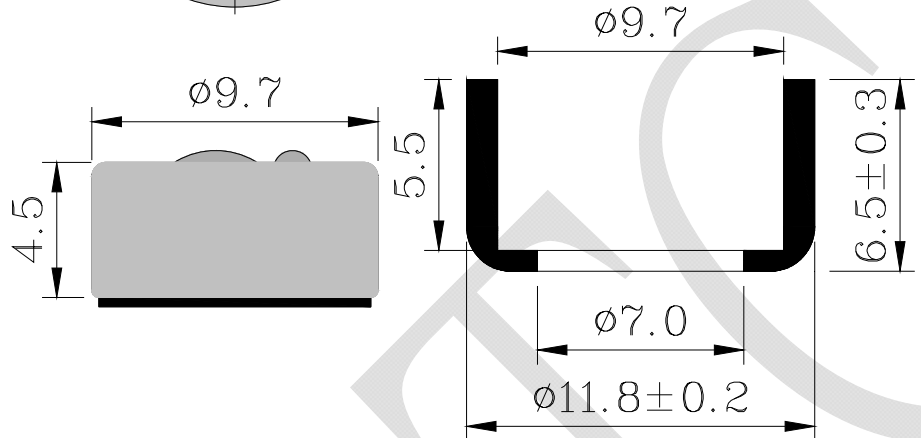

RoHS

TITLE: MICROPHONE	DRAWN: Zack 2010/04/01	SCALE: 5:1	SHEET: 1 of 1
PART NO. AMF-097L45-CWH	DESIGNED: R & D OF AAT	UNITS: mm	TOLERANCE ± 0.3
DWG NO. F9745AL-SN-D120-M 9734	CHECKED:	UNLESS OTHERWISE SPECIFIED:	
	APPROVAL:	ONE PLACE DECIMAL ± ***	
	MATERIAL: *****	TWO PLACE DECIMAL ± ***	
1 REV		THREE PLACE DECIMAL ± ***	



ADVANCED ACOUSTIC TECHNOLOGY CORPORATION