


1. SPECIFICATIONS

AMF-U60C47-NW-LF

01	Electret Type	FOIL type
02	Sensitivity	-47±3dB (0dB=1V/Pa,1KHz) 0 Degree
03	Standard Operation Voltage	2.0V
04	Output Impedance (Max)	2.2KΩ
05	Directivity	Unidirectional
06	Frequency Range	70 - 20K Hz
07	Max.Operation Voltage	10V
08	Current Consumption	Max.0.5mA
09	Sensitivity Reduction	Within -3dB 0dB=1V/Pa,1KHz Vs=2.0 to 1.5V
10	S/N Ratio	> 55dB

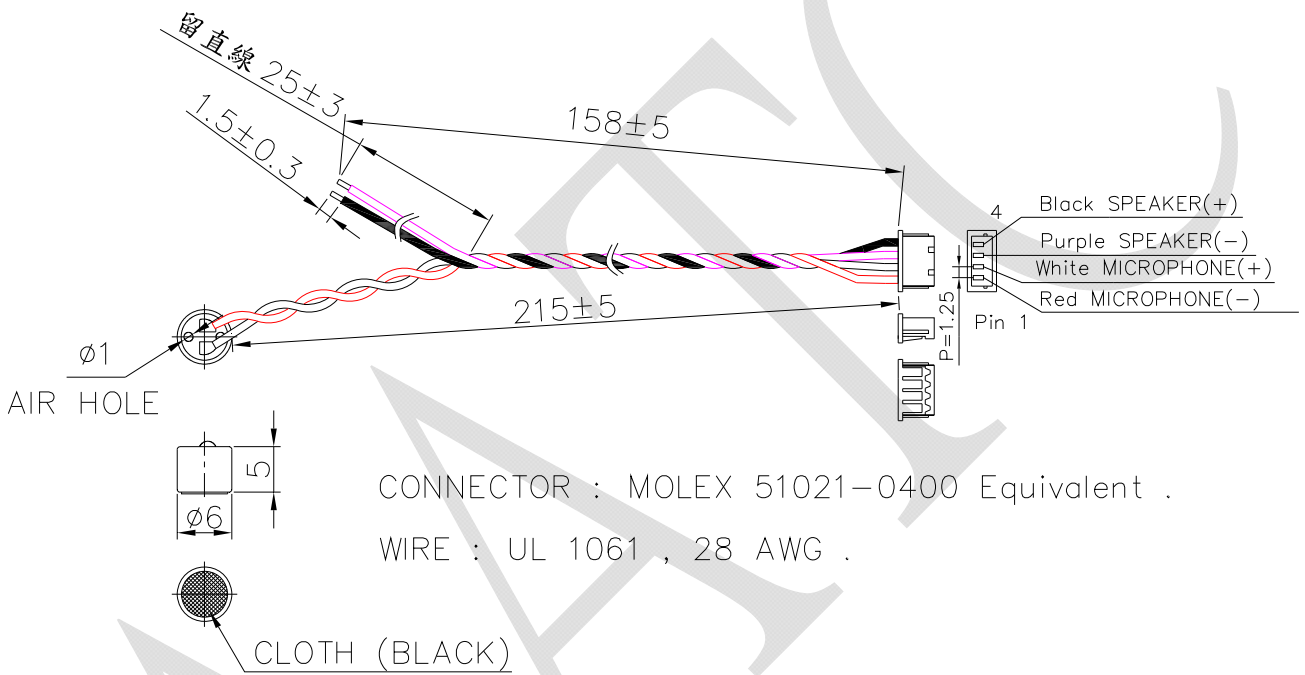

TITLE: MICROPHONE		DRAWN: JOHN	09/05/2006	SCALE: 1:1	SHEET: 1 of 1
PART NO. AMF-U60C47-NW-LF		DESIGNED: R&D OF AAT	UNITS: mm		
DWG NO. DTM-1379		CHECKED:	TOLERANCE ± 0.2		
		APPROVAL:	UNLESS OTHERWISE SPECIFIED: ONE PLACE DECIMAL ± *** TWO PLACE DECIMAL ± *** THREE PLACE DECIMAL ± ***		
REV 1		MATERIAL: *****			

