

ID Industrial Series 916 MHz Remote-Mount Dipole Whip Antenna

The ID series industrial dipole antennas are designed for rugged outdoor applications and are rated for a wide temperature range and UV exposure for long-term reliability.

The 916 MHz ID antenna is designed for sub-1 GHz and low-power, wide-area (LPWA) applications including LoRaWAN® and Sigfox®, and ISM band applications in the 902 MHz to 930 MHz range.

The antenna can be mounted using the integrated mounting flange with 2 screws for permanent installation or with the optional adhesive patch. The antenna connects via RG-58/U coaxial cable in lengths of 1 or 2 meters which allows the antenna to be remote-mounted for optimal RF performance, and is terminated with an SMA plug (male pin), or RP-SMA plug (female socket) connector for FCC Part 15 compliant applications.



Features

- Performance at 916 MHz
 - VSWR: ≤ 1.6
 - Peak Gain: 1.9 dBi
 - Efficiency: 54%
- Weatherized assembly for outdoor installation
 - Antenna rated IP-67
 - UV protection, UL 2556 Section 4.2.8.5 or equivalent
- Low-profile antenna with Integrated mounting flange
- SMA plug (male pin) or RP-SMA plug (female socket) connector

Applications

- Low-power, wide-area (LPWA) applications
 - LoRaWAN®
 - Sigfox®
 - WiFi HaLow™
- ISM band applications
 - Bluetooth®
 - ZigBee®
- Internet of Things (IoT) devices
- Smart Home networking
 - Security systems
 - Home weather stations
- Remote sensing, monitoring and control

Ordering Information

Part Number	Description
ANT-916-ID-1000-SMA	Antenna with 1 m of RG-58/U coaxial cable, terminated in an SMA plug (male pin)
ANT-916-ID-1000-RPS	Antenna with 1 m of RG-58/U coaxial cable, terminated in an RP-SMA plug (female socket)
ANT-916-ID-2000-SMA	Antenna with 2 m of RG-58/U coaxial cable, terminated in an SMA plug (male pin)
ANT-916-ID-2000-RPS	Antenna with 2 m of RG-58/U coaxial cable, terminated in an RP-SMA plug (female socket)
MEC-PSA-ID	Optional adhesive patch

Available from Linx Technologies and select distributors and representatives.

Electrical Specifications

ANT-916-ID	916 MHz		
Frequency Range	902 MHz to 930 MHz		
VSWR (max)	1.6		
Peak Gain (dBi)	1.9		
Average Gain (dBi)	-2.7		
Efficiency (%)	54		
Cable	RG-58/U in 1 m (39.37 in) or 2 m (78.74 in) length		
Connection	SMA plug (male pin) or RP-SMA plug (female socket)		
Impedance	50 Ω	Polarization	Linear
Wavelength	1/2-wave	Electrical Type	Dipole
Radiation	Omnidirectional	Max Power	10 W
Dimensions	Length: 109.6 mm (4.31 in), Diameter: 9.5 mm (0.37 in)		
Weight	58.9 g (2.08 oz) or 97.5 g (3.44 oz)		
Operating Temp. Range	-40 °C to +80 °C		

VSWR

Figure 1 provides the voltage standing wave ratio (VSWR) across the antenna bandwidth. VSWR describes the power reflected from the antenna back to the radio. A lower VSWR value indicates better antenna performance at a given frequency. Reflected power is also shown on the right-side vertical axis as a gauge of the percentage of transmitter power reflected back from the antenna.

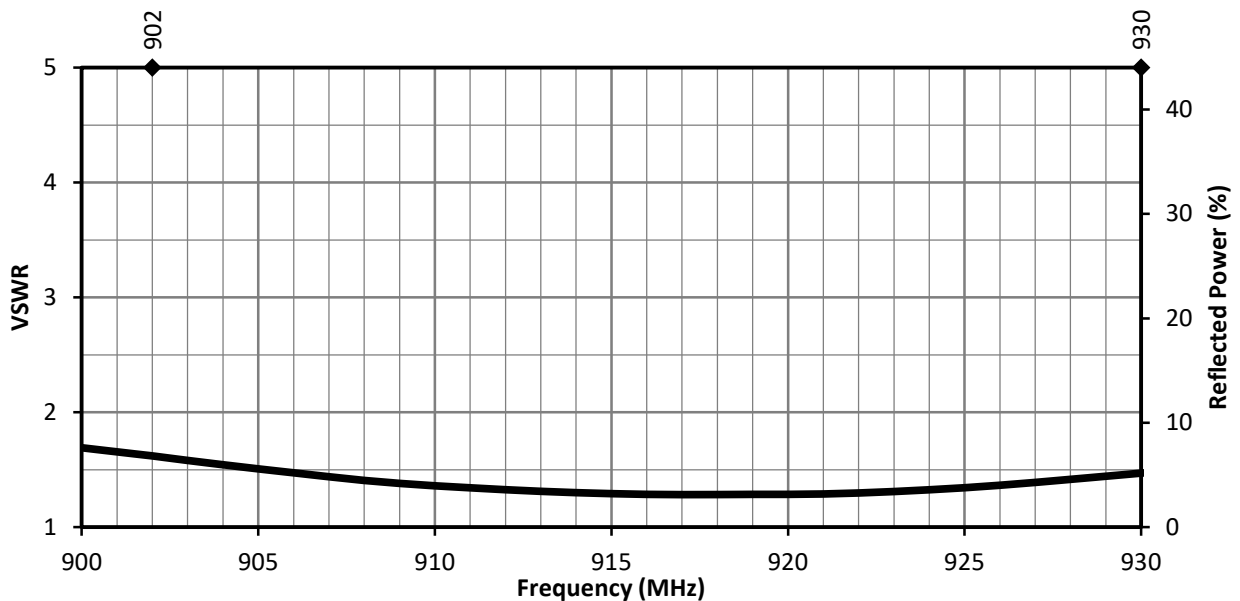


Figure 1. ANT-916-ID VSWR

Website: <http://linxtechnologies.com> • Phone: +1 (541) 471-6256 • E-MAIL: info@linxtechnologies.com • Linx Offices: 159 Ort Lane, Merlin, OR, US 97532

Linx Technologies reserves the right to make changes to the product(s) or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Wireless Made Simple is a registered trademark of Linx Acquisitions LLC. LoRaWAN is a registered trademark of Semtech Corporation. Sigfox is a registered trademark of SIGFOX. Wi-Fi HaLow is a trademark of Wi-Fi Alliance. Other product and brand names may be trademarks or registered trademarks of their respective owners.

Copyright © 2020 Linx Technologies. All Rights Reserved.

