



ANT-PCB4520

Features

- 850/900/1800/1900MHz
- Omni Directional 1/2 Wave
- Miniature 45 x 20 x 1mm
- VSWR <3.0
- RG178 Coax 50Ω Impedance
- 0dBi Gain (nominal)
- Vertical Polarization
- Admitted Radiation Power 1W
- iPex/UFL Connector
- Operating temp -30 to +85°C




Applications

- Embedded GSM Systems
- For Worldwide Use

Ordering Information

PART No	Description
ANT-PCB4520-FL	Miniature PCB Quad Band Antenna

Mechanical Detail

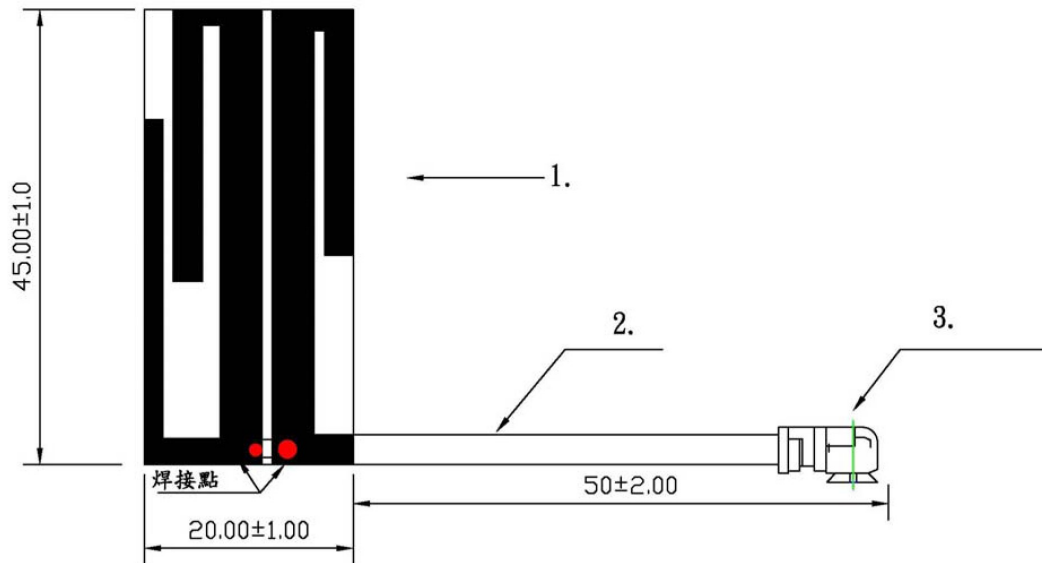

Performance Data — Test VSWR

