


# Printed Circuit Board Fuseholders and Fuseblocks For 5mm x 20mm Fuses




**HTC-45M  
PCB Vertical Mount Fuseholder**

250V AC, 6.3A, 2.5W  
Bayonet Cap/Carrier  
See Specifications below.

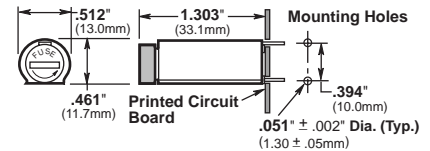


**HTC-50M  
PCB Horizontal Mount Fuseholder**

250V AC, 6.3A, 2.5W  
Bayonet Cap/Carrier  
See Specifications below.

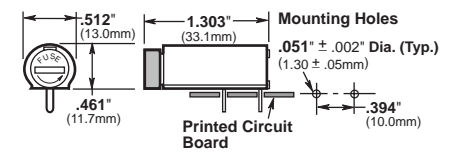



**HTC-60M, HTC-65M  
PC Board Mount Fuseholder**

Valox 420 SEO; Bronze  
See Specifications below.

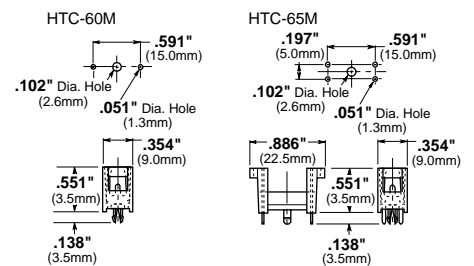


**HTC-15M & HTC-140M  
PCB Fuseblock & Snap-On Cover**

250V, 6.3A, 1.6W  
See Specifications below.

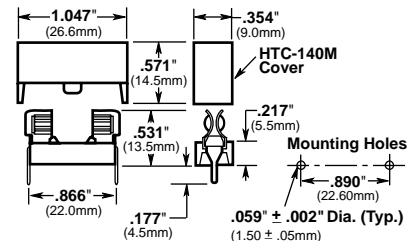

**HTC-200M  
PC Board Mount Fuseclip**

For 5mm diameter fuses  
Tape and Fan Fold packed  
Tin plated bronze

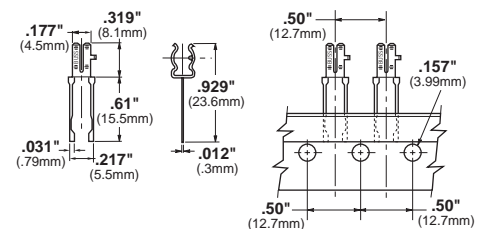

All tolerances (±0.005", ±0.13mm)

**SPECIFICATION DATA**

**Terminals** — Brass, tin plated.

**Molded Materials** — High temperature thermoplastic that meets the flammability ratings of UL 94-VO (HTC-15M material meets UL94-V1); Glow Wire Test: 960°C per IEC 695-2-1.

**Solderability** — In accordance with IEC 68-2-20.

**Electrical** — Contact Resistance: ≤ 10mΩ; Insulation Resistance: ≥ 10MΩ; Dielectric Strength ≥ 2000 VAC.

**Shock Safety** — PC2 (fuseholders).

**Agency Approvals** — HTC-45M, HTC-50M U.L. Recognized (Guide IZLT2, File # E14853; 6.3A, 250V; CSA Certified (Class 6225-01, File # 47235; 10A, 250V) Semko: (9226032; 6.3A, 250V) . No Agency Listings on HTC-15M, HTC-200M, HTC-60M and HTC-65M. HTC-140M.

**Packaging** — Standard Qty 10 (No Prefix), Bulk Qty 100 (Prefix Catalog Number with **BK**). Ammo Pack (HTC-200M) 1000 pieces per box (Prefix Catalog Number **TR**).

# Panel Mount Fuseholders

# HTC


For 5mm x 20mm Fuses



**HTC-35M**  
**Panel Mount Fuseholder**


250V, 6.3A, 2.5W  
Threaded Cap/Carrier  
See Specifications Below

All tolerances ( $\pm 0.005"$ ,  $\pm 0.13\text{mm}$ )

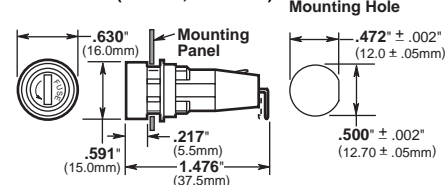


**HTC-40M**  
**Panel Mount Fuseholder**

250V, 6.3A, 2.5W  
Screwdriver slot

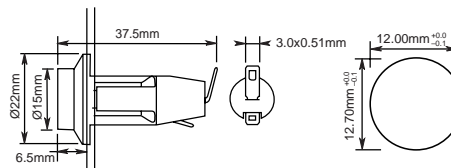


**HTC-55M**  
**Panel Mount Fuseholder**

250V, 6.3A, 2.5W  
Bayonet Cap/Carrier  
See Specifications Below

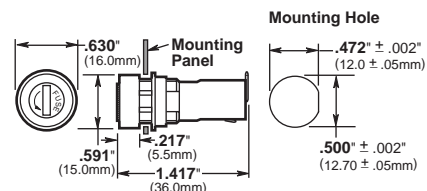

**HTC-70M**  
**Panel Mount Fuseholder**

250V, 10A, 2.5W  
Bayonet Cap/Carrier  
See Specifications Below

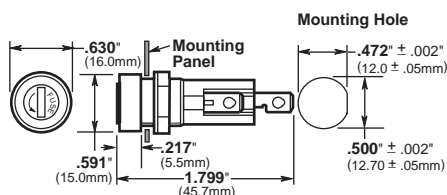

**SPECIFICATION DATA**

**Terminals** — Brass, tin plated, with 3mm HTC-35M, -55M, (4.8mm HTC-70M).

**Molded Materials** — High temperature thermoplastic that meets the flammability ratings of UL 94-V0; Glow Wire Test: 960°C per IEC 695-2-1.

**Solderability** — In accordance with IEC 68-2-20.

**Agency Approvals**— UL Recognized Guide 1ZLT2, File E14852; CSA Certified Class 6225-01, File 47235; SEMKO 9005230

**Electrical** — Contact Resistance:  $\leq 10\text{m}\Omega$ ; Insulation Resistance:  $\geq 10\text{M}\Omega$ ; Dielectric Strength  $\geq 2000\text{ VAC}$ .

**Shock Safety** — PC2 (fuseholders).

**Packaging** — Standard Qty 10 (No Prefix), Bulk Qty 100 (Prefix Catalog Number with BK). Ammo Pack (HTC-200M) 1000 pieces per box (Prefix Catalog Number TR).

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this BIF document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.