


## 1. SPECIFICATION

AR-1032RA-14C

ITEM		SPECIFICATIONS
01	Type	Dynamic 10 mm receiver unit
02	Sound pressure level	111 dB $\pm$ 3 dB at 1KHz 180mV with IEC318 coupler.
03	Impedance	32 $\Omega$ $\pm$ 15% at 1 KHz
04	Frequency Range	100 – 10K Hz
05	Rated Input Power	5 m W
06	Max. Input Power	10 m W
07	Total Harmonics Distortion	Max 10 % at 1 KHz,5 m W.

REV NO.	REVISION NOTE	APPROVAL	DATE
---------	---------------	----------	------

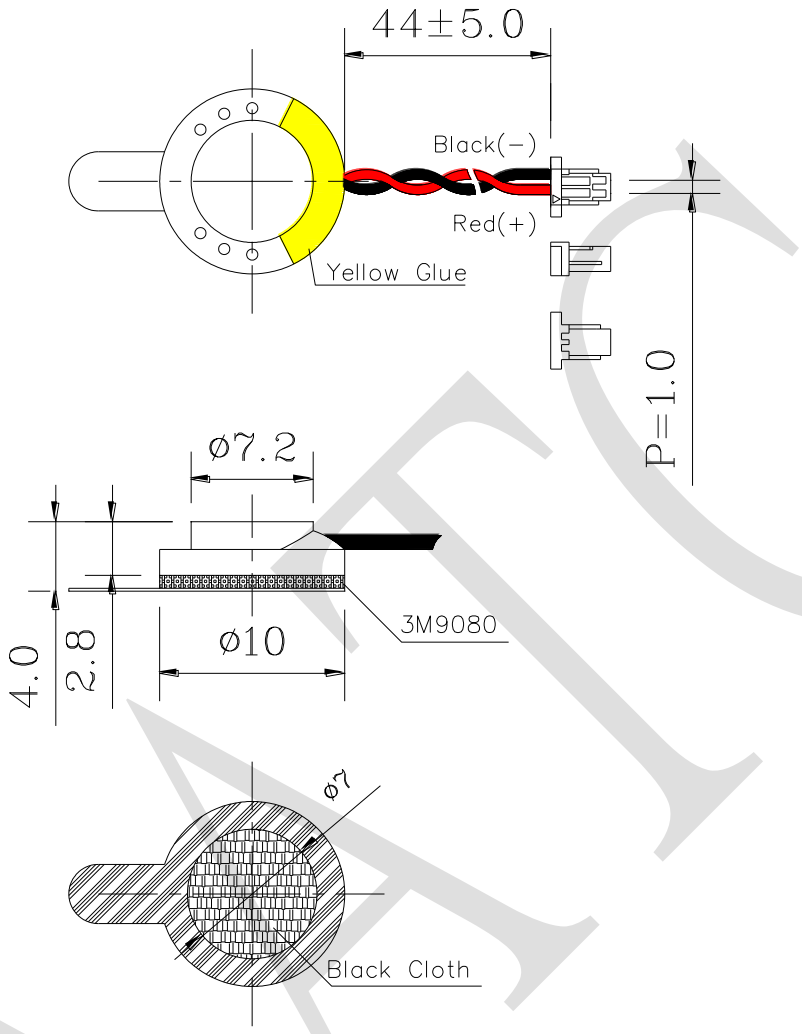

CONNECTOR : JST-SHR-02V-S-B .(德通)  
 WIRE : UL 1571 , 30AWG .(德通)

RoHS

TITLE: DYNAMIC RECEIVER		DRAWN: <b>Zack</b>	2012/12/27	SCALE: 2:1	SHEET: 1:1
PART NO. AR-1032RA-14C	2	DESIGNED: R&D OF AAT	UNITS: mm		
DWG NO. HS-101201		CHECKED:	TOLERANCE ± 0.5		
REV		APPROVAL:	UNLESS OTHERWISE SPECIFIED: ONE PLACE DECIMAL ± *** TWO PLACE DECIMAL ± *** THREE PLACE DECIMAL ± ***		
		MATERIAL: *****			



**ADVANCED ACOUSTIC TECHNOLOGY CORPORATION**