

RFID Reader (Passive)

ARRUN5-915.000MHz

RoHS/RoHS II Compliant
MSL level: Not Applicable



120.0 x 120.0 x 9.5mm

FEATURES:

- High Gain
- Easy to install
- RF Cable and Connector
- RoHS Compliant


TYPICAL APPLICATIONS:

RFID systems for Logistic & Inventory Management of Retail, Pharmaceutical, Automotive Industries; Industrial automation, Contactless smart cards.


STANDARD SPECIFICATIONS:

| Parameters | Min. | Typ. | Max. | Units | Note |
|---------------------|------|-------|------|-------|---------------------------------|
| Center Frequency | | 915±3 | | MHz | |
| V.S.W.R | | 1.5 | | | |
| Bandwidth | 20.0 | | | MHz | V.S.W.R<1.5 |
| Impedence | | 50 | | Ω | |
| Gain | | 5.5 | | dBi | Based on 120×120mm ground plane |
| Polarization | | RHCP | | | |
| Working Temperature | -40 | | +80 | °C | |
| Storage Temperature | -45 | | +85 | °C | |

SMITH CHART:

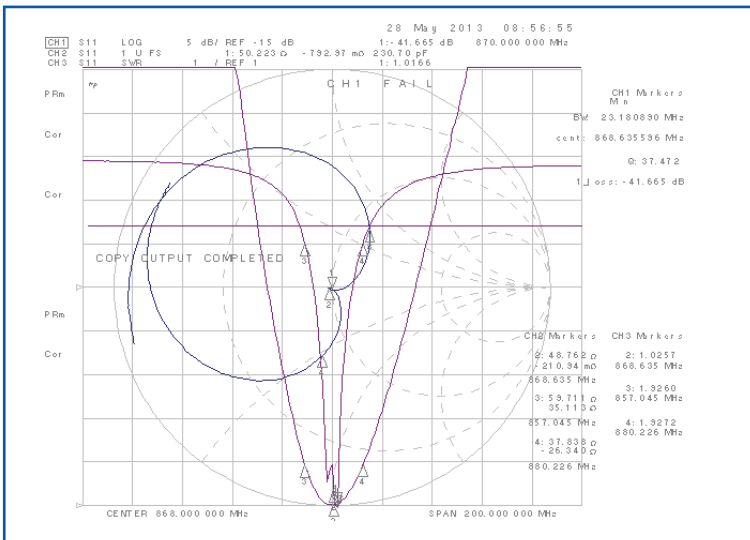

RADIATION PATTERN

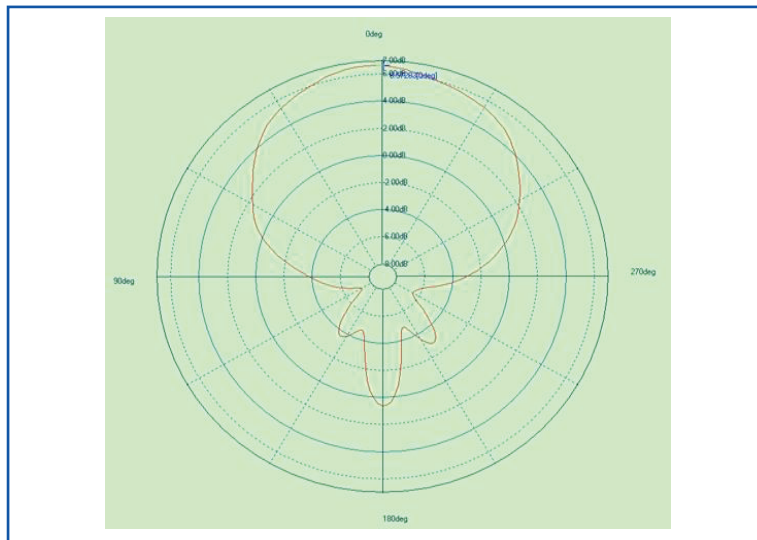

OUTLINE DRAWING:

| Description | Material |
|--------------|--|
| Antenna Type | Dielectric Ceramics 80x80x6mm |
| PCB | FR4, 120mm |
| RF Cable | RG178, Ø 2.7±0.3mm, L1=60±5mm, L=110±5mm |
| RF Connector | MMCX-JW3 |
| Thickness | 9.5mm Max |

Other Tolerance: ±0.5mm

Unit: mm

RFID Reader (Passive)

ARRUN5-915.000MHz

RoHS/RoHS II Compliant



120.0 x 120.0 x 9.5mm

TAPE & REEL:

Each small box contains 5pcs of RFID reader. There are 60 pcs per outer box.

| Package Type | Quantity |
|--------------|----------|
| Small Box | 5 pcs |
| Outer Box | 60 pcs |

Unit: mm

CAUTION:

- (1) Do not apply excess mechanical stress to the component body or terminations. Do not attempt to re-form or bend the components as this will cause damage to the component.
- (2) Do not expose the component to open flame.
- (3) This specification applies to the functionality of the component as a single unit. Please insure the component is thoroughly evaluated in the application circuit.

NOTE:

- 1) The parts are manufactured in accordance with this specification. If other conditions and specifications which are required for this specification, please contact ABRACON for more information.
- 2) ABRACON will supply the parts in accordance with this specification unless we receive a written request to modify prior to an order placement.
- 3) In no case shall ABRACON be liable for any product failure from in appropriate handling or operation of the item beyond the scope of this specification.
- 4) When changing your production process, please notify ABRACON immediately.
- 5) ABRACON Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. ABRACON's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from ABRACON Corporation is required. Please contact ABRACON Corporation for more information.
- 6) All specifications and Marking will be subject to change without notice.

ATTENTION: Abracon LLC's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependent Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.