

- Ground
- Power
- LED
- Internal Pin
- SWD Pin
- Digital Pin
- Analog Pin
- Other Pin
- Microcontroller's Port
- High Density Connector



**⚠ POWER LIMITS**  
Depends on the Board used

NOTE: CIPO/COPI have previously been referred to as MISO/MOSI



The LoRa® connector is available only in the version with LoRa® Connectivity (ASX00026)

The Ethernet connector is available only in the version with Ethernet Connectivity (ASX00021)

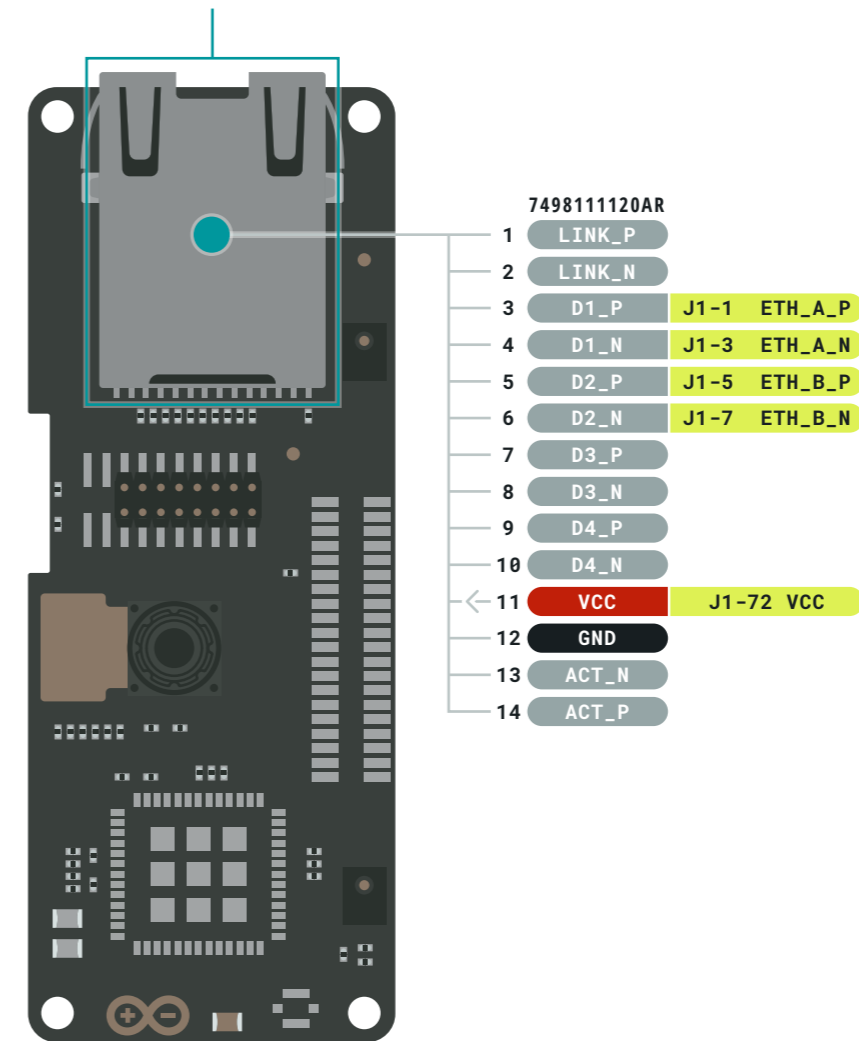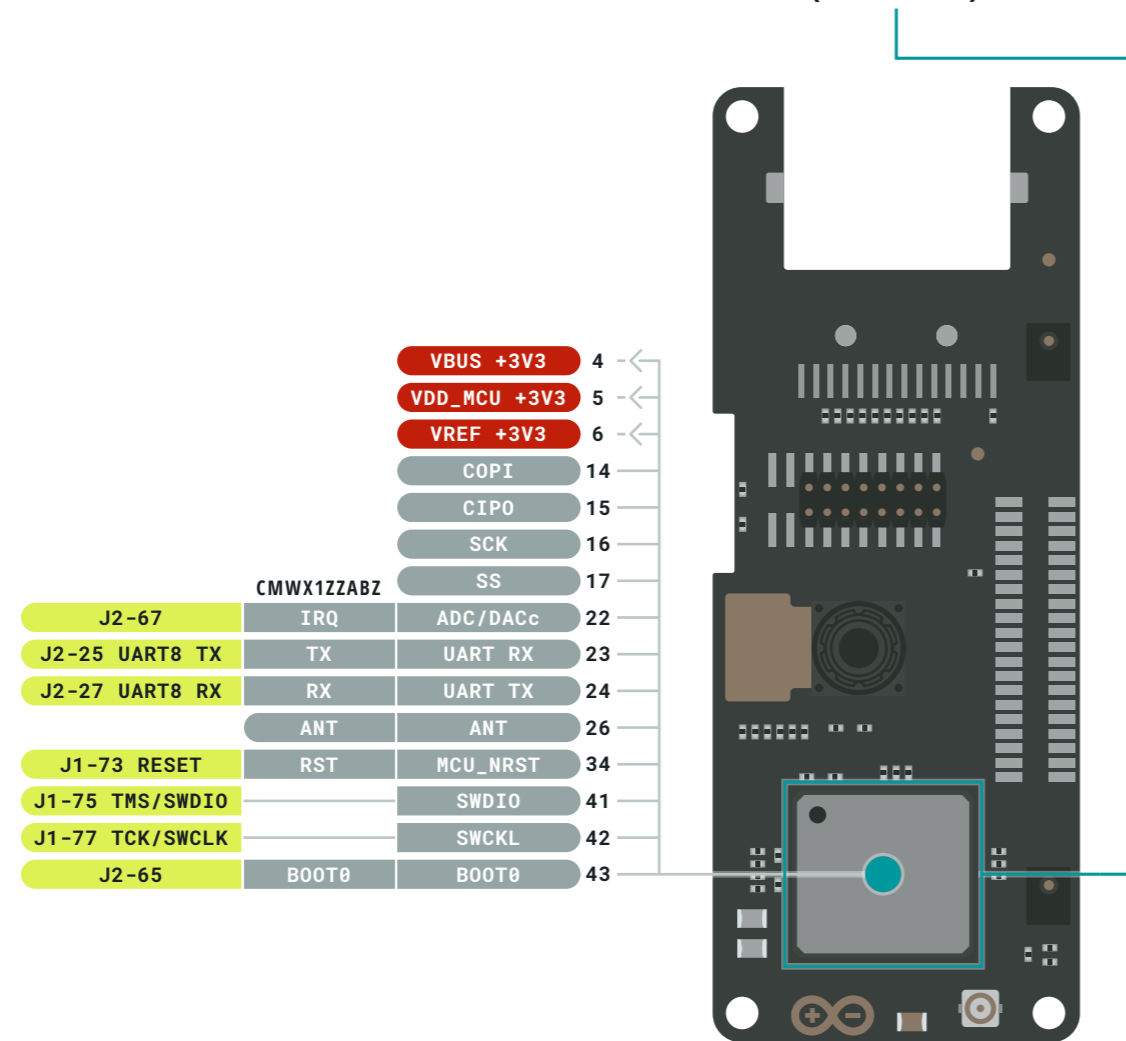


- Ground
- Power
- LED
- Internal Pin
- SWD Pin
- Digital Pin
- Analog Pin
- Other Pin
- Microcontroller's Port
- High Density Connector

**⚠ POWER LIMITS**  
Depends on the Board used

NOTE: CIPO/COPI have previously been referred to as MISO/MOSI



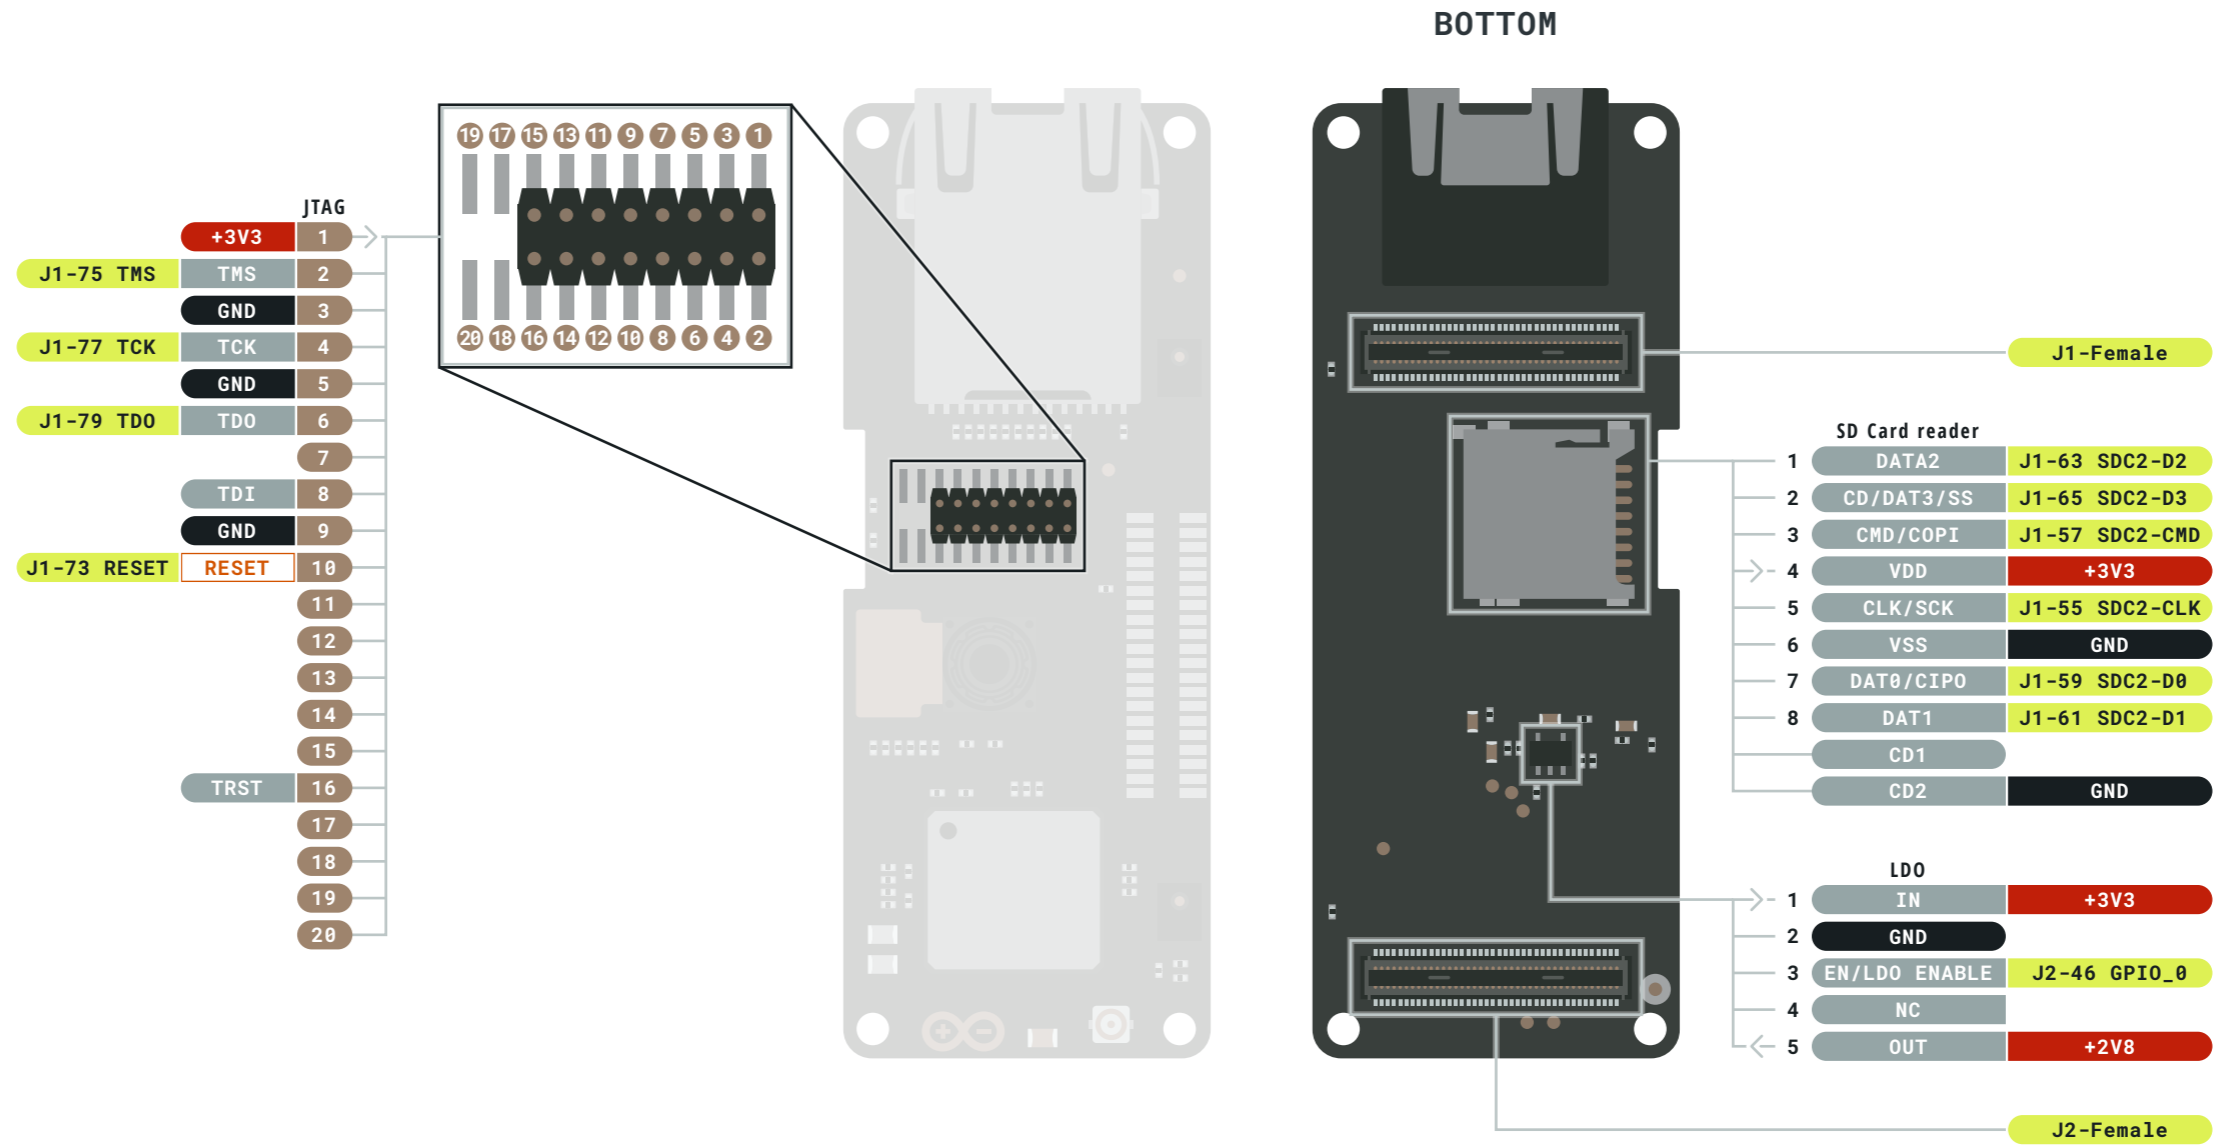

- Ground
- Power
- LED
- Internal Pin
- SWD Pin
- Digital Pin
- Analog Pin
- Other Pin
- Microcontroller's Port
- High Density Connector

**⚠ POWER LIMITS**  
Depends on the Board used

NOTE: CIPO/COPI have previously been referred to as MISO/MOSI

