
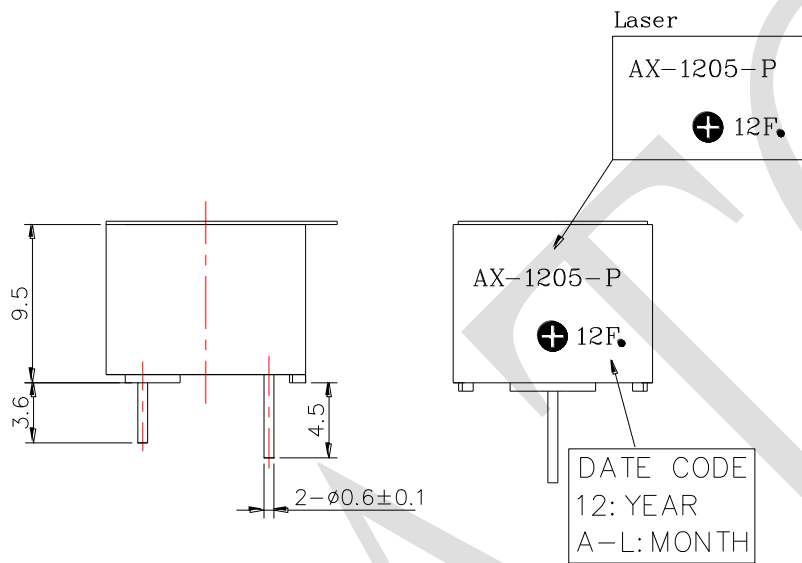


1. SPECIFICATION


AX-1205-P

ITEM		UNITS	SPECIFICATIONS	CONDITIONS
01	Rated Voltage	V	5	
02	Operating Voltage	V	3 ~ 7	
03	Consumption Current	mA (Max)	30	Rated Voltage
04	Resonant Frequency	Hz	2300 ± 300	Rated Voltage
05	Response times	ms	≥ 100	
06	Sound pressure level	dB(A) Min.	85	Distance at 10cm Rated Voltage / Resonant Frequency

REV NO.	REVISION NOTE	APPROVAL	DATE
---------	---------------	----------	------

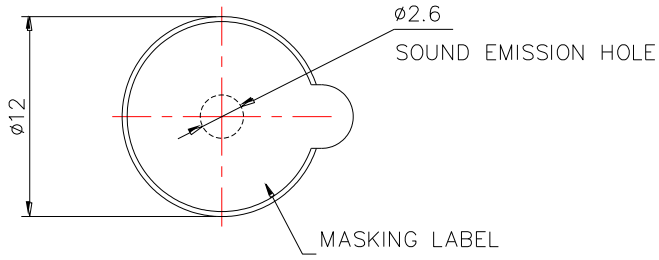

DATE CODE
 12: YEAR
 A-L: MONTH
 12=西元2012年
 A=一月
 B=二月
 C=三月
 D=四月

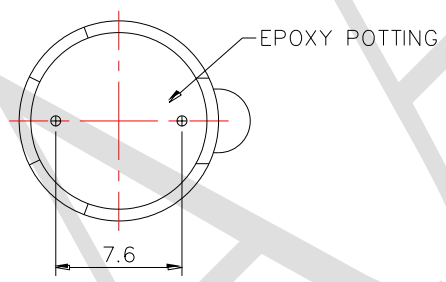

RoHS

TITLE: ELECTRO MAGNETIC BUZZER		DRAWN: Zak 2019/05/16	SCALE: 3/1	SHEET: 1 of 1
PART NO. AX-1205-P		DESIGNED: R&D OF AAT	UNITS: mm	
DWG NO. UGCM1205XP4.5/3.6IC-2	5 REV	CHECKED:	TOLERANCE ± 0.5	
		APPROVAL:	UNLESS OTHERWISE SPECIFIED:	
		MATERIAL: PBT	ONE PLACE DECIMAL ± *** TWO PLACE DECIMAL ± *** THREE PLACE DECIMAL ± ***	



ADVANCED ACOUSTIC TECHNOLOGY CORPORATION