



Applications

- Temperature measurement and compensation in
 - mobile phone applications (e.g. battery pack, TCXO, LCD)
 - data systems
 - automotive electronics

Features

- Multilayer SMD NTC with inner electrodes
- Ni barrier termination (AgNiSn)
- High accuracy: $\pm 5\%$ in resistance, B value tolerance down to $\pm 1,5\%$ available on request
- Excellent long-term ageing stability in high-temperature and high-humidity environment
- Superior resistance stability during soldering (change $< 1\%$)

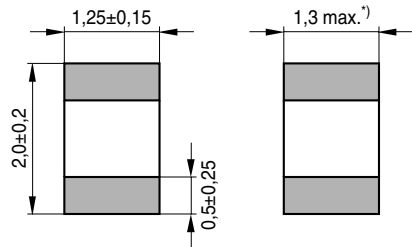

■ Termination

TNT0421-1-E

* Slimline version 0,9 max. available upon request

 Dimensions in mm
Approx. weight 13 mg

Options

 Alternative resistance ratings, resistance tol. $< 5\%$ and B value tol. $< 3\%$ available on request

Delivery mode

Blister tape, 180-mm reel, PU: 3000 pcs (standard); 330-mm reel, PU: 12000 pcs (on request)

Climatic category (IEC 60068-1)		55/125/56	
Max. power at 25 °C (on PCB)	$P_{25}^{1)}$	210	mW
Resistance tolerance	$\Delta R_N/R_N$	$\pm 5\%, \pm 10\%$	
Rated temperature	T_N	25	°C
B value tolerance	$\Delta B/B$	$\pm 3\%$	
Dissipation factor (on PCB)	$\delta_{th}^{1)}$	approx. 3,5	mW/K
Thermal cooling time constant (on PCB)	$\tau_c^{1)}$	approx. 10,0	s
Heat capacity	$C_{th}^{1)}$	approx. 35,0	mJ/K

R_{25}	No. of R/T characteristic	$B_{25/50}$	$B_{25/85}$	$B_{25/100}$	Ordering code
Ω		K	K	K	
47	8501	3470	3540	3550	B57411V2470+062
100	8501	3470	3540	3550	B57411V2101+062
150	8501	3470	3540	3550	B57411V2151+062
220	8501	3470	3540	3550	B57411V2221+062
330	8501	3470	3540	3550	B57411V2331+062

1) Depends on mounting situation



R_{25}	No. of R/T characteristic	$B_{25/50}$	$B_{25/85}$	$B_{25/100}$	Ordering code
Ω		K	K	K	
470	8502	3940	3980	4000	B57421V2471+062
680	8502	3940	3980	4000	B57421V2681+062
1,0 k	8502	3940	3980	4000	B57421V2102+062
1,5 k	8502	3940	3980	4000	B57421V2152+062
10 k	8502	3940	3980	4000	B57421V2103+062
2,2 k	8503	4390	4470	4500	B57431V2222+062
3,3 k	8503	4390	4470	4500	B57431V2332+062
4,7 k	8503	4390	4470	4500	B57431V2472+062
6,8 k	8503	4390	4470	4500	B57431V2682+062
10 k	8503	4390	4470	4500	B57431V2103+062
15 k	8503	4390	4470	4500	B57431V2153+062
22 k	8503	4390	4470	4500	B57431V2223+062
33 k	8503	4390	4470	4500	B57431V2333+062
47 k	8503	4390	4470	4500	B57431V2473+062
68 k	8503	4390	4470	4500	B57431V2683+062
100 k	8503	4390	4470	4500	B57431V2104+062

+: J for $\Delta R_N/R_N = \pm 5\%$

K for $\Delta R_N/R_N = \pm 10\%$