



# BAS16W-AU


## SURFACE MOUNT SWITCHING DIODES

<b>VOLTAGE</b>	<b>100 Volt</b>	<b>POWER</b>	<b>200mWatt</b>
----------------	-----------------	--------------	-----------------

**SOT-323** Unit : inch(mm)

### FEATURES

- Fast switching Speed.
- Electrically Identical to Standard JEDEC
- High Conductance
- Surface Mount Package Ideally Suited for Automatic Insertion
- AEC-Q101 qualified
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

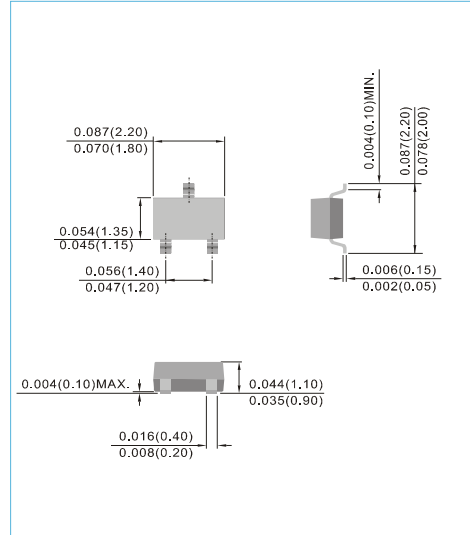


### MECHANICAL DATA

Case: SOT-323 plastic case.

Terminals: Solderable per MIL-STD-750, Method 2026

Standard packaging: 8mm tape

Approx weight: 0.00018 ounces, 0.005 grams



## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (T<sub>J</sub>=25°C unless otherwise noted)

PARAMETER	SYMBOL	VALUE	UNITS
Marking Code		A6	
Reverse Voltage	V <sub>R</sub>	75	V
Peak Reverse Voltage	V <sub>RM</sub>	100	V
RMS Voltage	V <sub>RMS</sub>	50	V
Maximum DC Blocking Voltage	V <sub>DC</sub>	75	V
Maximum Average Forward Current at T <sub>A</sub> =25°C	I <sub>AV</sub>	150	mA
Peak Forward Surge Current, 1μs	I <sub>FSM</sub>	4	A
Power Dissipation Derate Above 25°C	P <sub>TOT</sub>	200	mW
Maximum Forward Voltage	V <sub>F</sub>	0.855 / 0.01A	V
Maximum DC Reverse Current at Rated DC Blocking Voltage T <sub>J</sub> =25°C	I <sub>R</sub>	1@75V	μA
Junction Capacitance (Note1)	C <sub>J</sub>	2	pF
Maximum Reverse Recovery (Note2)	T <sub>RR</sub>	6	ns
Typical Thermal Resistance	R <sub>θJA</sub>	640	°C / W
Operation and Storage Temperature Range	T <sub>J</sub>	-55 to +150	°C


NOTE :

1. C<sub>J</sub> at V<sub>R</sub>=0, f=1MHZ


2. From I<sub>F</sub>=10mA to I<sub>R</sub>=1mA, V<sub>R</sub>=6Volts, R<sub>L</sub>=100Ω




# BAS16W-AU

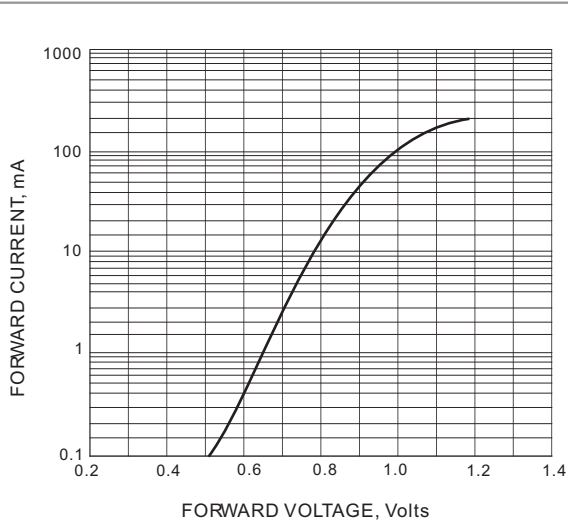

**FIG. 1-TYPICAL FORWARD CHARACTERISTIC**

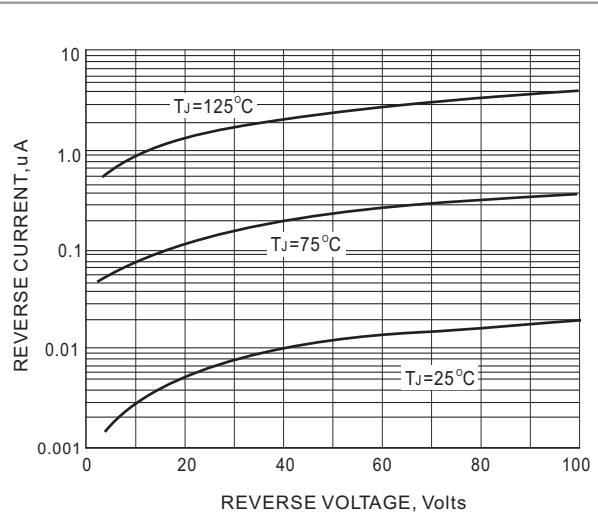

**FIG. 2-TYPICAL REVERSE CHARACTERISTICS**

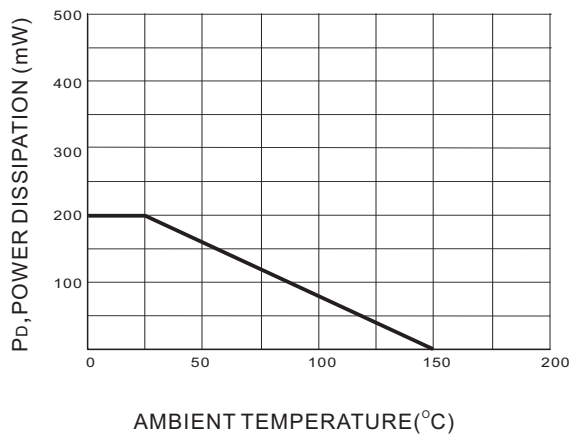


**FIG. 3 POWER DERATING CURVE**



# BAS16W-AU

## MOUNTING PAD LAYOUT

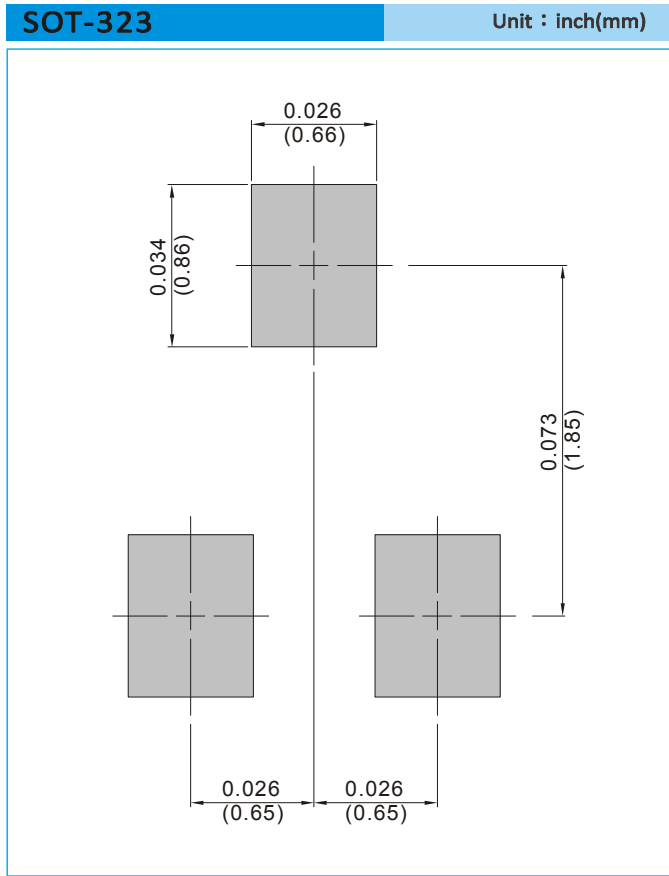

## ORDER INFORMATION

- Packing information  
T/R - 12K per 13" plastic Reel  
T/R - 3K per 7" plastic Reel



## BAS16W-AU

### Part No\_packing code\_Version

BAS16W-AU\_R1\_000A1

BAS16W-AU\_R2\_000A1

For example :

**RB500V-40\_R2\_00001**



Packing Code <b>XX</b>				Version Code <b>XXXXX</b>		
Packing type	1 <sup>st</sup> Code	Packing size code	2 <sup>nd</sup> Code	HF or RoHS	1 <sup>st</sup> Code	2 <sup>nd</sup> ~5 <sup>th</sup> Code
Tape and Ammunition Box (T/B)	A	N/A	0	HF	0	serial number
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number
Bulk Packing (B/P)	B	13"	2			
Tube Packing (T/P)	T	26mm	X			
Tape and Reel (Right Oriented) (TRR)	S	52mm	Y			
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U			
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D			