

## 70mA, 70V SMD Schottky Barrier Diode

### FEATURES

- Low turn-on voltage
- Fast switching
- Moisture sensitivity level: level 1, per J-STD-020
- RoHS Compliant
- Halogen-free according to IEC 61249-2-21

### APPLICATIONS

- Adapters
- For switching power supply
- Low stored charge
- Inverter

### MECHANICAL DATA

- Case: SOT-23
- Molding compound: UL flammability classification rating 94V-0
- Terminal: Matte tin plated leads, solderable per J-STD-002
- Meet JESD 201 class 1A whisker test
- Weight: 8 mg (approximately)

KEY PARAMETERS		
PARAMETER	VALUE	UNIT
$I_F$	70	mA
$V_{RRM}$	70	V
$I_{FSM}$	0.1	A
$V_F$ at $I_F=15mA$	1	V
$T_J$ Max.	125	°C
Package	SOT-23	



ABSOLUTE MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)				
PARAMETER		SYMBOL	VALUE	UNIT
Marking code on the device	BAS70		73	
	BAS70-04		74	
	BAS70-05		75	
	BAS70-06		76	
Repetitive peak reverse voltage		$V_{RRM}$	70	V
Working peak reverse voltage		$V_{RWM}$	70	V
DC blocking voltage		$V_R$	70	V
RMS reverse voltage		$V_{R(RMS)}$	49	V
Forward current		$I_F$	70	mA
Non-repetitive peak forward surge current @ $t = 1s$		$I_{FSM}$	100	mA
Power dissipation		$P_D$	200	mW
Junction temperature range		$T_J$	-55 to +125	°C
Storage temperature range		$T_{STG}$	-55 to +150	°C

<b>THERMAL PERFORMANCE</b>			
<b>PARAMETER</b>	<b>SYMBOL</b>	<b>TYP</b>	<b>UNIT</b>
Junction-to-ambient thermal resistance	$R_{\theta JA}$	625	°C/W

<b>ELECTRICAL SPECIFICATIONS</b> ( $T_A = 25^\circ\text{C}$ unless otherwise noted)					
<b>PARAMETER</b>	<b>CONDITIONS</b>	<b>SYMBOL</b>	<b>MIN</b>	<b>MAX</b>	<b>UNIT</b>
Forward voltage per diode <sup>(1)</sup>	$I_F = 1\text{mA}, T_J = 25^\circ\text{C}$	$V_F$	-	0.41	V
	$I_F = 15\text{mA}, T_J = 25^\circ\text{C}$			1.00	
Reverse current per diode <sup>(2)</sup>	$V_R = 50\text{V}, T_J = 25^\circ\text{C}$	$I_R$	-	100	nA
Reverse Breakdown Voltage	$I_R = 10\mu\text{A}$	$V_{(BR)}$	70	-	V
Junction capacitance	$f = 1\text{MHz}, V_R = 0\text{V}$	$C_J$	-	2	pF
Reverse Recovery Time	$I_F = I_R = 10\text{mA}, R_L = 100\Omega,$ $I_{RR} = 1\text{mA}$	$t_{rr}$	-	5	ns

**Notes:**

1. Pulse test with  $PW = 0.3\text{ms}$
2. Pulse test with  $PW = 30\text{ms}$

<b>ORDERING INFORMATION</b>		
<b>ORDERING CODE</b> (Note 1)	<b>PACKAGE</b>	<b>PACKING</b>
BAS7xxxx RF	SOT-23	3K / 7" Reel
BAS7xxxx RFG	SOT-23	3K / 7" Reel
BAS7xxxx-B0 RF	SOT-23	3K / 7" Reel
BAS7xxxx-B0 RFG	SOT-23	3K / 7" Reel
BAS7xxxx-D0 RF	SOT-23	3K / 7" Reel
BAS7xxxx-D0 RFG	SOT-23	3K / 7" Reel


**Note:**

1. "xxxx" defines part no. from "0" to "0-06"


**CHARACTERISTICS CURVES**

( $T_A = 25^\circ\text{C}$  unless otherwise noted)


**Fig. 1 Power Derating Curve**

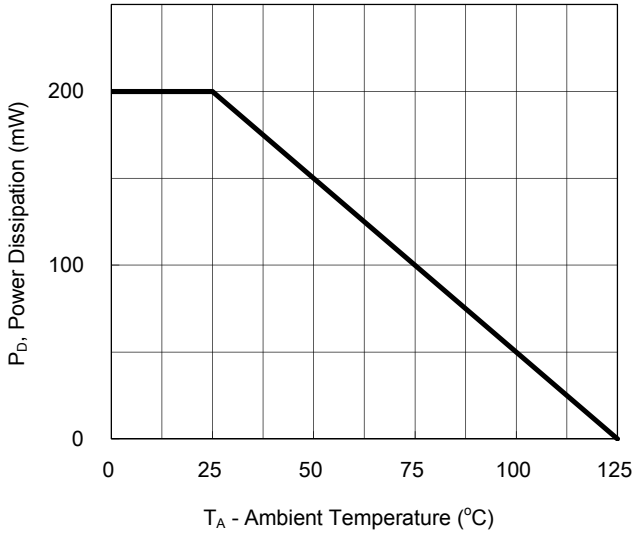


**Fig.2 Maximum Non-Repetitive Peak Forward Surge Current Per Leg**

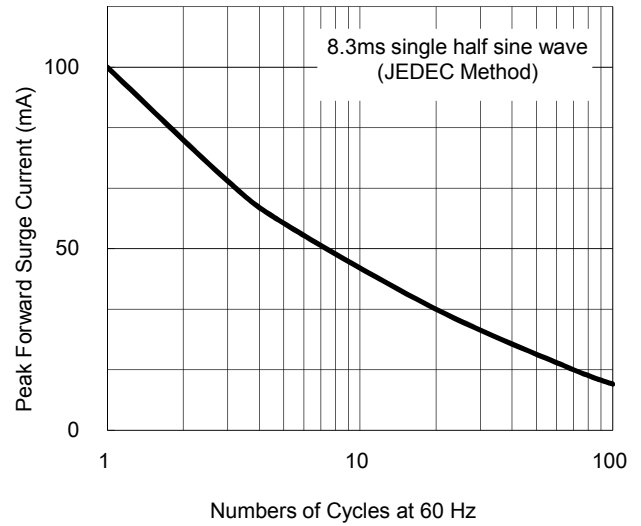

**Fig.3 Typical Forward Characteristics**

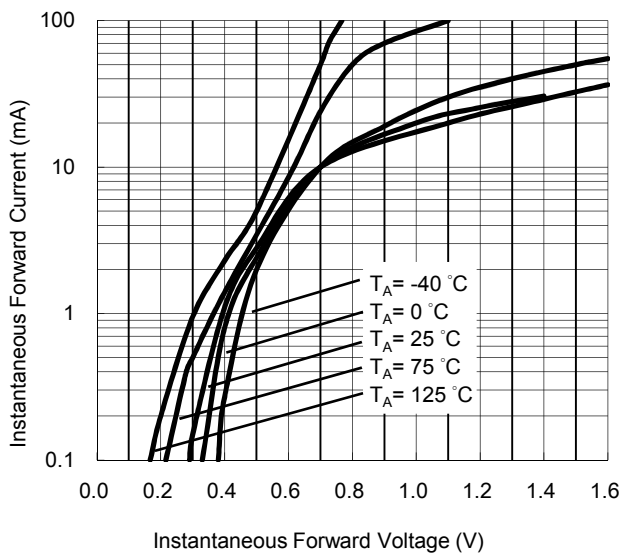


**Fig.4 Typical Reverse Characteristics**

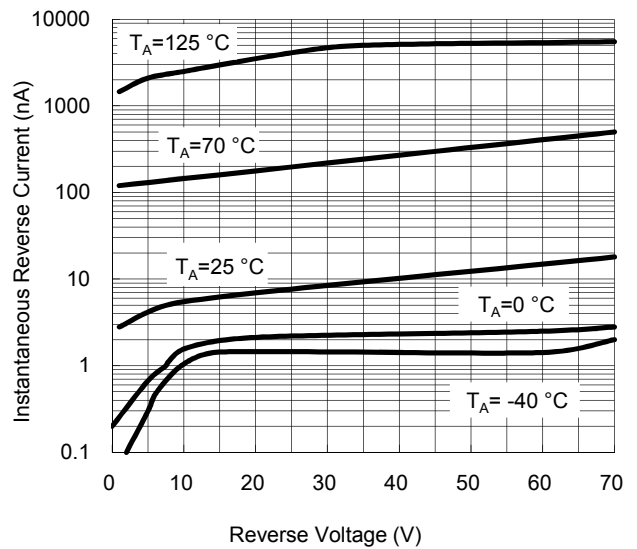


**CHARACTERISTICS CURVES**

(T<sub>A</sub> = 25°C unless otherwise noted)

**Fig. 5 Typical Total Capacitance VS. Reverse Voltage**

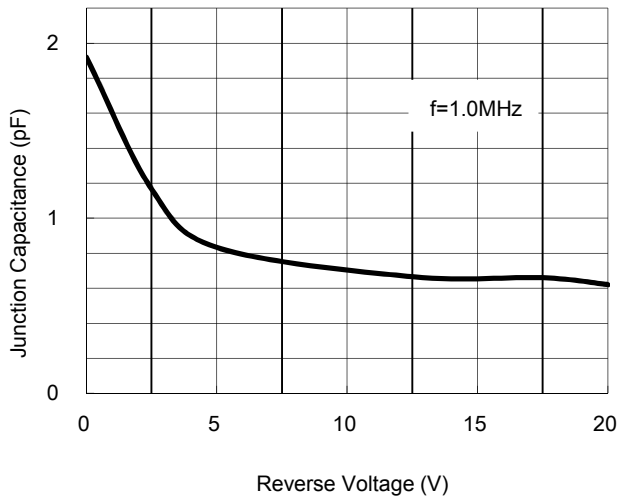


**Fig.6 Typical Transient Thermal Characteristics**

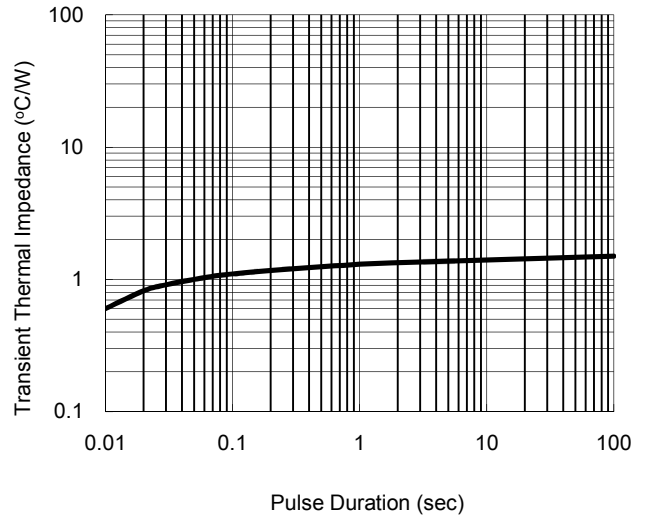


**PACKAGE OUTLINE DIMENSION**

SOT-23

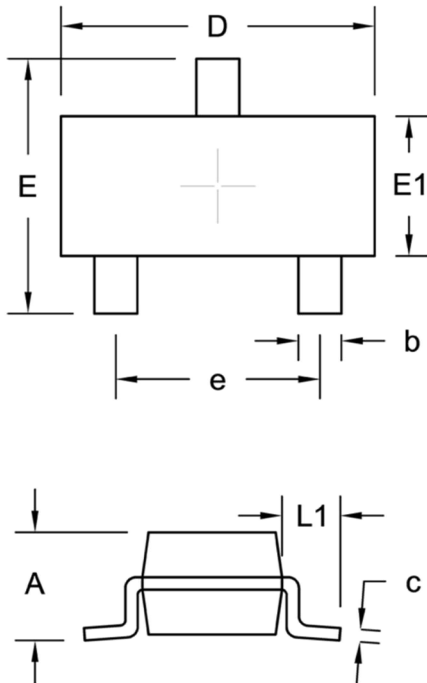

DIM.	Unit (mm)		Unit (inch)	
	Min.	Max.	Min.	Max.
A	0.89	1.12	0.035	0.044
b	0.30	0.50	0.012	0.020
c	0.08	0.20	0.003	0.008
D	2.80	3.04	0.110	0.120
E	2.10	2.64	0.083	0.104
E1	1.20	1.40	0.047	0.055
e	1.90 BSC		0.075 BSC	
L1	0.54 REF.		0.021 REF.	

**SUGGEST PAD LAYOUT**

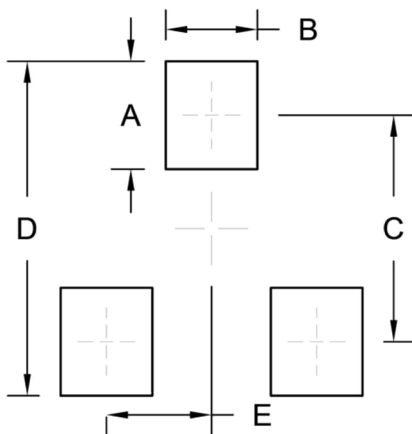

Symbol	Unit (mm)	Unit (inch)
A	1.00	0.039
B	0.85	0.033
C	2.10	0.083
D	3.10	0.122
E	0.98	0.039

**PIN CONFIGURATION**

