



### Silicon Tuning Diode

- High Q hyperabrupt tuning diode
- Very low capacitance spread
- Designed for low tuning voltage operation for VCO's in mobile communications equipment
- For low frequency control elements such as TCXOS and VCXOS
- High capacitance ratio and good C-V linearity
- Pb-free (RoHS compliant) package

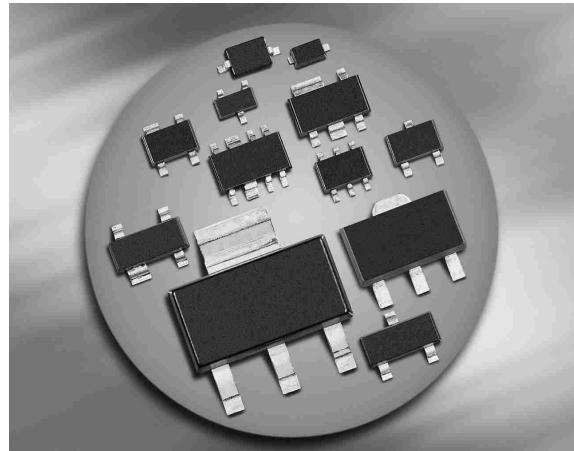

### BBY65-02V



Type	Package	Configuration	$L_S$ (nH)	Marking
BBY65-02V	SC79	single	0.6	F

**Maximum Ratings** at  $T_A = 25^\circ\text{C}$ , unless otherwise specified


Parameter	Symbol	Value	Unit
Diode reverse voltage	$V_R$	15	V
Forward current	$I_F$	50	mA
Operating temperature range	$T_{op}$	-55 ... 150	$^\circ\text{C}$
Storage temperature	$T_{stg}$	-55 ... 150	

**Electrical Characteristics** at  $T_A = 25^\circ\text{C}$ , unless otherwise specified


Parameter	Symbol	Values			Unit
		min.	typ.	max.	
<b>DC Characteristics</b>					
Reverse current $V_R = 10 \text{ V}$	$I_R$	-	-	10	nA
$V_R = 10 \text{ V}, T_A = 85^\circ\text{C}$		-	-	100	
<b>AC Characteristics</b>					
Diode capacitance $V_R = 0.3 \text{ V}, f = 1 \text{ MHz}$	$C_T$	28.2	29.5	30.8	pF
$V_R = 1 \text{ V}, f = 1 \text{ MHz}$		-	20.25	-	
$V_R = 2 \text{ V}, f = 1 \text{ MHz}$		-	9.8	-	
$V_R = 3 \text{ V}, f = 1 \text{ MHz}$		-	4.45	-	
$V_R = 4.7 \text{ V}, f = 1 \text{ MHz}$		2.6	2.7	2.8	
Capacitance ratio $V_R = 0.3 \text{ V}, V_R = 4.7 \text{ V}$	$C_{T0.3}/C_{T4.7}$	10	10.9	-	pF
Capacitance ratio $V_R = 1 \text{ V}, V_R = 3 \text{ V}$	$C_{T1}/C_{T3}$	-	4.55	-	pF
Series resistance $V_R = 1 \text{ V}, f = 470 \text{ MHz}$	$r_S$	-	0.6	0.9	$\Omega$

Diode capacitance  $C_T = f(V_R)$


$f = 1\text{MHz}$

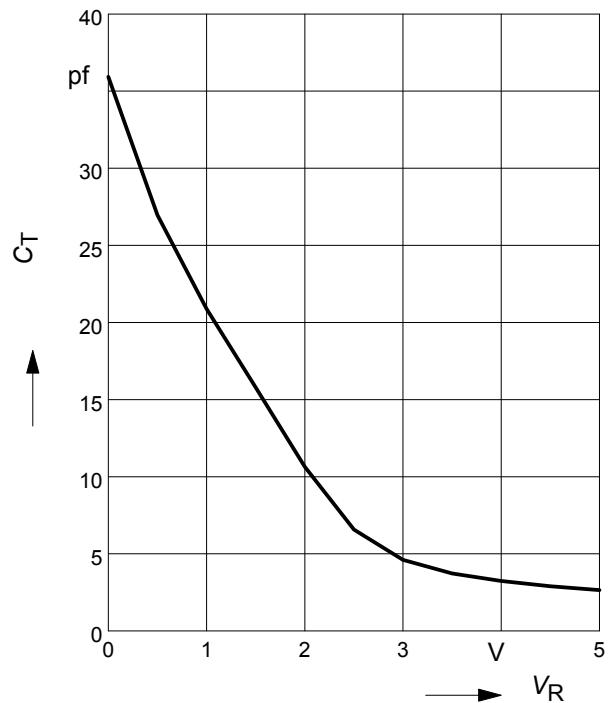


### Package Outline

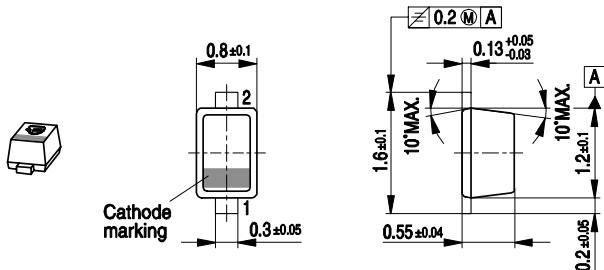

### Foot Print




### Marking Layout (Example)

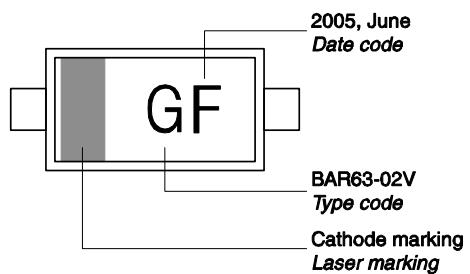

### Standard Packing

Reel ø180 mm = 3.000 Pieces/Reel  
 Reel ø180 mm = 8.000 Pieces/Reel (2 mm Pitch)  
 Reel ø330 mm = 10.000 Pieces/Reel

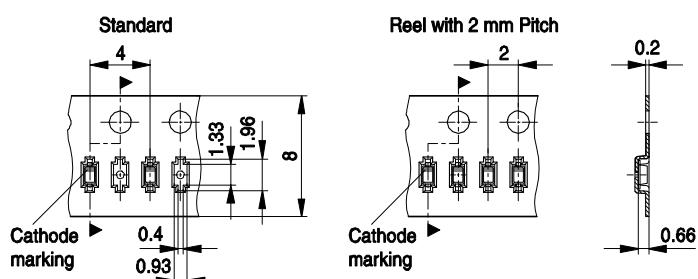

Date Code marking for discrete packages with  
one digit (SCD80, SC79, SC75<sup>1)</sup>) CES-Code

Month	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014
01	a	p	A	P	a	p	A	P	a	p	A	P
02	b	q	B	Q	b	q	B	Q	b	q	B	Q
03	c	r	C	R	c	r	C	R	c	r	C	R
04	d	s	D	S	d	s	D	S	d	s	D	S
05	e	t	E	T	e	t	E	T	e	t	E	T
06	f	u	F	U	f	u	F	U	f	u	F	U
07	g	v	G	V	g	v	G	V	g	v	G	V
08	h	x	H	X	h	x	H	X	h	x	H	X
09	j	y	J	Y	j	y	J	Y	j	y	J	Y
10	k	z	K	Z	k	z	K	Z	k	z	K	Z
11	l	2	L	4	l	2	L	4	l	2	L	4
12	n	3	N	5	n	3	N	5	n	3	N	5

1) New Marking Layout for SC75, implemented at October 2005.