



BC817-16-AU / BC817-25-AU / BC817-40-AU

Silicon NPN General Purpose Transistors


Voltage 45V **Current** 500mA

Features

- Silicon NPN Epitaxial type
- Excellent DC current gain characteristics
- General purpose amplifier application
- AEC-Q101 qualified
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 Standard
- PNP complement: BC807-AU series

Mechanical Data

- Case: SOT-23 Package
- Terminals : Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.0003 ounces, 0.0084grams
- Marking: BC817-16-AU: 8A
BC817-25-AU: 8B
BC817-40-AU: 8C

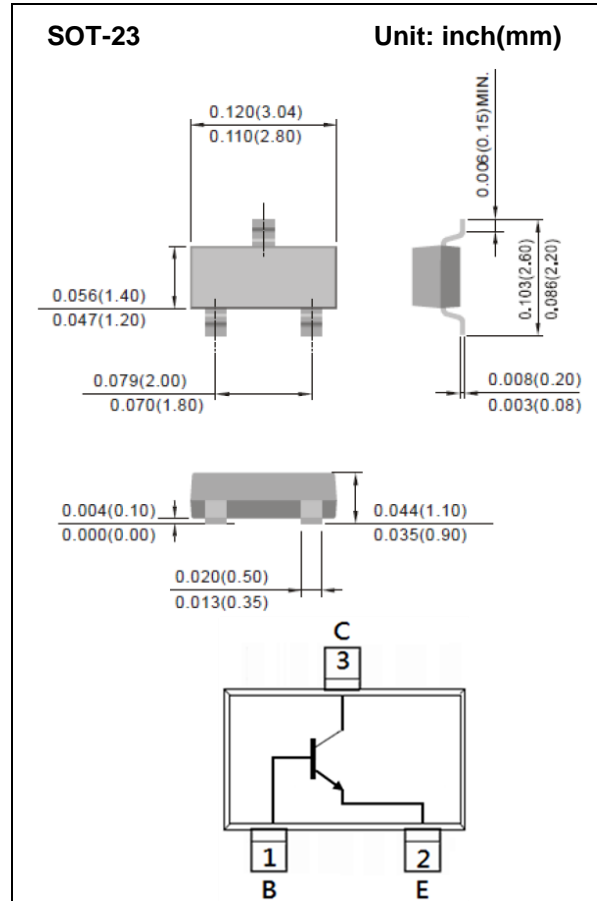

Maximum Ratings and Thermal Characteristics (T_A=25° C unless otherwise noted)

PARAMETER	SYMBOL	LIMIT	UNITS
Collector-Base Voltage	V _{CBO}	50	V
Collector-Emitter Voltage	V _{CEO}	45	V
Emitter-Base Voltage	V _{EBO}	5	V
Collector Current (DC)	I _C	500	mA
Collector Current (Pulse)	I _{CP}	1000	mA
Total Power Dissipation	P _{TOT}	330	mW
Operating Junction and Storage Temperature Range	T _J , T _{STG}	-55~150	°C
Thermal Resistance from Junction to Ambient ^(Note)	R _{θJA}	375	°C/W

Note: Mounted on minimum pad mount on FR-4 board.



BC817-16-AU / BC817-25-AU / BC817-40-AU

Electrical Characteristics ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS	
OFF Characteristics							
Collector-Emitter Breakdown Voltage	BV_{CEO}	$I_C=10\text{mA}, I_B=0\text{A}$	45	-	-	V	
Collector-Base Breakdown Voltage	BV_{CBO}	$I_C=10\mu\text{A}, I_E=0\text{A}$	50	-	-	V	
Emitter-Base Breakdown Voltage	BV_{EBO}	$I_E=1\mu\text{A}, I_C=0\text{A}$	5	-	-	V	
Collector-Base Cutoff Current	I_{CBO}	$V_{CB}=20\text{V}, I_E=0\text{A}$	-	-	100	nA	
Collector-Base Cutoff Current	I_{CBO}	$T_j=125^{\circ}\text{C}$	-	-	5	μA	
Emitter-Base Cutoff Current	I_{EBO}	$V_{EB}=5\text{V}$	-	-	100	nA	
ON characteristics							
DC Current Gain	BC817-16-AU	h_{FE}	$V_{CE}=1\text{V}, I_C=100\text{mA}$	100	-	250	
	BC817-25-AU			160	-	400	
	BC817-40-AU			250	-	600	
DC Current Gain			$V_{CE}=1\text{V}, I_C=500\text{mA}$	40	-	-	
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$		$I_C=500\text{mA}, I_B=50\text{mA}$	-	-	0.7	V
Base-Emitter Turn-on voltage	$V_{BE(on)}$		$I_C=500\text{mA}, V_{CE}=1\text{V}$	-	-	1.2	V
Transition Frequency	f_T		$I_C=10\text{mA}, V_{CE}=5\text{V}$	100	-	-	MHz
Collector Output Capacitance	C_{OB}		$V_{CB}=10\text{V}, f=1\text{MHz}$	-	7	-	pF



BC817-16-AU / BC817-25-AU / BC817-40-AU

TYPICAL CHARACTERISTIC CURVES

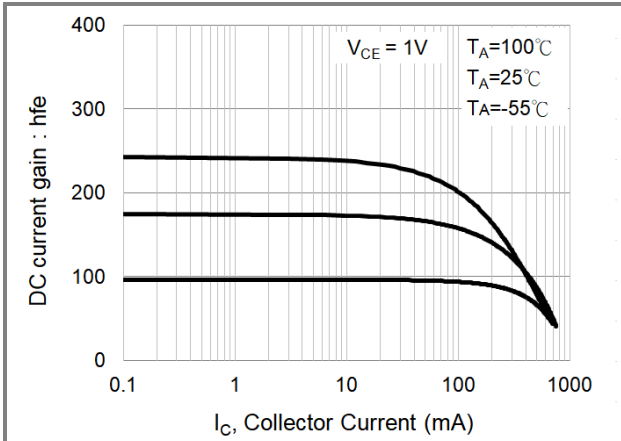


Fig.1 DC Current Gain(-16)

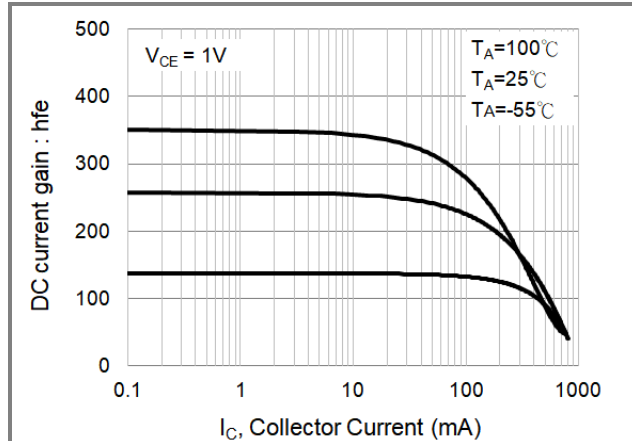


Fig.2 DC Current Gain (-25)

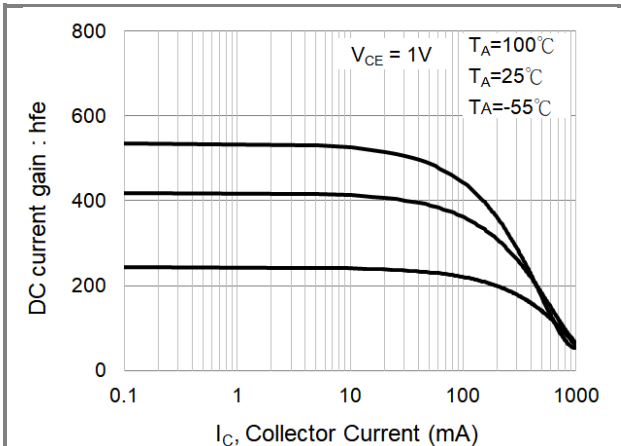


Fig.3 DC Current Gain (-40)

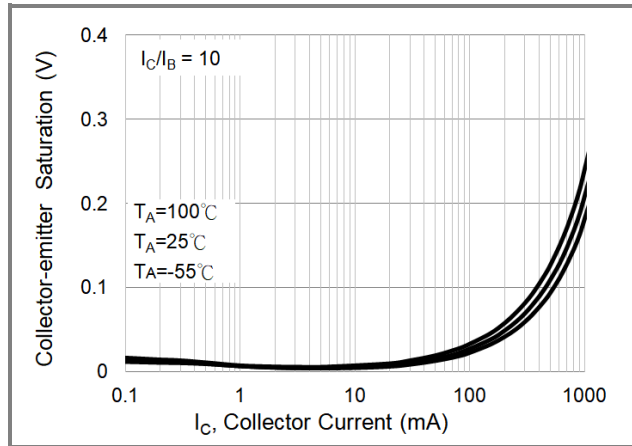


Fig.4 Collector-Emitter Saturation Voltage (-16)

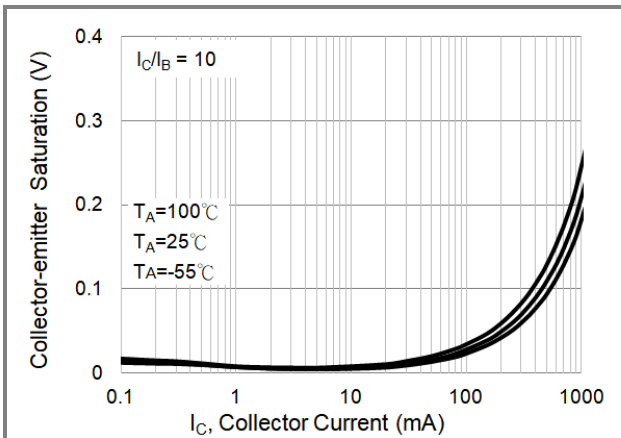


Fig.5 Collector-Emitter Saturation Voltage (-25)

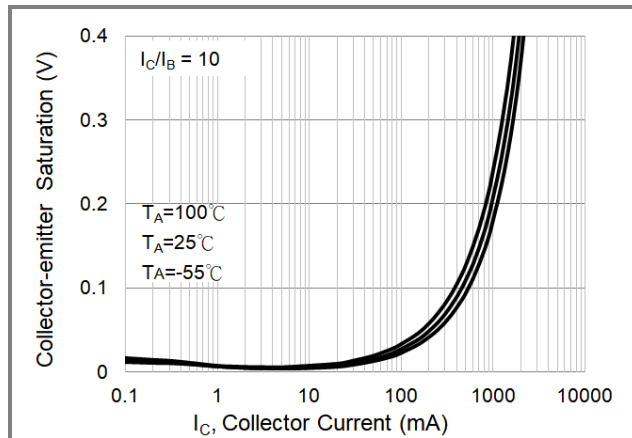


Fig.6 Collector-Emitter Saturation Voltage (-40)



BC817-16-AU / BC817-25-AU / BC817-40-AU

TYPICAL CHARACTERISTIC CURVES

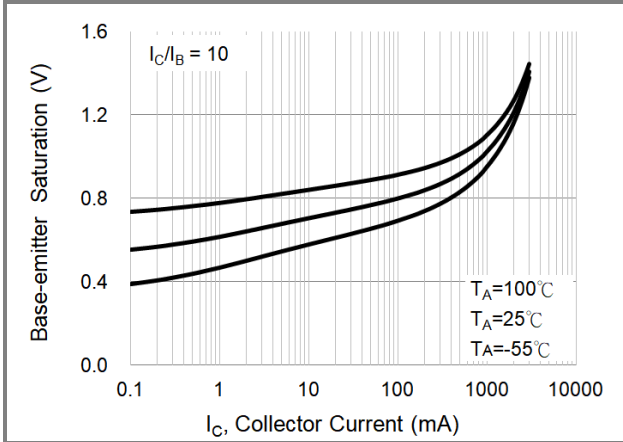


Fig.7 Base-Emitter Saturation Voltage (-16)

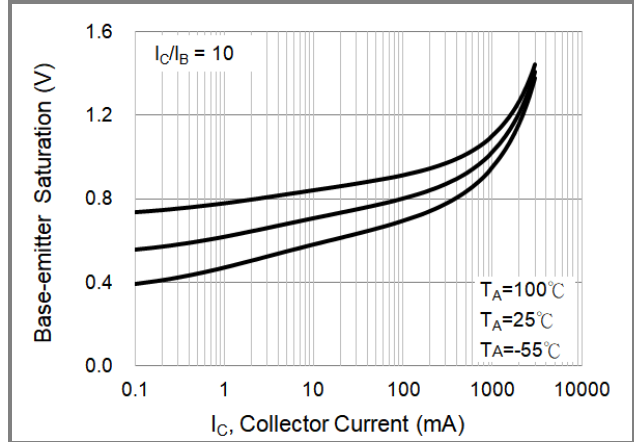


Fig.8 Base-Emitter Saturation Voltage (-25)

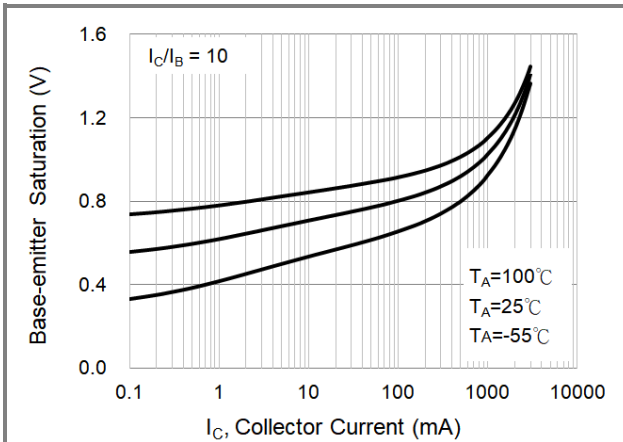


Fig.9 Base-Emitter Saturation Voltage (-40)

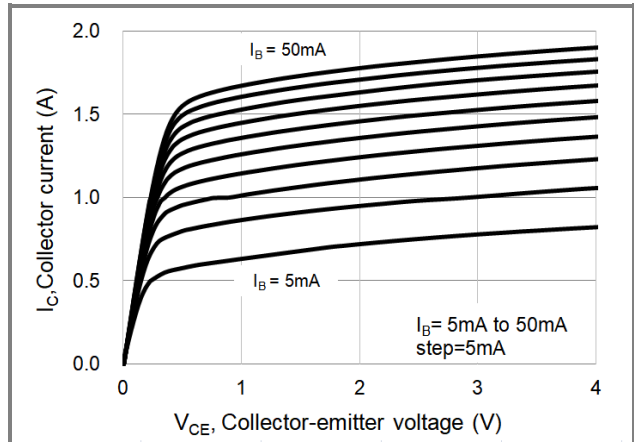


Fig.10 Collector Current (-16)

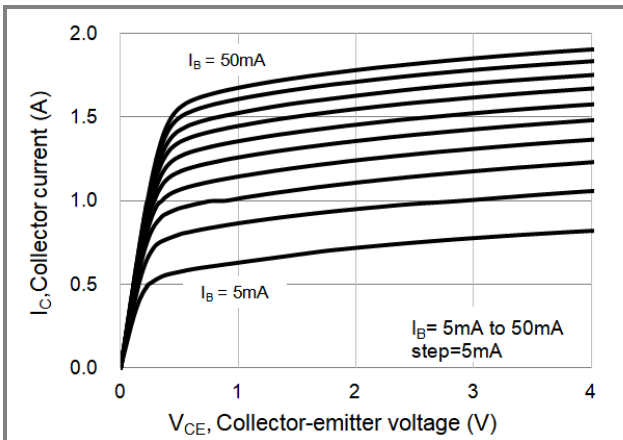


Fig.11 Collector Current (-25)

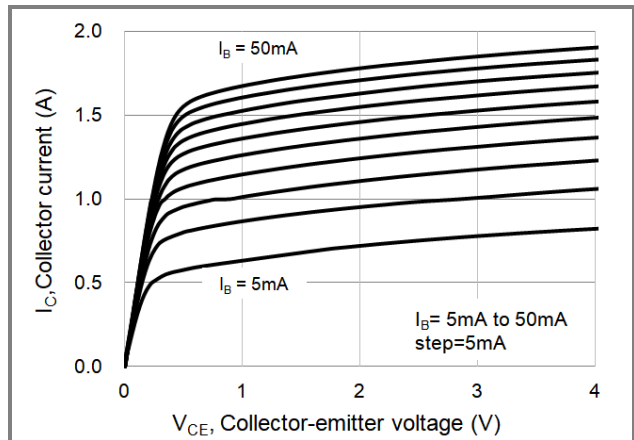


Fig.12 Collector Current (-40)



BC817-16-AU / BC817-25-AU / BC817-40-AU

PART NO PACKING CODE VERSION

Part No Packing Code	Package Type	Packing type	Marking	Version
BC817-16-AU_R1_000A1	SOT-23	3K pcs / 7" reel	8A	Halogen free
BC817-25-AU_R1_000A1	SOT-23	3K pcs / 7" reel	8B	Halogen free
BC817-40-AU_R1_000A1	SOT-23	3K pcs / 7" reel	8C	Halogen free

MOUNTING PAD LAYOUT

