


BC856AW-HF Thru. BC858CW-HF

PNP

RoHS Device

Halogen Free




Features

- Ideally suited for automatic insertion.
- For switching and AF amplifier applications.


Mechanical data

- Case: SOT-323, molded plastic.
- Terminals: Solderable per MIL-STD-750, method 2026.

Circuit diagram



1 B : BASE
2 E : EMITTER
3 C : COLLECTOR

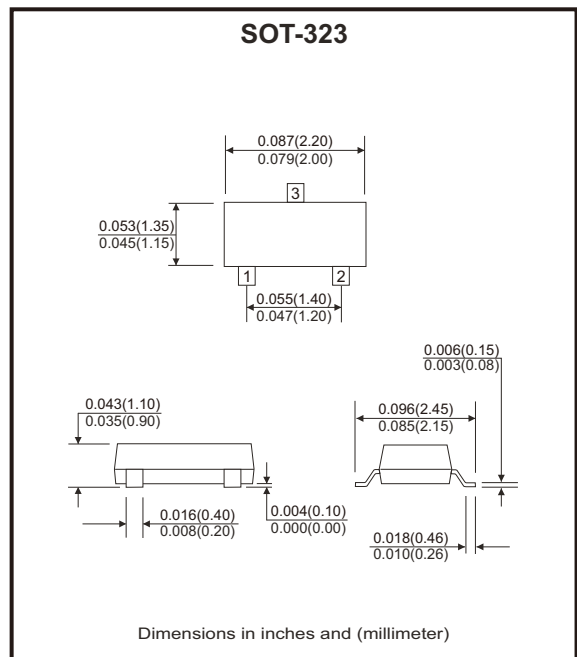

Maximum Ratings (Ta=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Collector-Base voltage	V_{CBO}	-80 -50 -30	V
Collector-Emitter voltage	V_{CEO}	-65 -45 -30	V
Emitter-Base voltage	V_{EBO}	-5	V
Collector current-continuous	I_C	-0.1	A
Collector power dissipation	P_C	150	mW
Thermal resistance from junction to ambient	$R_{\theta JA}$	833	°C/W
Junction temperature	T_J	150	°C
Storage temperature range	T_{STG}	-65 to +150	°C

Electrical Characteristics (Ta= 25°C unless otherwise specified)

Parameter	Symbol	Test Conditions	Min.	Max.	Unit
Collector-Base breakdown voltage BC856W-HF BC857W-HF BC858W-HF	V _{CBO}	I _C =-10μA, I _E =0	-80 -50 -30		V
Collector-Emitter breakdown voltage BC856W-HF BC857W-HF BC858W-HF	V _{CEO}	I _C =-10mA, I _B =0	-65 -45 -30		V
Emitter-Base breakdown voltage	V _{EBO}	I _E =-1μA, I _C =0	-5		V
Collector cut-off current	I _{CBO}	V _{CB} =-30V, I _E =0		-15	nA
DC current gain BC856AW, BC857AW, BC858AW BC856BW, BC857BW, BC858BW BC857CW, BC858CW	h _{FE}	V _{CE} =-5V, I _C =-2mA	125 220 420	250 475 800	
Collector-Emitter saturation voltage	V _{CE(sat)}	I _C =-100mA, I _B =-5mA		-0.65	V
Base-Emitter saturation voltage	V _{BE(sat)}	I _C =-100mA, I _B =-5mA		-1.1	V
Transition frequency	f _T	V _{CE} =-5V, I _C =-10mA, f=100MHz	100		MHz
Collector capacitance	C _{ob}	V _{CB} =-10V, f=1MHz		4.5	pF

Electrical Characteristic Curves (BC856AW-HF Thru. BC858CW-HF)

Fig.1 - Static Characteristic

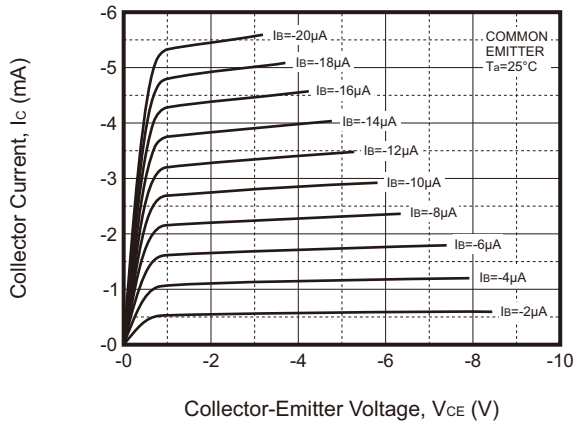


Fig.2 - hFE — Ic

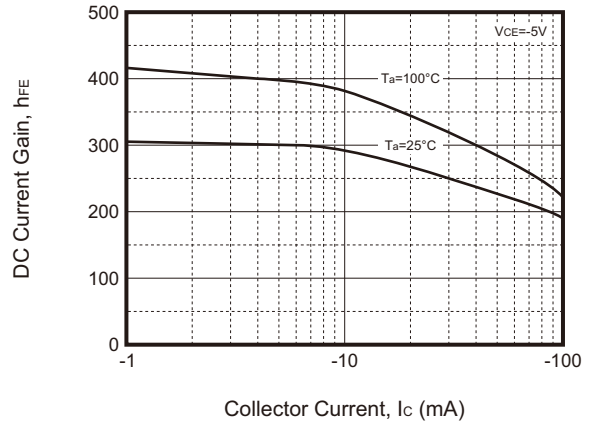


Fig.3 - VBEsat — Ic

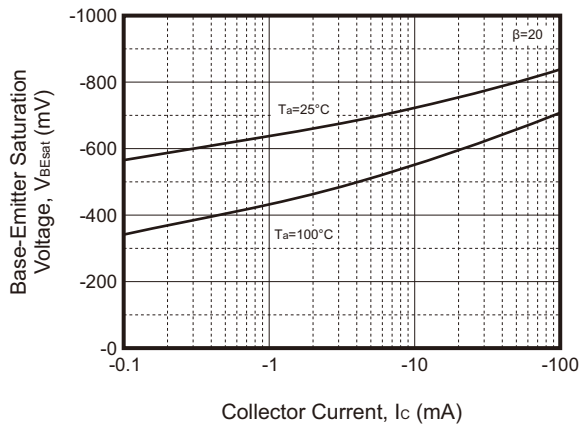


Fig.4 - VCEsat — Ic

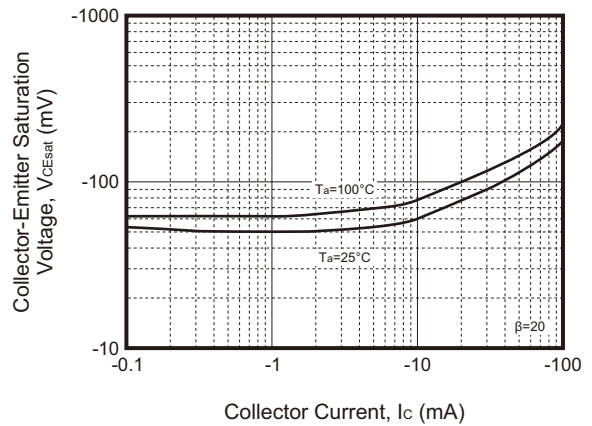


Fig.5 - Cob / C_{ib} — VCB / VEB






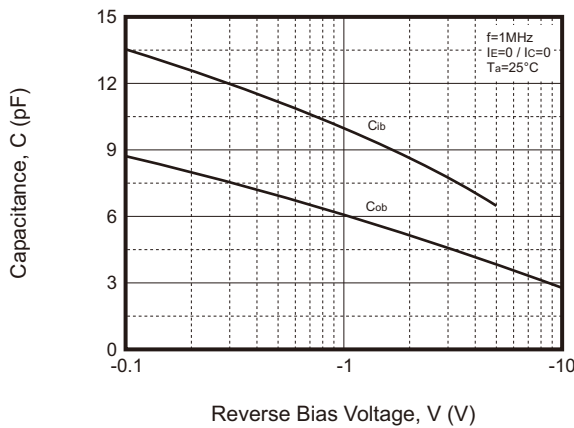


Fig.6 - Pc — Ta

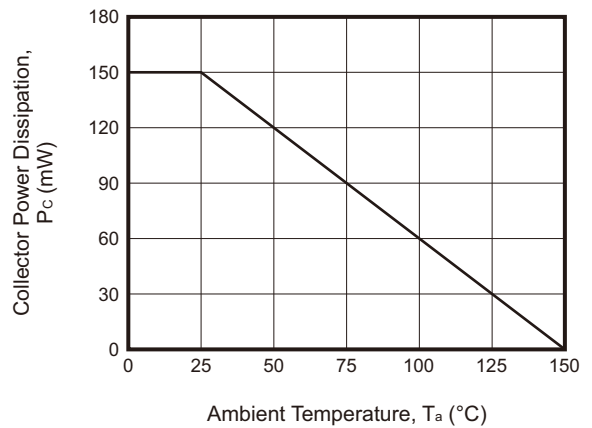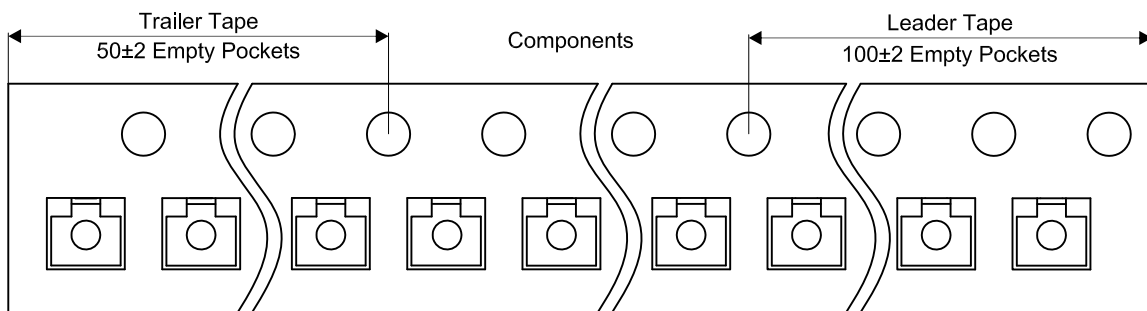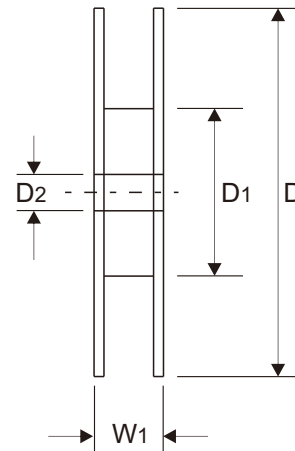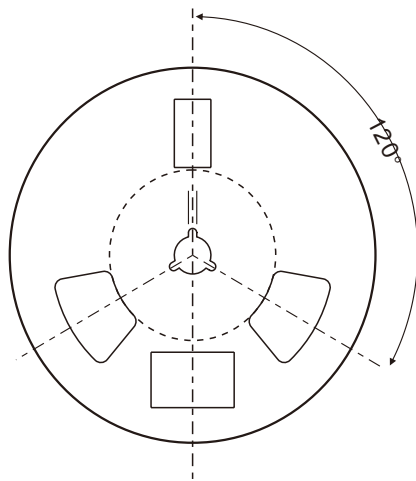

Reel Taping Specification

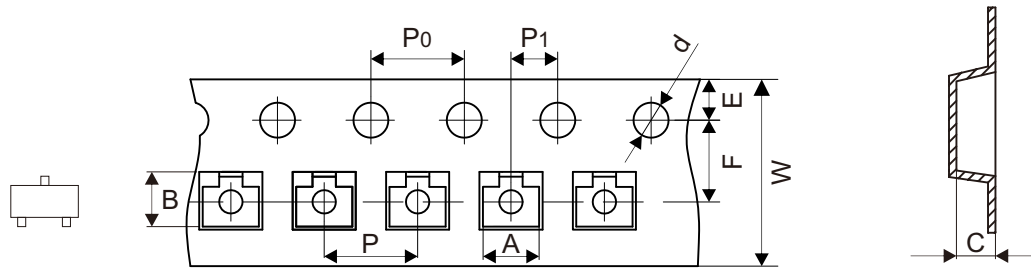

SOT-323	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	2.25 ± 0.05	2.55 ± 0.05	1.19 ± 0.05	1.55 ± 0.10	178.00 ± 2.00	54.40 ± 1.00	13.00 ± 1.00
	(inch)	0.089 ± 0.002	0.100 ± 0.002	0.047 ± 0.002	0.061 ± 0.004	7.008 ± 0.079	2.142 ± 0.039	0.512 ± 0.039

SOT-323	SYMBOL	E	F	P	P0	P1	W	W1
	(mm)	1.75 ± 0.10	3.50 ± 0.10	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.10	8.00 +0.30 -0.10	12.30 ± 1.00
	(inch)	0.069 ± 0.004	0.138 ± 0.004	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.004	0.315 +0.012 -0.004	0.484 ± 0.039