

Features

- Complementary Types: BCP53 (PNP)
- Halogen Free. "Green" Device (Note 1)
- Moisture Sensitivity Level 1
- Epoxy Meets UL 94 V-0 Flammability Rating
- Lead Free Finish/RoHS Compliant ("P" Suffix Designates RoHS Compliant. See Ordering Information)


Maximum Ratings @ 25°C Unless Otherwise Specified

- Operating Junction Temperature Range: -55°C to +150°C
- Storage Temperature Range: -55°C to +150°C
- Thermal Resistance: 83.3°C/W Junction to Ambient

| Parameter | Symbol | Rating | Unit |
|---------------------------|-----------|--------|------|
| Collector-Base Voltage | V_{CBO} | 100 | V |
| Collector-Emitter Voltage | V_{CEO} | 80 | V |
| Emitter-Base Voltage | V_{EBO} | 5 | V |
| Collector Current | I_C | 1 | A |
| Power Dissipation | P_D | 1.5 | W |


Note: 1. Halogen free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.

Internal Structure

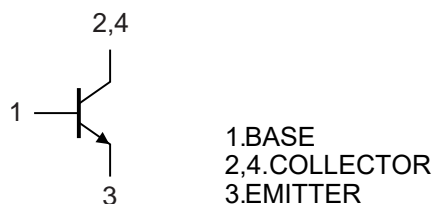


NPN Plastic-Encapsulate Transistors

SOT-223

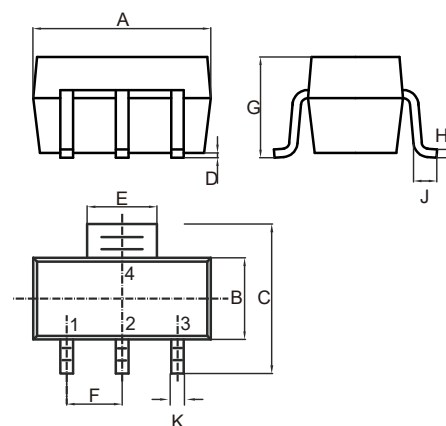

| DIM | DIMENSIONS | | | | NOTE |
|-----|------------|-------|------|------|------|
| | INCHES | | MM | | |
| | MIN | MAX | MIN | MAX | |
| A | 0.248 | 0.264 | 6.30 | 6.70 | |
| B | 0.130 | 0.146 | 3.30 | 3.70 | |
| C | 0.264 | 0.287 | 6.70 | 7.30 | |
| D | 0.001 | 0.004 | 0.02 | 0.10 | |
| E | 0.114 | 0.122 | 2.90 | 3.10 | |
| F | 0.091 | | 2.30 | | TYP. |
| G | --- | 0.071 | --- | 1.80 | |
| H | 0.009 | 0.014 | 0.23 | 0.35 | |
| J | 0.030 | --- | 0.75 | --- | |
| K | 0.026 | 0.033 | 0.66 | 0.84 | |

Suggested Solder Pad Layout

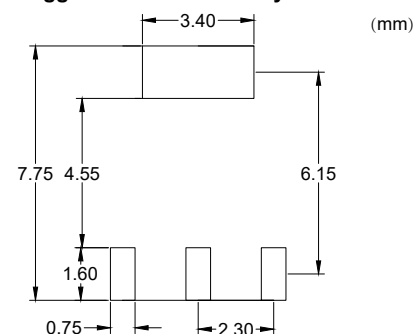

Electrical Characteristics @ $T_A=25^\circ\text{C}$ Unless Otherwise Specified

| Parameter | Symbol | Min | Typ | Max | Units | Conditions |
|--------------------------------------|---------------|-----|-----|-----|-------|---|
| Collector-Base Breakdown Voltage | $V_{(BR)CBO}$ | 100 | | | V | $I_C=100\mu\text{A}, I_E=0$ |
| Collector-Emitter Breakdown Voltage | $V_{(BR)CEO}$ | 80 | | | V | $I_C=10\text{mA}, I_B=0$ |
| Emitter-Base Breakdown Voltage | $V_{(BR)EBO}$ | 5 | | | V | $I_E=10\mu\text{A}, I_C=0$ |
| Collector-Base Cutoff Current | I_{CBO} | | | 100 | nA | $V_{CB}=30\text{V}, I_E=0$ |
| DC Current Gain | h_{FE1} | 25 | | | | $V_{CE}=2\text{V}, I_C=5\text{mA}$ |
| | h_{FE2} | 63 | | 250 | | $V_{CE}=2\text{V}, I_C=150\text{mA}$ |
| | h_{FE3} | 25 | | | | $V_{CE}=2\text{V}, I_C=500\text{mA}$ |
| Collector-Emitter Saturation Voltage | $V_{CE(sat)}$ | | | 0.5 | V | $I_C=500\text{mA}, I_B=50\text{mA}$ |
| Base-Emitter Voltage | V_{BE} | | | 1 | V | $V_{CE}=2\text{V}, I_C=500\text{mA}$ |
| Transition Frequency | f_T | 100 | | | MHz | $V_{CE}=10\text{V}, I_C=50\text{mA}, f=100\text{MHz}$ |

Classification of $h_{FE(2)}$

| | | |
|-------|----------|----------|
| Rank | BCP56-10 | BCP56-16 |
| Range | 63~160 | 100~250 |

Curve Characteristics

Fig. 1 - Static Characteristics

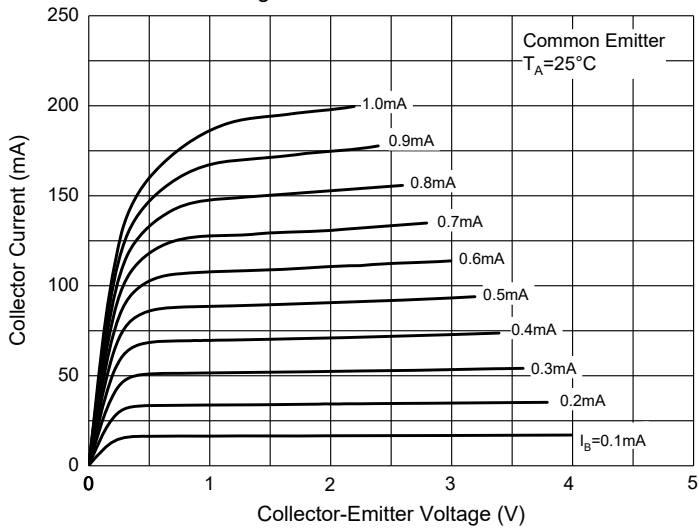


Fig. 2 - DC Current Gain Characteristics

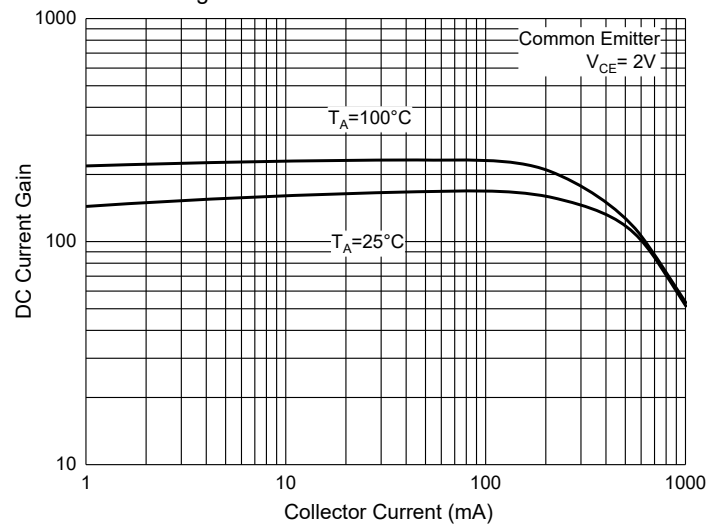


Fig. 3 - Collector-Emitter Saturation Voltage Characteristics

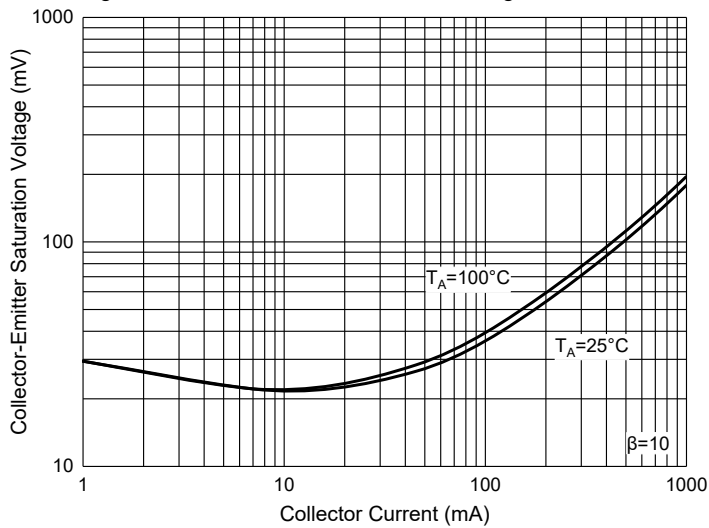


Fig. 4 - Base-Emitter Saturation Voltage Characteristics

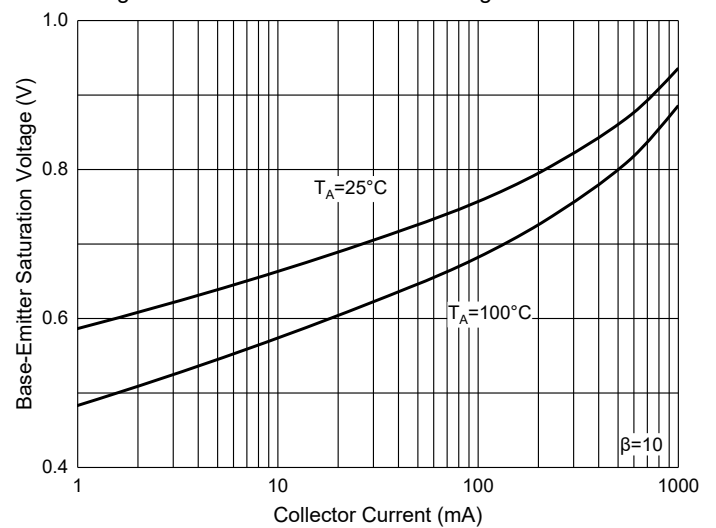


Fig. 5 - Base-Emitter Voltage Characteristics

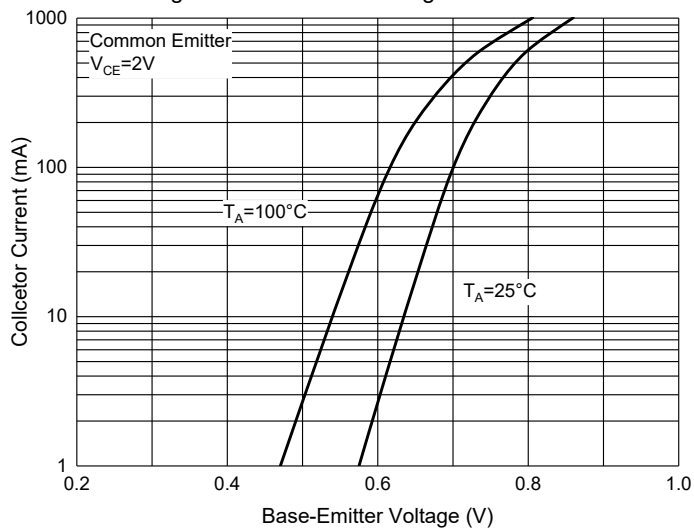


Fig. 6 - Power Derating Curve

