

BCR3AS-14B

700V - 3A - Triac

Low Power Use


R07DS1440EJ0200
(Previous: REJ03G1807-0100)
Rev.2.00
May. 10, 2019

Features

- $I_T(\text{RMS}) : 3 \text{ A}$
- $V_{\text{DRM}} : 800 \text{ V} (\text{T}_j = 125 \text{ }^{\circ}\text{C})$
- $I_{\text{FGTI}}, I_{\text{RGTI}}, I_{\text{RGTH}} : 30 \text{ mA}$
- $\text{T}_j : 150 \text{ }^{\circ}\text{C}$
- Planar Passivation Type

Outline

RENESAS Package code: PRSS0004ZG-A
(Package name: MP-3A)



1. T_1 Terminal
2. T_2 Terminal
3. Gate Terminal
4. T_2 Terminal

Application

Small motor control, heater control, and other general purpose AC control applications.

Maximum Ratings

| Parameter | Symbol | Voltage class | Unit | Conditions |
|--------------------------------------------------------|------------------|---------------|------|----------------------------------|
| | | | | |
| Repetitive peak off-state voltage ^{Note1} | V_{DRM} | 800 | V | $\text{T}_j=125^{\circ}\text{C}$ |
| | | 700 | V | $\text{T}_j=150^{\circ}\text{C}$ |
| Non-repetitive peak off-state voltage ^{Note1} | V_{DSM} | 840 | V | |

Notes: 1. Gate open.

| Parameter | Symbol | Ratings | Unit | Conditions |
|--------------------------------|--------------------|-------------|----------------------|----------------------------------------------------------------------------------------------------------------|
| RMS on-state current | $I_T(\text{RMS})$ | 3 | A | Commercial frequency, sine full wave 360° conduction, $T_c = 133^{\circ}\text{C}$ ^{Note3} |
| Surge on-state current | I_{TSM} | 30 | A | 60 Hz sinewave 1 full cycle, peak value, non-repetitive |
| I^2t for fusing | I^2t | 3.7 | A^2s | Value corresponding to 1 cycle of half wave 60 Hz, surge on-state current |
| Peak gate power dissipation | P_{GM} | 3 | W | |
| Average gate power dissipation | $P_{\text{G(AV)}}$ | 0.3 | W | |
| Peak gate voltage | V_{GM} | 6 | V | |
| Peak gate current | I_{GM} | 0.5 | A | |
| Junction Temperature | T_j | -40 to +150 | $^{\circ}\text{C}$ | |
| Storage temperature | T_{stg} | -40 to +150 | $^{\circ}\text{C}$ | |


Electrical Characteristics

| Parameter | | Symbol | Min. | Typ. | Max. | Unit | Test conditions |
|-------------------------------------------------------------------------|-----|-----------------------|------|------|------|------|-------------------------------------------------------------------------------------------|
| Repetitive peak off-state current | | I _{DRM} | — | — | 2.0 | mA | T _j = 150°C, V _{DRM} applied |
| On-state voltage | | V _{TM} | — | — | 1.6 | V | T _c = 25°C, I _{TM} = 4.5 A, instantaneous measurement |
| Gate trigger voltage ^{Note2} | I | V _{FGTI} | — | — | 1.5 | V | T _j = 25°C, V _D = 6 V, R _L = 6 Ω, R _G = 330 Ω |
| | II | V _{RGTI} | — | — | 1.5 | V | |
| | III | V _{RGTIII} | — | — | 1.5 | V | |
| Gate trigger current ^{Note2} | I | I _{FGTI} | — | — | 30 | mA | T _j = 25°C, V _D = 6 V, R _L = 6 Ω, R _G = 330 Ω |
| | II | I _{RGTI} | — | — | 30 | mA | |
| | III | I _{RGTIII} | — | — | 30 | mA | |
| Gate non-trigger voltage | | V _{GD} | 0.2 | — | — | V | T _j = 125°C, V _D = 1/2 V _{DRM} |
| | | | 0.1 | — | — | | T _j = 150°C, V _D = 1/2 V _{DRM} |
| Thermal resistance | | R _{th (j-c)} | — | — | 3.8 | °C/W | Junction to case ^{Note3} |
| Critical-rate of rise of off-state commutating voltage ^{Note4} | | (dV/dt) _C | 5 | — | — | V/μs | T _j = 125°C |
| | | | 1 | — | — | | T _j = 150°C |







Notes: 2. Measurement using the gate trigger characteristics measurement circuit.

3. Case temperature is measured on the T₂ tab.


4. Test conditions of the critical-rate of rise of off-state commutating voltage is shown in the table below.
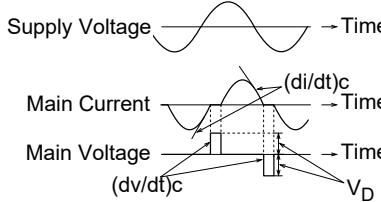
| Test conditions | Commutating voltage and current waveforms (inductive load) |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 1. Junction temperature T _j = 125°C/150°C 2. Rate of decay of on-state commutating current (di/dt) _C = - 1.5 A/ms 3. Peak off-state voltage V _D = 400 V |  |


Performance Curves

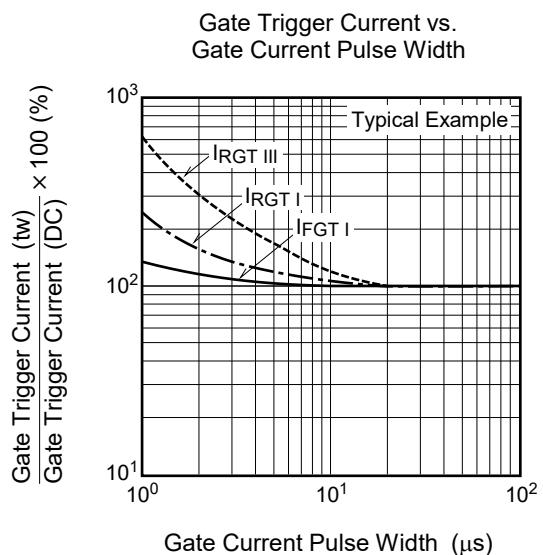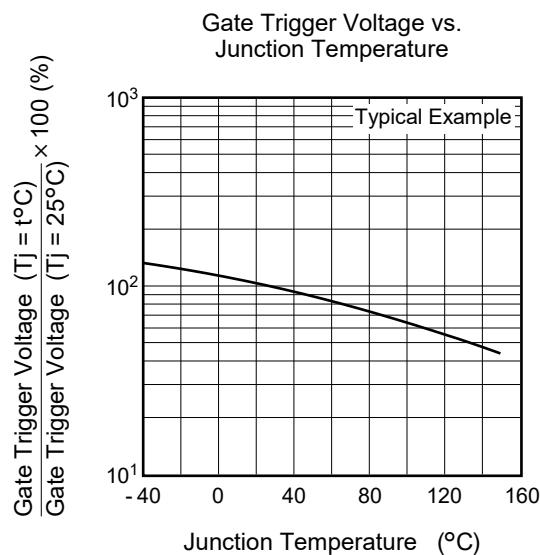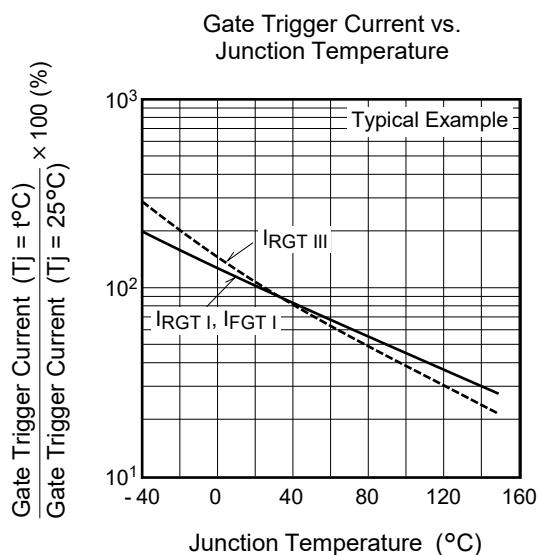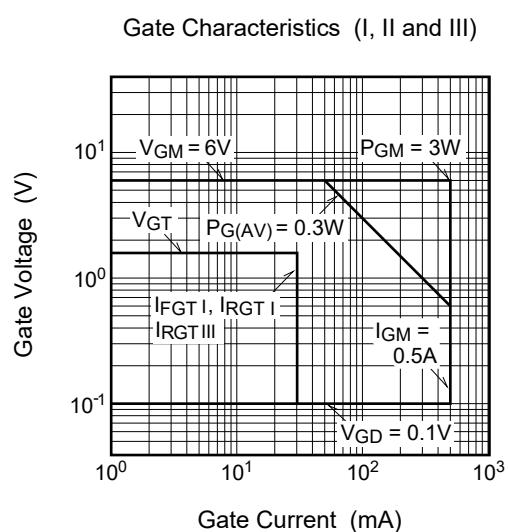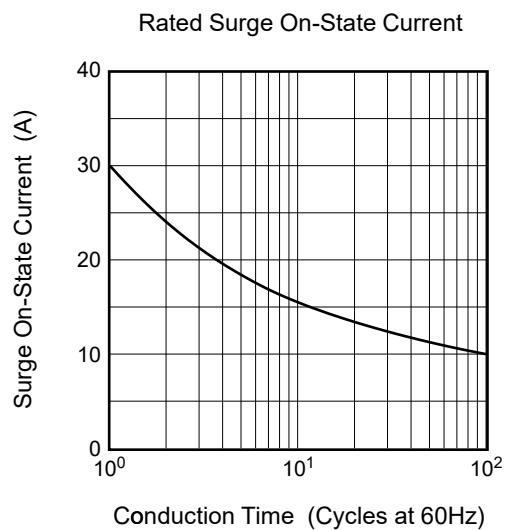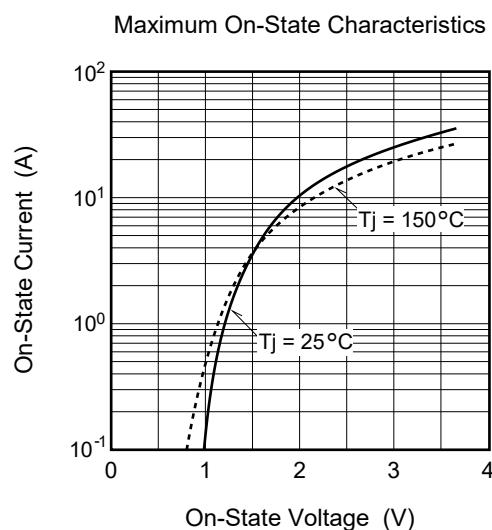


Maximum Transient Thermal Impedance Characteristics (Junction to case)

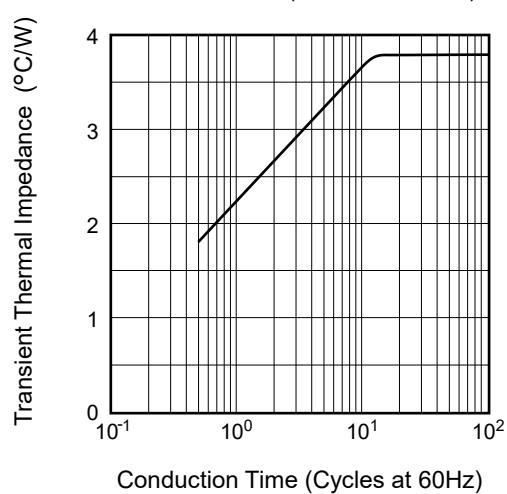


Maximum On-State Power Dissipation

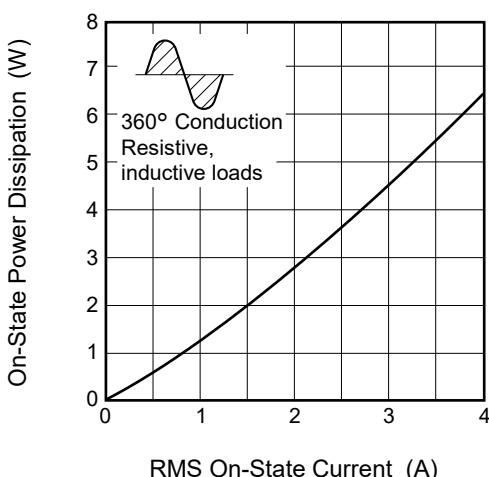


Allowable Case Temperature vs. RMS On-State Current

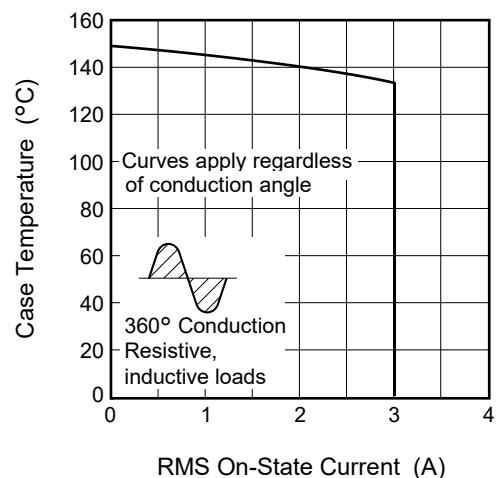


Allowable Ambient Temperature vs. RMS On-State Current






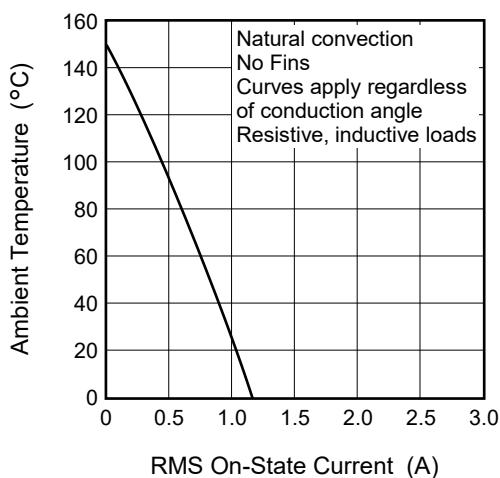


Breakover Voltage vs. Junction Temperature

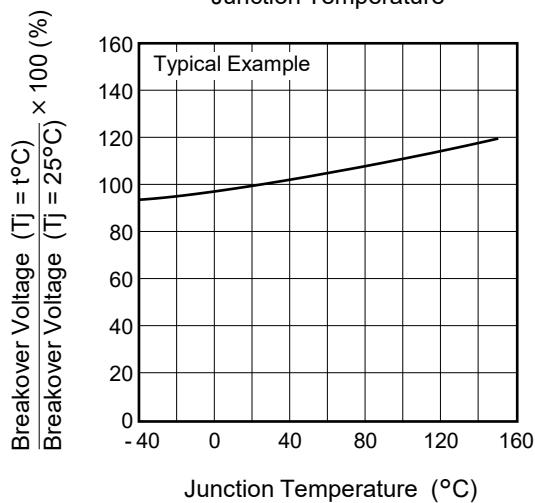


Repetitive Peak Off-State Current vs. Junction Temperature

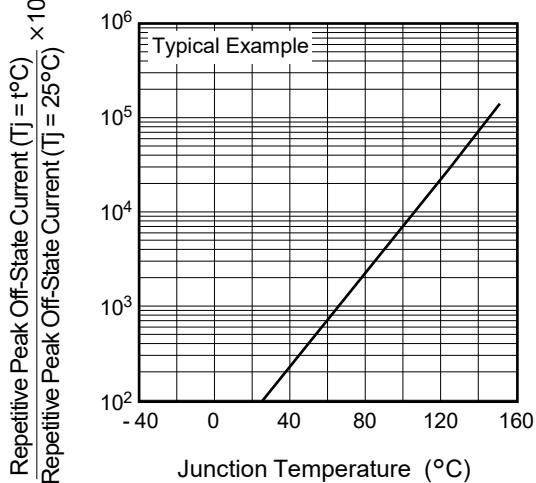


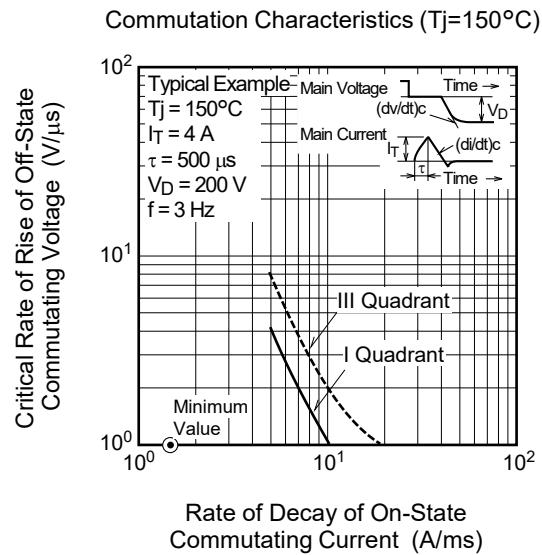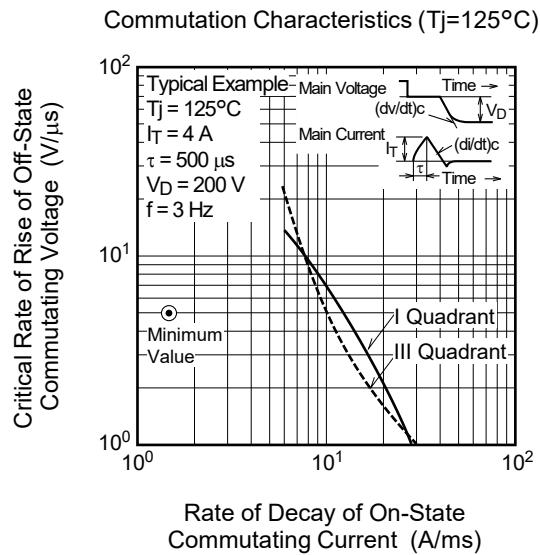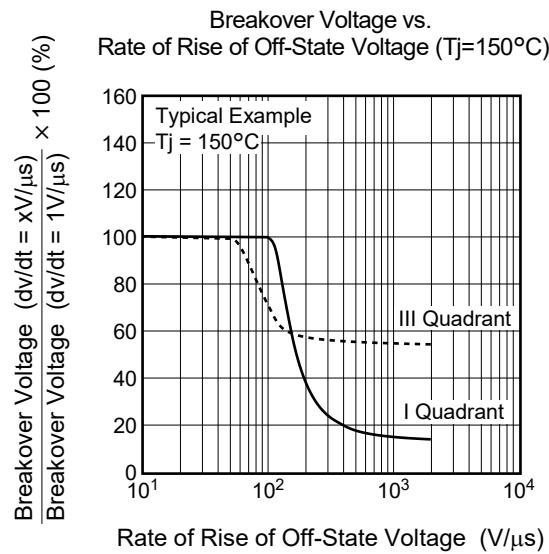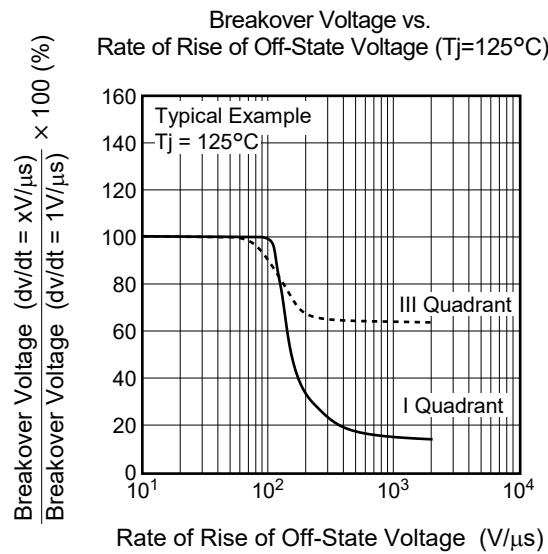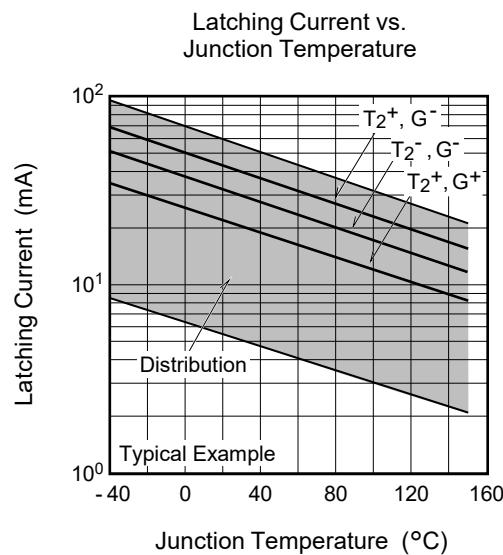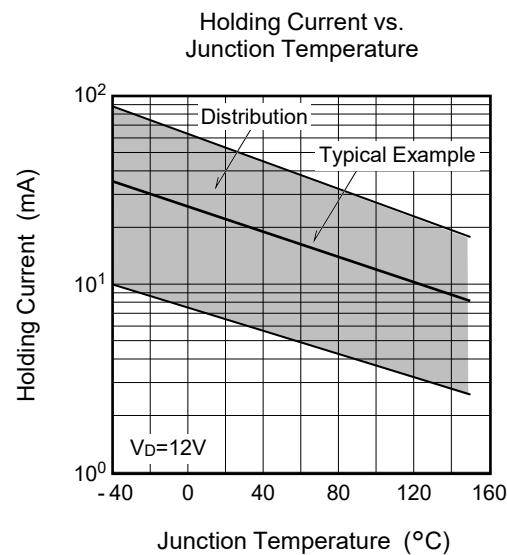


Gate Trigger Characteristics Test Circuits

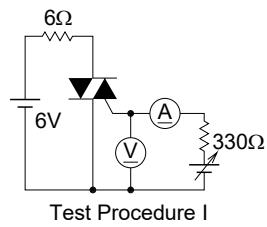

Test Procedure I

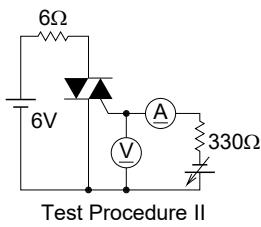


Test Procedure II

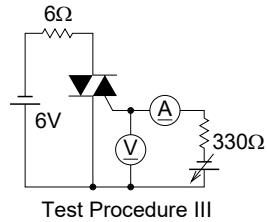

Test Procedure III

Recommended peripheral components for Triac

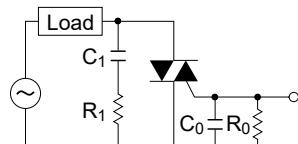

$C_1 = 0.1 \text{ to } 0.47 \mu\text{F}$ $C_0 = 0.1 \mu\text{F}$
 $R_1 = 47 \text{ to } 100\Omega$ $R_0 = 100\Omega$

Package Dimensions

Package Name: MP-3A

| Package Name | JEITA Package Code | RENESAS Code | Previous Code | MASS[Typ.] | Unit: mm |
|--------------|--------------------|--------------|---------------|------------|----------|
| MP-3A | SC-63 | PRSS0004ZG-A | TMP3 | 0.32 g | |

The technical drawing illustrates the physical dimensions of the MP-3A package. Key dimensions include:

- Top View:** Total width is 6.6 mm, with a lead spacing of 5.3 ± 0.2 mm. The height is 10.4 Max mm, with a minimum of 2.5 Min mm. The thickness of the package body is 6.1 ± 0.2 mm.
- Side View:** The total height is 10.4 Max mm, with a minimum of 2.5 Min mm. The lead thickness is 0.76 ± 0.2 mm. The lead pitch is 2.3 ± 0.2 mm. The lead width is 0.76 mm. The lead height is 2.3 mm. The lead thickness is 0.76 mm. The lead height is 2.3 mm.
- Bottom View:** The lead thickness is 0.76 ± 0.2 mm. The lead pitch is 2.3 ± 0.2 mm. The lead height is 2.3 mm.

Ordering Information

| Orderable Part Number | Package | Packing ^{Note5} | Quantity | Remark |
|-----------------------|---------|--------------------------|-----------|----------------------------------|
| BCR3AS-14B-T13#B00 | MP-3A | Embossed tape | 3000 pcs. | |
| BCR3AS-14B#B00 | MP-3A | Tube | 75 pcs. | Tube packing is to be abolished. |

Note: 5. Please confirm the specification about the shipping in detail.