

Ceramic Bandpass Filter

BFCG-252+

50Ω 2400 to 2500 MHz

The Big Deal

- Rugged, ceramic construction
- Tiny size, 0.079" x 0.049" x 0.037" (0805)
- Good power handling



CASE STYLE: GE0805C-3

Product Overview

Mini-Circuits' BFCG-252+ is a LTCC band pass filter with a passband from 2400 to 2500 MHz, supporting a variety of applications. This model provides 1.7 dB typical passband insertion loss and provides a very good stopband rejection due to strategically constructed layout with minimal interaction between components. It provides a wide operating temperature range from -55 to +125°C. Housed in a tiny 0805 ceramic form factor with wrap-around terminations, the filter is ideal for dense PCB layouts and with minimal performance variation due to parasitics.

Key Features

| Feature | Advantages |
|------------------------------------|---|
| Ultra-wide stopband | The LTCC band pass filter provides a very good stopband rejection suitable for high end applications. |
| LTCC Construction | Provides repeatable performance in a rugged, ceramic package well suited for tough environments such as high humidity and temperature extremes. |
| Tiny size (0.079 x 0.049 x 0.037") | Saves space in dense circuit board layouts and minimizes the effects of parasitics. |
| Good power handling | Supports a wide range of system power requirements. |
| Wrap-around terminations | Provides excellent solderability and easy visual inspection |

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Ceramic Bandpass Filter

50Ω 2400 to 2500 MHz

BFCG-252+



Generic photo used for illustration purposes only

CASE STYLE: GE0805C-3

Features

- Miniature size 0805 (0.079"[2.0mm] x 0.049"[1.25mm] x 0.037"[0.95mm])
- High rejection
- Low cost
- Aqueous washable


+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Applications

- ISM Band
- WLAN
- Bluetooth
- Zigbee

Functional Schematic



Electrical Specifications^{1,2} at 25°C

| Parameter | F# | Frequency (MHz) | Min. | Typ. | Max. | Unit | |
|------------------|------------------|-----------------|-------------|------|------|------|----|
| Pass Band | Center Frequency | — | — | 2450 | — | dB | |
| | Insertion Loss | F1-F2 | 2400 - 2500 | — | 1.7 | 3.5 | dB |
| | Return Loss | F1-F2 | 2400 - 2500 | — | 10 | — | dB |
| Stop Band, Lower | Insertion Loss | DC-F3 | 10 - 1350 | 25 | 35 | — | dB |
| | | F4-F5 | 3400 - 3800 | 23 | 27 | — | dB |
| Stop Band, Upper | Insertion Loss | F5-F6 | 3800 - 7000 | 30 | 36 | — | dB |
| | | F6-F7 | 7000 - 8000 | 27 | 36 | — | dB |

1. Tested on Evaluation Board TB-BFCG-252+

2. This Filter is not intended for use as DC Blocking circuit element. In Application where DC Voltage is present at either input or output ports, blocking capacitors are required at the corresponding RF ports.

Maximum Ratings


| | |
|----------------------------------|----------------|
| Operating Temperature | -55°C to 125°C |
| Storage Temperature ³ | -55°C to 125°C |
| RF Power Input ⁴ | 2W at 25°C |

3. Refer to product storage temperature after installation. Suggestion for T&R unused product storage condition +5 - +35°C. Humidity 45-75% RH, 12 month Max.

4. Derate linearly to 0.5W @ 125°C.




Permanent damage may occur if any of these limits exceeded.

Typical Frequency Response

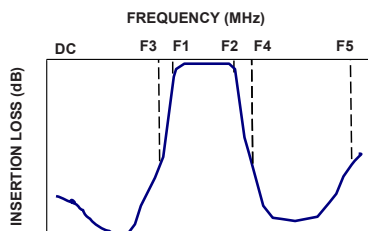

Typical Performance Data at 25°C

| Frequency (MHz) | Insertion Loss (dB) | Return Loss (dB) |
|-----------------|---------------------|------------------|
| 10 | 76.14 | 0.05 |
| 100 | 54.55 | 0.05 |
| 500 | 42.58 | 0.06 |
| 1000 | 51.94 | 0.09 |
| 1500 | 29.33 | 0.15 |
| 1860 | 17.55 | 0.34 |
| 2000 | 12.54 | 0.69 |
| 2400 | 1.40 | 15.05 |
| 2500 | 1.56 | 13.76 |
| 3000 | 20.55 | 0.30 |
| 4000 | 42.69 | 0.21 |
| 5000 | 42.04 | 0.39 |
| 6000 | 52.98 | 0.39 |
| 7000 | 46.28 | 0.23 |
| 8000 | 33.64 | 0.29 |

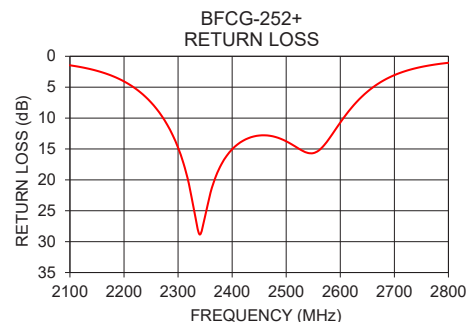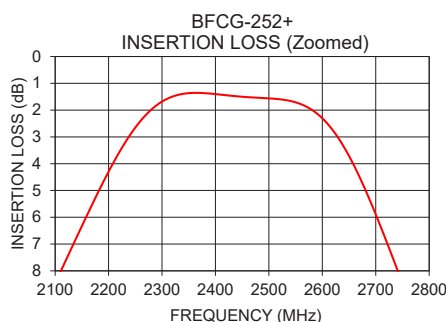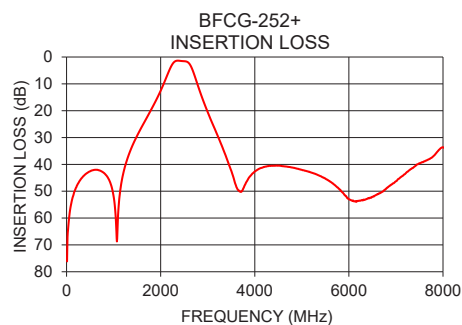

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. OR
ECO-004694
BFCG-252+
RS/CP/AM
201112
Page 2 of 3