

# BK200AAB Nickel Metal Hydride

## Features & Benefits

- Efficient, lower cost charge requirements with excellent cycle life.
- Options for broader operating temperatures.
- Versatile Applications including: Security, Medical, Automotive and Industrial Infrastructure.
- Higher levels of energy density, demanded by today's electronics.
- No transportation issues.
- Cells designed specifically to meet different, rigorous environments.

## Specifications

### Nominal

**Capacity:** 2000 mAh Typical

**Nominal Voltage:** 1.2V

**Weight:** Approximately 29g


**Operating Temperature:** 0°C - +45°C

## Dimensions





Unit: mm

## Typical Charge Characteristics

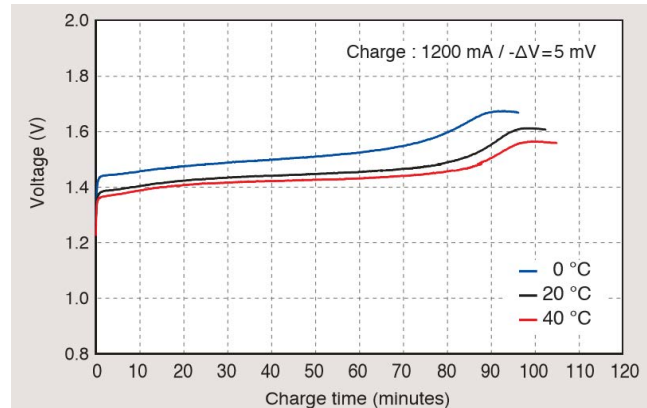

## Typical Discharge Characteristics

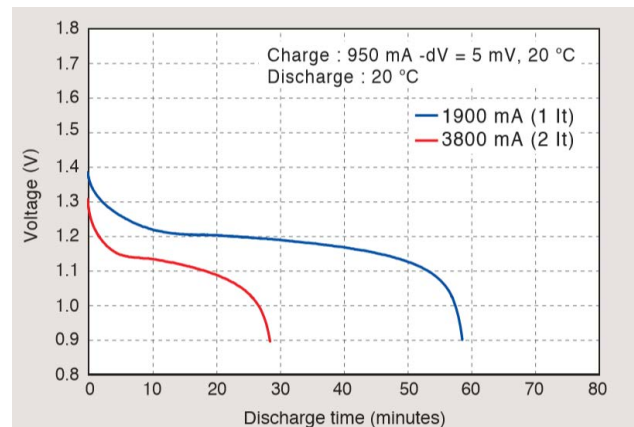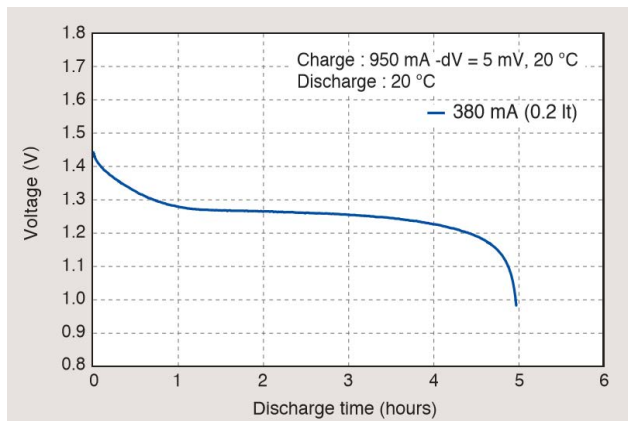

For more information on how Panasonic can assist you with your battery power solution needs call **877-726-2228**, visit [www.na.industrial.panasonic.com/products/batteries](http://www.na.industrial.panasonic.com/products/batteries) or e-mail [oembatteries@us.panasonic.com](mailto:oembatteries@us.panasonic.com).

The data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty.