


S-8000

1/4" x 1-1/4" Fuse blocks

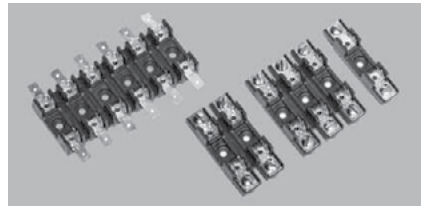

Product features

- For 1/4" x 1-1/4" (6 x 32 mm) fuses
- High voltage rating (Up to 600 V)
- Bolt-in, snap-in and DIN-rail mounting available
- Compact, tight cluster mounting
- Multiple types of terminal options
- Clips are made of bright tin-plated, spring bronze
- Anti-rotational pin available
- Thermoplastic base meets UL94 V-0

Agency information

- UL Recognized: E14853
- CSA Certified: 47235



Environmental compliance



General specifications


- Relative Temperature Index (RTI)
 - Bolt-in +130 °C
 - Snap-in +110 °C

Packaging prefix


- Blank- (Qty varies with number of poles)
- BK- (QTY varies with number of poles)

Ordering part number

Bolt-in mounting

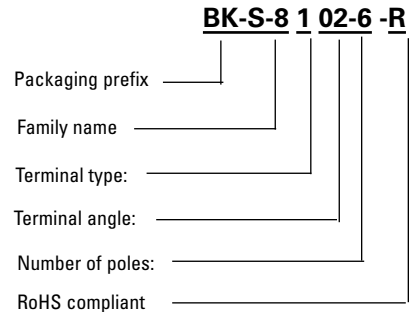

Snap-in and DIN-rail mounting

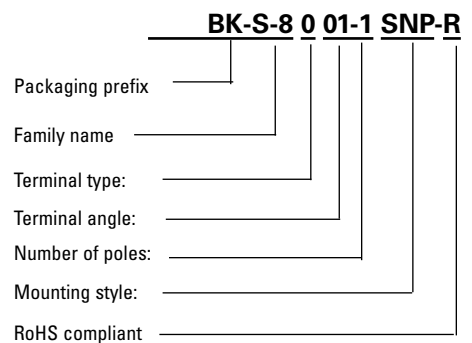

Terminal type: 0= solder
1= 3/16" quick connect
2= 1/4" quick connect
3= screw

Terminal angle: 01= straight
02= 40° angle
03= side*

Number of poles: (1 - 12)
1X= One pole, No mounting stud

Mounting style: SNP**= Snap-in mounting*
DIN**= DIN-rail mounting


*Available only in single pole and 3/16" or 1/4" quick connect terminals
** Available in single pole only

Specifications


| Family | UL voltage rating (V) | UL current rating (A) | CSA voltage rating (V) | CSA current rating (A) |
|--------|-----------------------|-----------------------|------------------------|------------------------|
| S-8000 | 600 | 30 | 300 | 21 |
| S-8100 | 600 | 20 | 300 | 13 |
| S-8200 | 600 | 30 | 300 | 16 |
| S-8300 | 600 | 30 | 300 | 25 |

Dimensions- mm/inches


S-8000 Single pole snap-in mounting

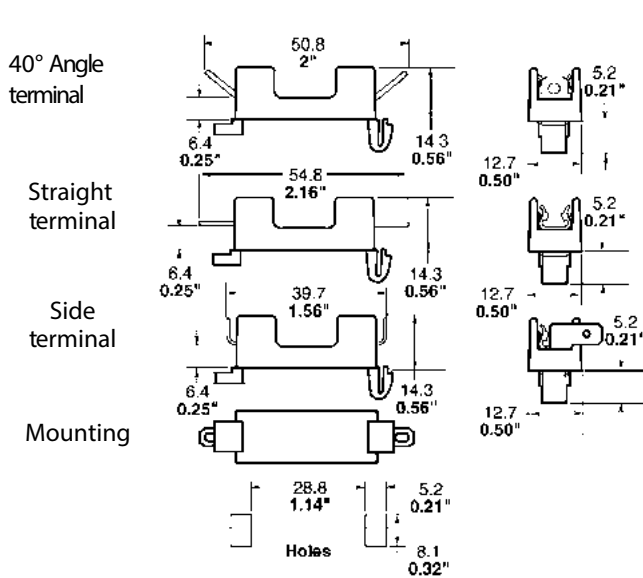

S-8000 Single pole bolt-in mounting

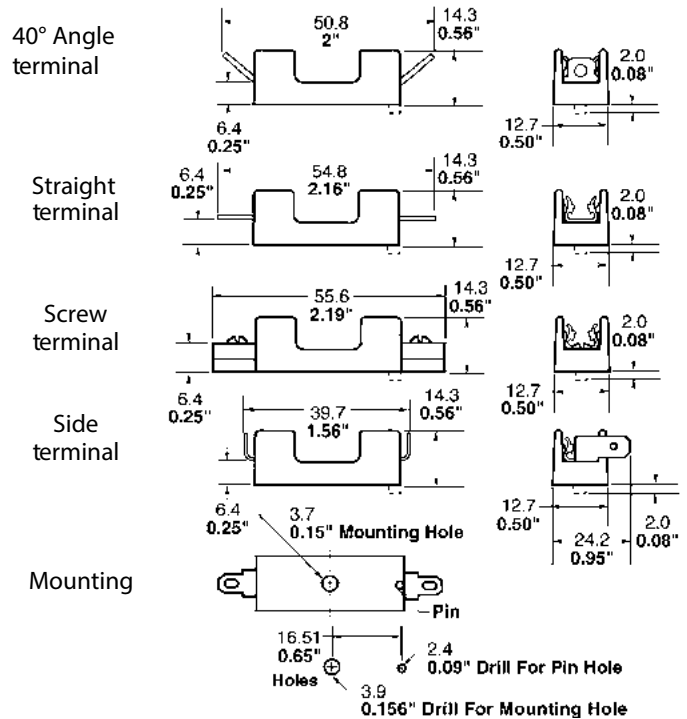

Multiple pole



Mounting dimensions

| Number of poles | A (inches) | B (inches) | A (mm) | B (mm) |
|-----------------|------------|------------|--------|--------|
| 1 | - | - | - | - |
| 2 | 1 1/8" | 5/8" | 28.6 | 15.9 |
| 3 | 1 3/4" | 1 1/4" | 44.4 | 31.8 |
| 4 | 2 3/8" | 1 7/8" | 60.3 | 47.6 |
| 5 | 3" | 2 1/2" | 76.2 | 63.5 |
| 6 | 3 5/8" | 3 1/8" | 92.1 | 79.4 |
| 7 | 4 1/4" | 3 3/4" | 108 | 95.2 |
| 8 | 4 7/8" | 4 3/8" | 123.8 | 111.1 |
| 9 | 5 1/2" | 5" | 139.7 | 127 |
| 10 | 6 1/8" | 5 5/8" | 155.6 | 142.9 |
| 11 | 6 3/4" | 6 1/4" | 171.4 | 158.8 |
| 12 | 7 3/8" | 6 7/8" | 187.3 | 174.6 |