


Jan.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

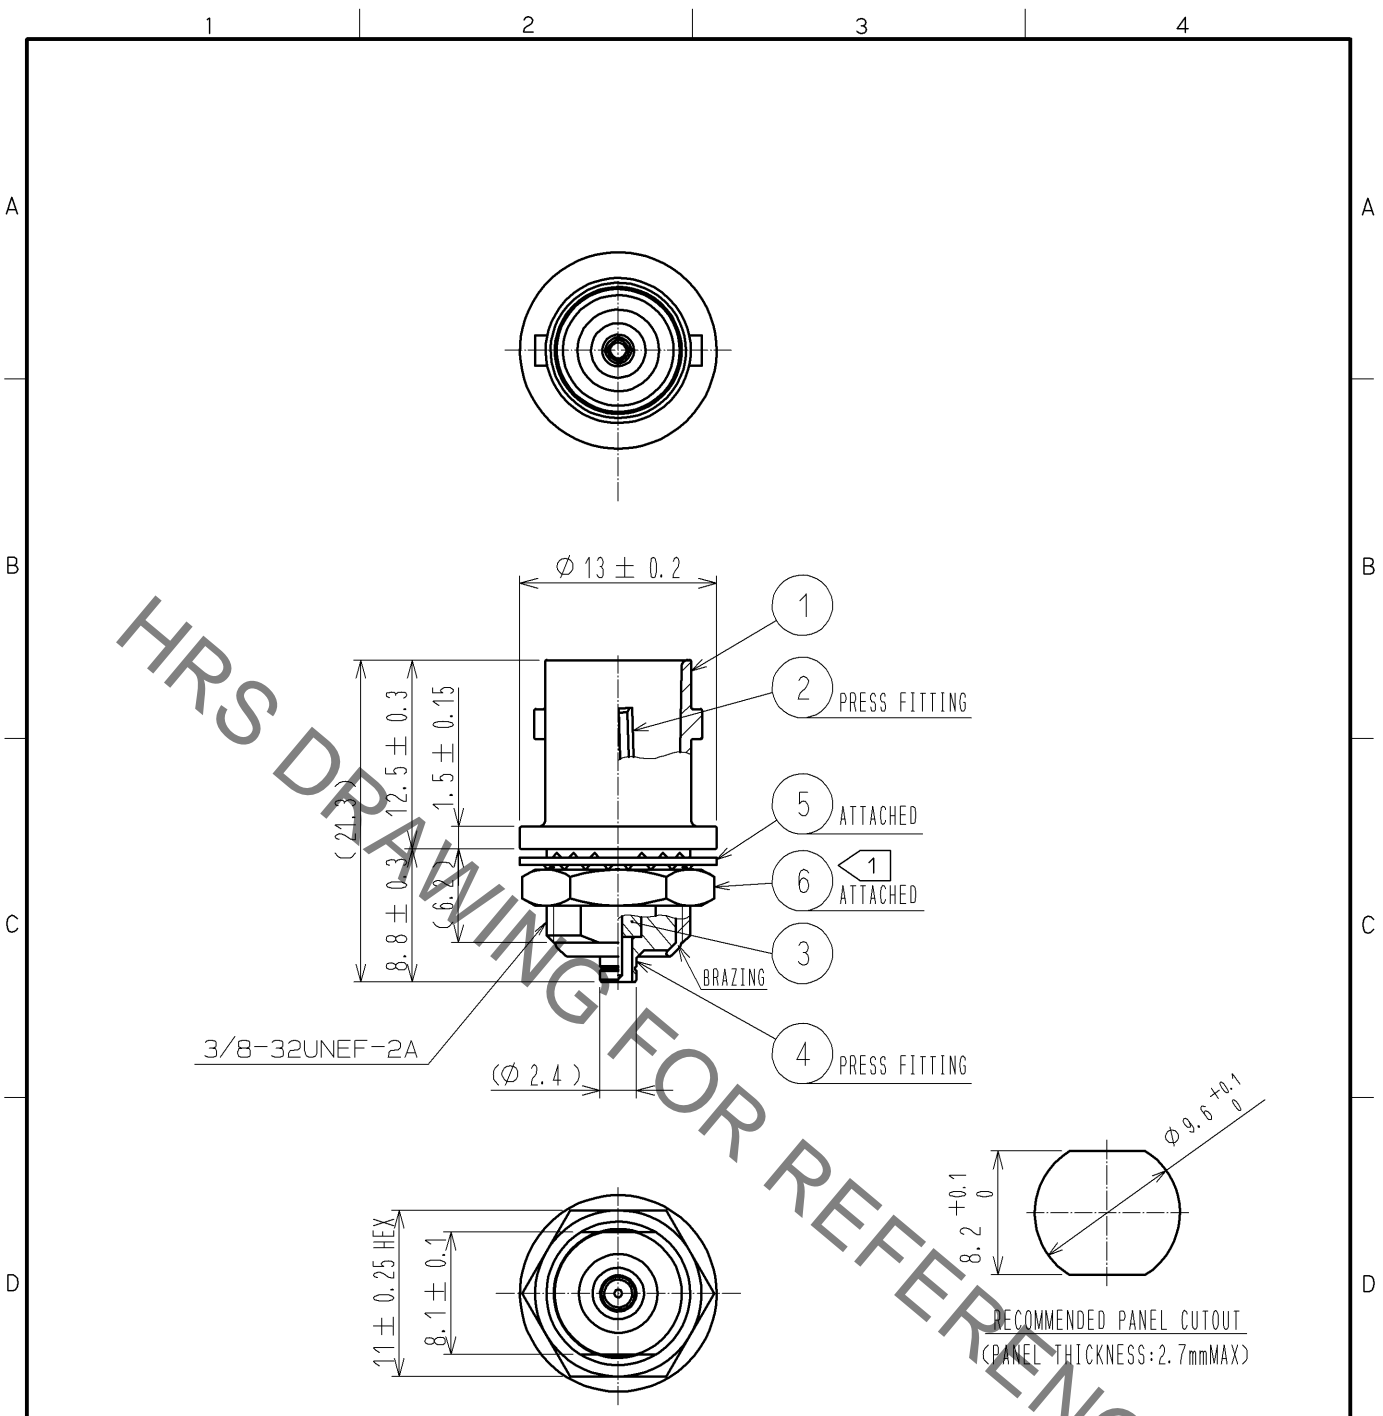

NOTE ① It is recommended that screw lock gel like 'Loctite' be used in the case of preventing the rotation of a locknut of REF.NO⑥, when this connector is installed in the panel.

RoHS COMPLIANT

3	PTFE		6	BRASS	NICKEL PLATING
2	PHOSPHOR BRONZE	GOLD PLATING	5	STEEL	NICKEL PLATING
1	ZINC ALLOY	NICKEL PLATING	4	BRASS	NICKEL PLATING
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS

UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HIROSE ELECTRIC CO., LTD.				APPROVED : MH. YAMANE 11. 01. 28 CHECKED : TS. NOBE 11. 01. 28 DESIGNED : YI. FUNADA 11. 01. 28 DRAWN : YI. FUNADA 11. 01. 28	DRAWING NO. EDC4-301127-40 PART NO. BNC<75>J-H. FLJ-BPA-V<40> CODE NO. CL311-0374-9-40		