MUELLER® DATASHEET

BU-P2451

(BNC Female Panel Receptacle)

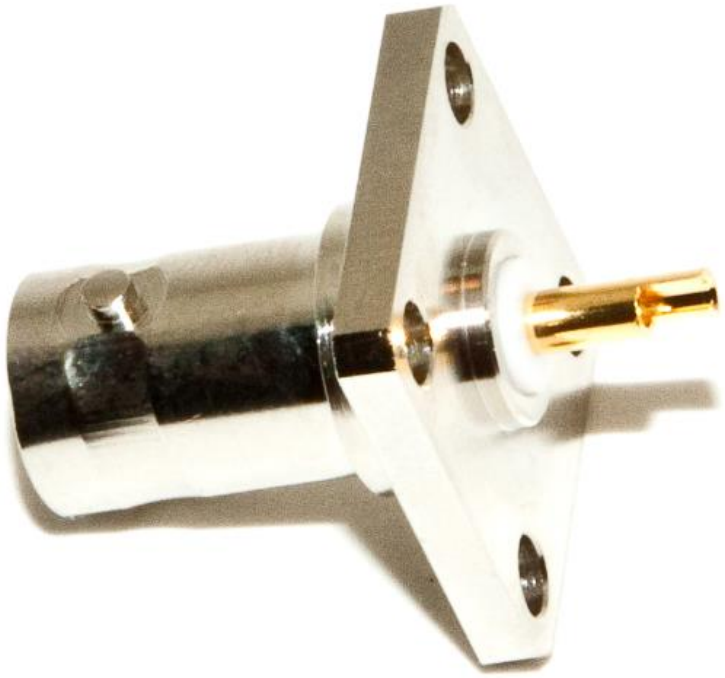

- Mueller's BU-P2451 is used as a BNC female receptacle that can be mounted to a panel with 0.53" (12.7mm) spacing between each hole.
- Material:
  - Body: Brass, tarnish-resistant plating
  - Center contact: Gold-plated beryllium copper
  - Dielectric: PTFE
- Rating
  - Nominal Impedance: 50 Ohms
  - Voltage: 30VAC/60VDC max, shield/earth
    500 VRMS inner conductor/shield
  - Temperature: -65°C (-85°F) to 165°C (329°F)
- RoHS 3 compliant, exemption 6c

Mueller Electric Company
2850 Gilchrist Rd. Bld 5A
Akron, OH 44305

www.muellerelectric.com

Toll Free: 800.955.2629
Phone: 330.780.2525
Fax: 330.780.2524