



# BZX84C2V4-AU SERIES

## SURFACE MOUNT SILICON ZENER DIODES

**VOLTAGE** 2.4 to 75 Volt **POWER** 410 mWatt


**SOT-23** Unit : inch(mm)

### FEATURES

- Planar Die construction
- 410mW Power Dissipation
- Zener Voltages from 2.4~75V
- Ideally Suited for Automated Assembly Processes
- AEC-Q101 qualified
- Lead free in compliance with EU RoHS2.0 (2011/65/EU & 2015/865/EU directive)
- Green molding compound as per IEC61249 Std. . (Halogen Free)

### MECHANICAL DATA

- Case: SOT-23, Molded Plastic
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.0003 ounces, 0.0084 grams

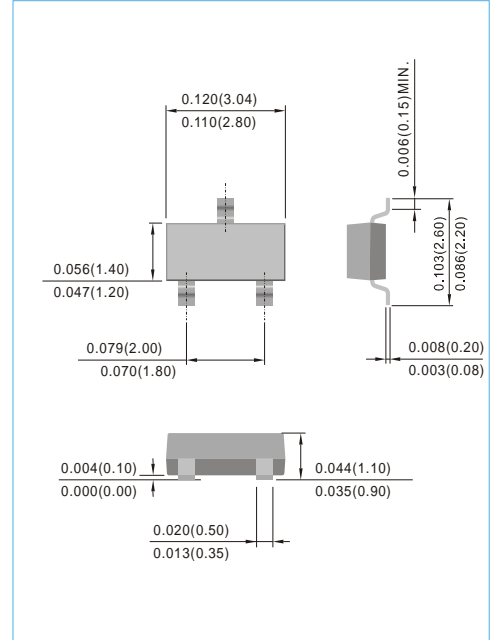


## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS(T<sub>A</sub>=25°C unless otherwise noted)

| Parameter   | Symbol           | Value       | Units |
|---|------------------|-------------|-------|
| Maximum Power Dissipation (Notes 1) at 25°C               | P <sub>D</sub>   | 410         | mW    |
| Typical Thermal Resistance, Junction to Ambient (Notes 2) | R <sub>θJA</sub> | 500         | °C/W  |
| Operating Junction and Storage Temperature Range          | T <sub>J</sub>   | -55 to +150 | °C    |

### NOTES:

1. Mounted on 50mmX16mm FR-4 board.
2. Mounted on minimum pad layout (1cmX1cm FR-4 board).





## BZX84C2V4-AU SERIES

| Part Number  | Nominal Zener Voltage            |        |        | Max. Zener Impedance              |     |                                   |      | Max Reverse Leakage Current     |      | Marking Code |
|--------------|----------------------------------|--------|--------|-----------------------------------|-----|-----------------------------------|------|---------------------------------|------|--------------|
|              | V <sub>Z</sub> @ I <sub>ZT</sub> |        |        | Z <sub>ZT</sub> @ I <sub>ZT</sub> |     | Z <sub>ZK</sub> @ I <sub>ZK</sub> |      | I <sub>R</sub> @ V <sub>R</sub> |      |              |
|              | Nom. V                           | Min. V | Max. V | Ω                                 | mA  | Ω                                 | mA   | μA                              | V    |              |
| BZX84C2V4-AU | 2.4                              | 2.28   | 2.52   | 100                               | 5.0 | 600                               | 1.00 | 50                              | 1.0  | W1           |
| BZX84C2V7-AU | 2.7                              | 2.57   | 2.84   | 100                               | 5.0 | 600                               | 1.00 | 20                              | 1.0  | W2           |
| BZX84C3-AU   | 3                                | 2.85   | 3.15   | 95                                | 5.0 | 600                               | 1.00 | 10                              | 1.0  | W3           |
| BZX84C3V3-AU | 3.3                              | 3.14   | 3.47   | 95                                | 5.0 | 600                               | 1.00 | 5.0                             | 1.0  | W4           |
| BZX84C3V6-AU | 3.6                              | 3.42   | 3.78   | 90                                | 5.0 | 600                               | 1.00 | 5.0                             | 1.0  | W5           |
| BZX84C3V9-AU | 3.9                              | 3.71   | 4.10   | 90                                | 5.0 | 600                               | 1.00 | 3.0                             | 1.0  | W6           |
| BZX84C4V3-AU | 4.3                              | 4.09   | 4.52   | 90                                | 5.0 | 600                               | 1.00 | 3.0                             | 1.0  | W7           |
| BZX84C4V7-AU | 4.7                              | 4.47   | 4.94   | 80                                | 5.0 | 500                               | 1.00 | 3.0                             | 2.0  | W8           |
| BZX84C5V1-AU | 5.1                              | 4.85   | 5.36   | 60                                | 5.0 | 480                               | 1.00 | 2.0                             | 2.0  | W9           |
| BZX84C5V6-AU | 5.6                              | 5.32   | 5.88   | 40                                | 5.0 | 400                               | 1.00 | 1.0                             | 2.0  | WA           |
| BZX84C6V2-AU | 6.2                              | 5.89   | 6.51   | 10                                | 5.0 | 150                               | 1.00 | 3.0                             | 4.0  | WB           |
| BZX84C6V8-AU | 6.8                              | 6.46   | 7.14   | 15                                | 5.0 | 80                                | 1.00 | 2.0                             | 4.0  | WC           |
| BZX84C7V5-AU | 7.5                              | 7.13   | 7.88   | 15                                | 5.0 | 80                                | 1.00 | 1.0                             | 5.0  | WD           |
| BZX84C8V2-AU | 8.2                              | 7.79   | 8.61   | 15                                | 5.0 | 80                                | 1.00 | 0.7                             | 5.0  | WE           |
| BZX84C8V7-AU | 8.7                              | 8.27   | 9.14   | 15                                | 5.0 | 100                               | 1.00 | 0.7                             | 5.0  | 87C          |
| BZX84C9V1-AU | 9.1                              | 8.65   | 9.56   | 15                                | 5.0 | 100                               | 1.00 | 0.5                             | 6.0  | WF           |
| BZX84C10-AU  | 10                               | 9.50   | 10.50  | 20                                | 5.0 | 150                               | 1.00 | 0.2                             | 7.0  | WG           |
| BZX84C11-AU  | 11                               | 10.45  | 11.55  | 20                                | 5.0 | 150                               | 1.00 | 0.1                             | 8.0  | WH           |
| BZX84C12-AU  | 12                               | 11.40  | 12.60  | 25                                | 5.0 | 150                               | 1.00 | 0.1                             | 8.0  | WI           |
| BZX84C13-AU  | 13                               | 12.35  | 13.65  | 30                                | 5.0 | 170                               | 1.00 | 0.1                             | 8.0  | WK           |
| BZX84C14-AU  | 14                               | 13.30  | 14.70  | 30                                | 5.0 | 170                               | 1.00 | 0.1                             | 10.0 | WJ           |
| BZX84C15-AU  | 15                               | 14.25  | 15.75  | 30                                | 5.0 | 200                               | 1.00 | 0.1                             | 10.5 | WL           |
| BZX84C16-AU  | 16                               | 15.20  | 16.80  | 40                                | 5.0 | 200                               | 1.00 | 0.1                             | 11.2 | WM           |
| BZX84C17-AU  | 17                               | 16.15  | 17.85  | 40                                | 5.0 | 200                               | 1.00 | 0.1                             | 12.2 | 17C          |
| BZX84C18-AU  | 18                               | 17.10  | 18.90  | 45                                | 5.0 | 225                               | 1.00 | 0.1                             | 12.6 | WN           |
| BZX84C20-AU  | 20                               | 19.00  | 21.00  | 55                                | 5.0 | 225                               | 1.00 | 0.1                             | 14.0 | WO           |
| BZX84C22-AU  | 22                               | 20.90  | 23.10  | 55                                | 5.0 | 250                               | 1.00 | 0.1                             | 15.4 | WP           |
| BZX84C24-AU  | 24                               | 22.80  | 25.20  | 70                                | 5.0 | 250                               | 1.00 | 0.1                             | 16.8 | WR           |
| BZX84C27-AU  | 27                               | 25.65  | 28.35  | 80                                | 5.0 | 300                               | 1.00 | 0.1                             | 18.9 | WS           |
| BZX84C28-AU  | 28                               | 26.60  | 29.40  | 80                                | 5.0 | 300                               | 1.00 | 0.1                             | 20.5 | 28C          |
| BZX84C30-AU  | 30                               | 28.50  | 31.50  | 80                                | 5.0 | 300                               | 1.00 | 0.1                             | 21.0 | WT           |
| BZX84C33-AU  | 33                               | 31.35  | 34.65  | 80                                | 5.0 | 325                               | 1.00 | 0.1                             | 23.1 | WU           |
| BZX84C36-AU  | 36                               | 34.20  | 37.80  | 90                                | 5.0 | 350                               | 1.00 | 0.1                             | 25.2 | WW           |
| BZX84C39-AU  | 39                               | 37.05  | 40.95  | 130                               | 5.0 | 350                               | 1.00 | 0.1                             | 27.3 | WX           |
| BZX84C43-AU  | 43                               | 40.85  | 45.15  | 150                               | 5.0 | 375                               | 1.00 | 0.1                             | 30.1 | WY           |
| BZX84C47-AU  | 47                               | 44.65  | 49.35  | 170                               | 5.0 | 375                               | 1.00 | 0.1                             | 32.9 | WZ           |
| BZX84C51-AU  | 51                               | 48.45  | 53.55  | 100                               | 5.0 | 400                               | 1.00 | 0.1                             | 38.0 | XA           |
| BZX84C56-AU  | 56                               | 53.20  | 58.80  | 135                               | 2.5 | 1000                              | 1.00 | 0.1                             | 42.0 | X2           |
| BZX84C62-AU  | 62                               | 58.90  | 65.10  | 150                               | 2.5 | 1000                              | 1.00 | 0.1                             | 46.0 | X3           |
| BZX84C68-AU  | 68                               | 64.60  | 71.40  | 200                               | 2.5 | 1000                              | 1.00 | 0.1                             | 51.0 | X4           |
| BZX84C75-AU  | 75                               | 71.25  | 78.75  | 250                               | 2.5 | 1000                              | 1.00 | 0.1                             | 56.0 | X5           |



# BZX84C2V4-AU SERIES

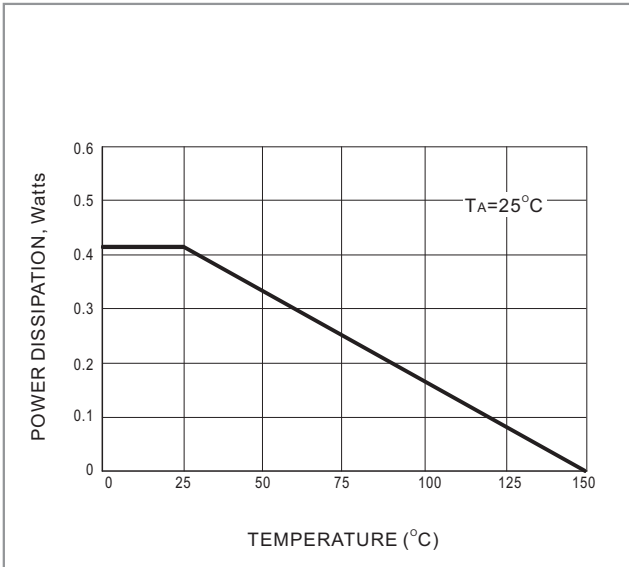


Fig. 1 STEADY STATE POWER DERATING

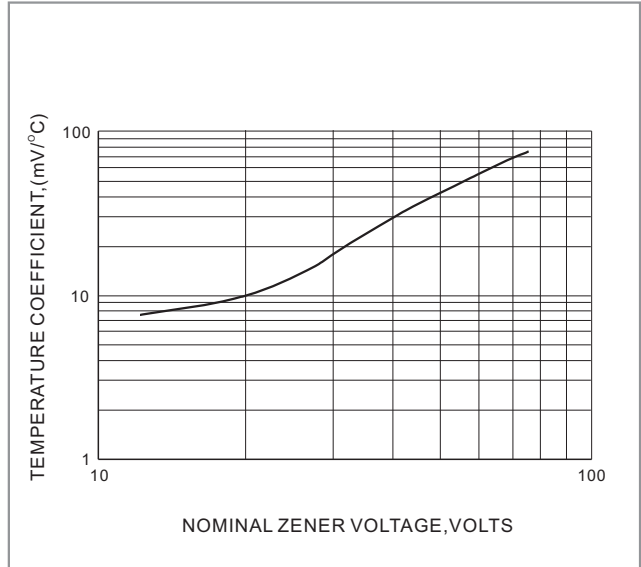


Fig. 2 TEMPERATURE COEFFICIENTS

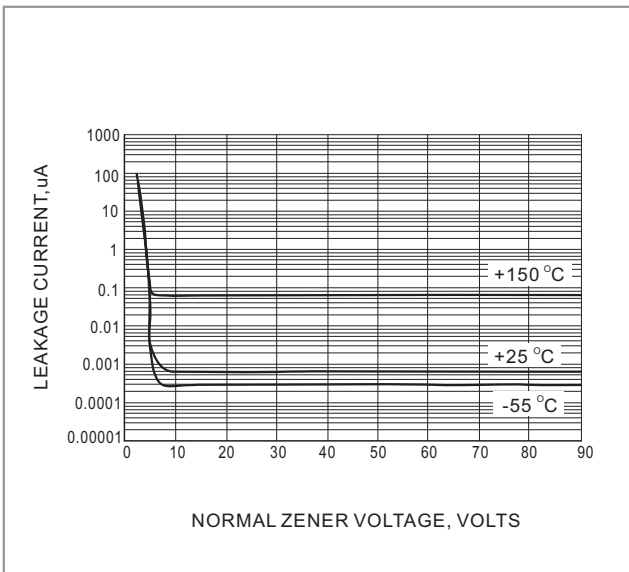


Fig. 3 TYPICAL LEAKAGE CURRENT


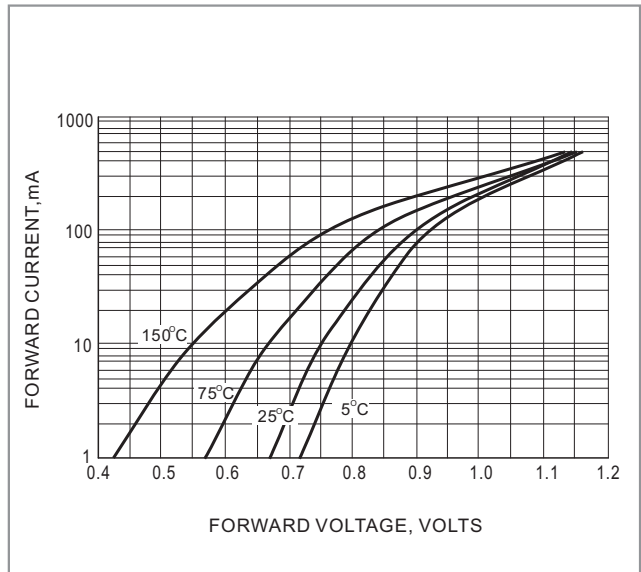


Fig. 4 TYPICAL FORWARD VOLTAGE



## BZX84C2V4-AU SERIES

### MOUNTING PAD LAYOUT

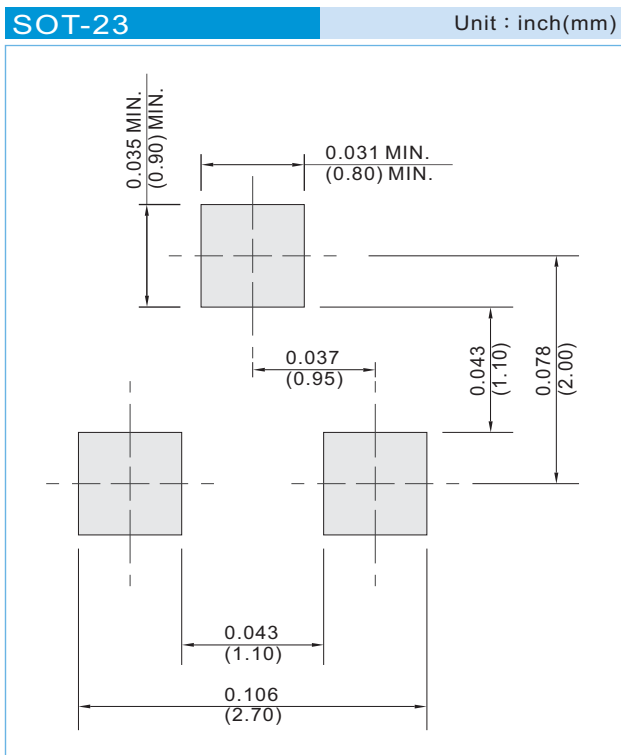

### ORDER INFORMATION

- Packing information  
T/R - 12K per 13" plastic Reel  
T/R - 3K per 7" plastic Reel



# BZX84C2V4-AU SERIES


**Part No\_packing code\_Version**

BZX84C2V4-AU\_R1\_000A1

BZX84C2V4-AU\_R2\_000A1

**For example :**

**RB500V-40\_R2\_00001**

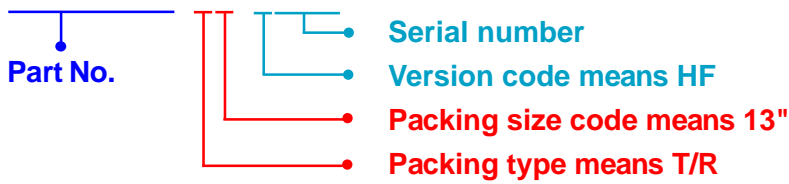

| Packing Code <b>XX</b>               |                      |                                  |                      | Version Code <b>XXXXX</b> |                      |                                       |
|--------------------------------------|----------------------|----------------------------------|----------------------|---------------------------|----------------------|---------------------------------------|
| Packing type                         | 1 <sup>st</sup> Code | Packing size code                | 2 <sup>nd</sup> Code | HF or RoHS                | 1 <sup>st</sup> Code | 2 <sup>nd</sup> -5 <sup>th</sup> Code |
| Tape and Ammunition Box (T/B)        | <b>A</b>             | N/A                              | <b>0</b>             | <b>HF</b>                 | <b>0</b>             | serial number                         |
| Tape and Reel (T/R)                  | <b>R</b>             | 7"                               | <b>1</b>             | <b>RoHS</b>               | <b>1</b>             | serial number                         |
| Bulk Packing (B/P)                   | <b>B</b>             | 13"                              | <b>2</b>             |                           |                      |                                       |
| Tube Packing (T/P)                   | <b>T</b>             | 26mm                             | <b>X</b>             |                           |                      |                                       |
| Tape and Reel (Right Oriented) (TRR) | <b>S</b>             | 52mm                             | <b>Y</b>             |                           |                      |                                       |
| Tape and Reel (Left Oriented) (TRL)  | <b>L</b>             | PANASERT T/B CATHODE UP (PBCU)   | <b>U</b>             |                           |                      |                                       |
| FORMING                              | <b>F</b>             | PANASERT T/B CATHODE DOWN (PBCD) | <b>D</b>             |                           |                      |                                       |