

## GT4-M

~30° medium beam

### **TECHNICAL SPECIFICATIONS:**

Dimensions Ø 35.0 mm

Height 9 mm

Fastening glue, pin

ROHS compliant yes 1



### **MATERIAL SPECIFICATIONS:**

ComponentTypeMaterialColourFinishGT4-MMulti-lensPMMAclear


#### **ORDERING INFORMATION:**

» Box size: 300 x 250 x 250 mm

Component Qty in box MOQ MPQ Box weight (kg)

C10922\_GT4-M 864 144 144 2.1



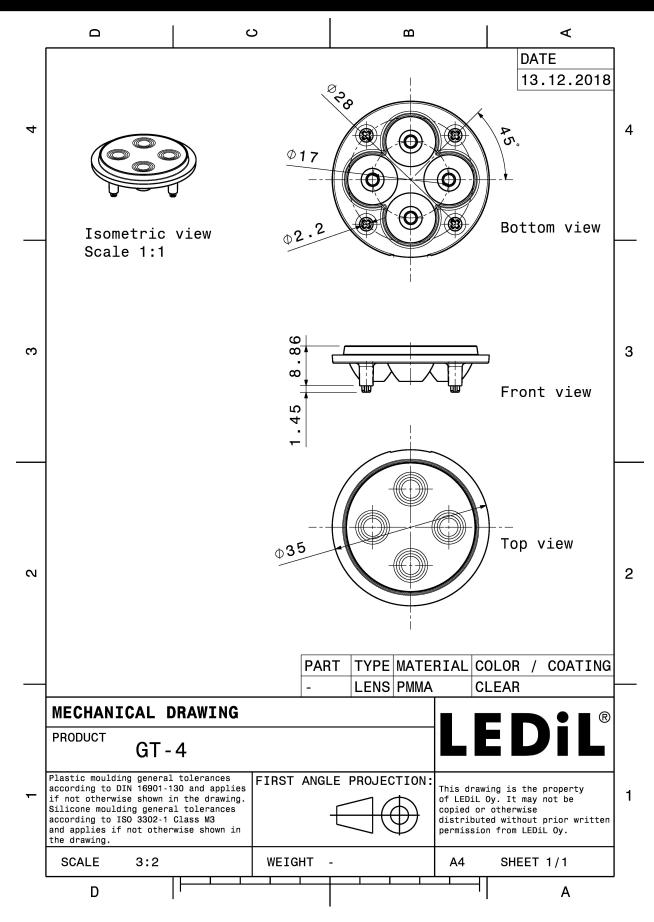

See also our general installation guide: <a href="www.ledil.com/installation\_guide">www.ledil.com/installation\_guide</a>



# PHOTOMETRIC DATA (MEASURED):

### CREE \$\text{LED}


LED XB-D
FWHM / FWTM 25.0°
Efficiency 92 %
Peak intensity 2.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:



### CREE & LED


LED XP-E
FWHM / FWTM 27.0° / 54.0°
Efficiency 86 %
Peak intensity 2.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:





### CREE \$\(\phi\) LED

LED XP-G
FWHM / FWTM 33.0° / 63.0°
Efficiency 85 %
Peak intensity 1.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:



# **DESCRIPTION** LUMILEDS

LED LUXEON A FWHM / FWTM 32.0° / 62.0°

Efficiency %
LEDs/each optic 1
Light colour White
Required components:



# PHOTOMETRIC DATA (MEASURED):



LED LUXEON Rebel ES

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ 31.0° / 61.0° Efficiency 86 % Peak intensity 2.1 cd/lm

LEDs/each optic Light colour White Required components:

#### **OSRAM**


LED OSLON SSL 150 FWHM / FWTM 24.0° / 44.0° Efficiency 89 % Peak intensity 3.5 cd/lm LEDs/each optic 1

White Light colour Required components:

# OSRAM Opto Semiconductors

LED OSLON SSL 80  $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ 29.0° / 59.0° Efficiency 87 % Peak intensity 2.1 cd/lm LEDs/each optic Light colour White Required components:





# **SHARP**

LED Double Dome (GM2BB)

FWHM / FWTM 30.0° Efficiency % LEDs/each optic White Light colour Required components:




# PHOTOMETRIC DATA (SIMULATED):

# OSRAM Opto Semiconductors

LED Synios P2720 1/4 mm

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ 27.0° / 54.0° 94 % Efficiency 3.2 cd/lm Peak intensity LEDs/each optic Light colour White

Required components:



#### SEOUL SEOUL SEMICONDUCTOR

LED **Z**5 FWHM / FWTM 26.0° Efficiency % LEDs/each optic 1 White Light colour

Required components: