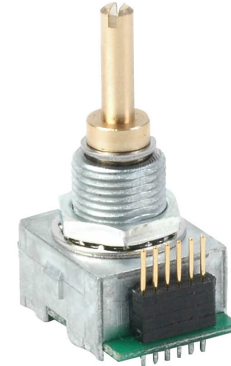


**SERIES:** C14 | **DESCRIPTION:** PANEL MOUNT ENCODER

**FEATURES**

- 2-bit quadrature output
- compact
- rugged metal design
- 1 million cycle life
- multiple termination options
- IP65 rating option
- plastic shaft options available for medical applications


**ELECTRICAL**

parameter	conditions/description	min	typ	max	units
power supply	3.3Vdc input models	3.168	3.3	3.432	Vdc
	5Vdc input models	4.75	5	5.25	Vdc
supply current	3.3Vdc input models			40	mA
	5Vdc input models			20	mA
output	open collector				
output code	2-bit quadrature, channel A leads channel B by 90° with clockwise rotation				
power consumption	3.3Vdc input models			132	mW
	5Vdc input models			100	mW
output resolution	4 ppr (16 cpr), 8 ppr (32 cpr)				
angle of throw	16 detent position models		22.5		°
	32 detent position models		11.25		°

**PUSH SWITCH SPECIFICATIONS**

parameter	conditions/description	min	typ	max	units
rating	12 Vdc at 50 mA				
contact resistance				200	mΩ
isolation voltage	for 1 minute		250		Vac
insulation resistance		100			MΩ
operating push force		3.5	4.5	5.5	N
travel		0.2	0.5	0.8	mm
bounce				10	ms
push switch life			1,000,000		cycles

**ENVIRONMENTAL**

parameter	conditions/description	min	typ	max	units
operating temperature		-10		70	°C
storage temperature		-20		80	°C
vibration	10-55Hz with a peak to peak amplitude of 1.5mm				
shock	half sine wave for 11ms		50		G
cold test	at -20°C for 96 hours				
heat test	at +80°C for 96 hours				


## ENVIRONMENTAL (CONTINUED)

parameter	conditions/description	min	typ	max	units
temperature change test	at -10~70°C for 30 minutes each				
humidity test	at 40°C, 90~95% humidity for 96 hours				
RoHS	yes				

## MECHANICAL

parameter	conditions/description	min	typ	max	units
shaft load	radial			10	N
	axial			15	N
operational torque	without detent	0.2	0.4	0.2	N-cm
	with detent			0.6	N-cm
mounting torque			100		N-cm
rotational life			1,000,000		cycles
weight			11		g

## OUTPUT WAVEFORMS

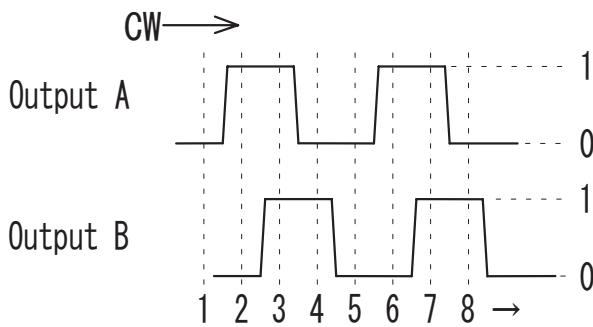

Position \ Output	1	2	3	4	5
A	0	1	1	0	0
B	0	0	1	1	0

(1) 3.3V : "0":0.8V max. "1":2.3V min.

(2) 5V : "0":1.0V max. "1":3.0V min.

\*The code repeats from 1 to 4.

## PART NUMBER KEY

**C14 X XX X - X X X X**

Base Number

Detent:  
D = with detent  
N = without detent

Angle of throw:  
16 = 22.5° for code change  
and 16 detent positions  
32 = 11.25° for code change  
and 32 detent positions

Push Switch:  
P = with push switch  
N = without push switch

Termination:  
A = Ø0.5 mm holes  
B = 130 mm cable with  
connector  
C = with header I  
D = with header II  
E = horizontal PCB  
F = vertical PCB


Input Voltage:  
"blank" = 5 V input  
3 = 3.3 V input

Waterproof:  
"blank" = standard  
A = IP65

Shaft Diameter:  
1 = Ø3.175 mm [1/8"]  
2 = Ø6 mm  
2P = Ø6 mm, plastic  
3 = Ø6.35 mm [1/4"]  
3P = Ø6.35 mm [1/4"], plastic


## OUTPUT CIRCUIT

5V Input

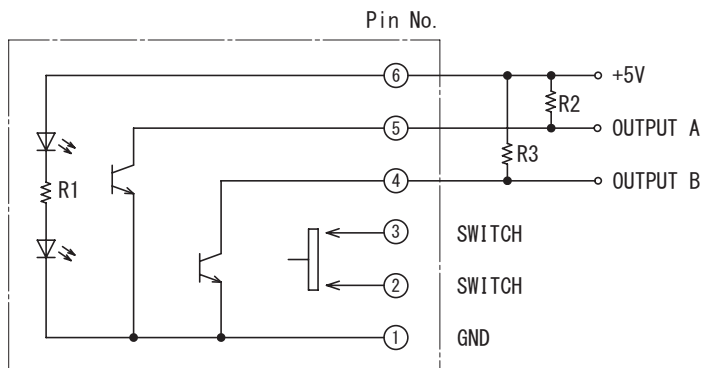

\* R2, R3: External pull-up resistors 5.1K $\Omega$

3.3V Input

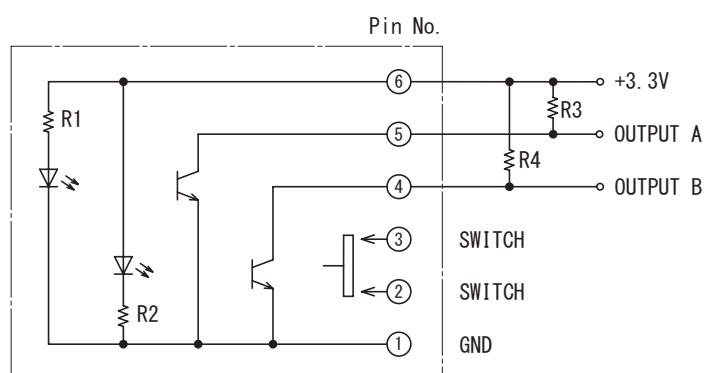


\* R3, R4: External pull-up resistors 5.1K $\Omega$

## MECHANICAL DRAWING

### 5V INPUT, WITH PUSH SWITCH


units: mm

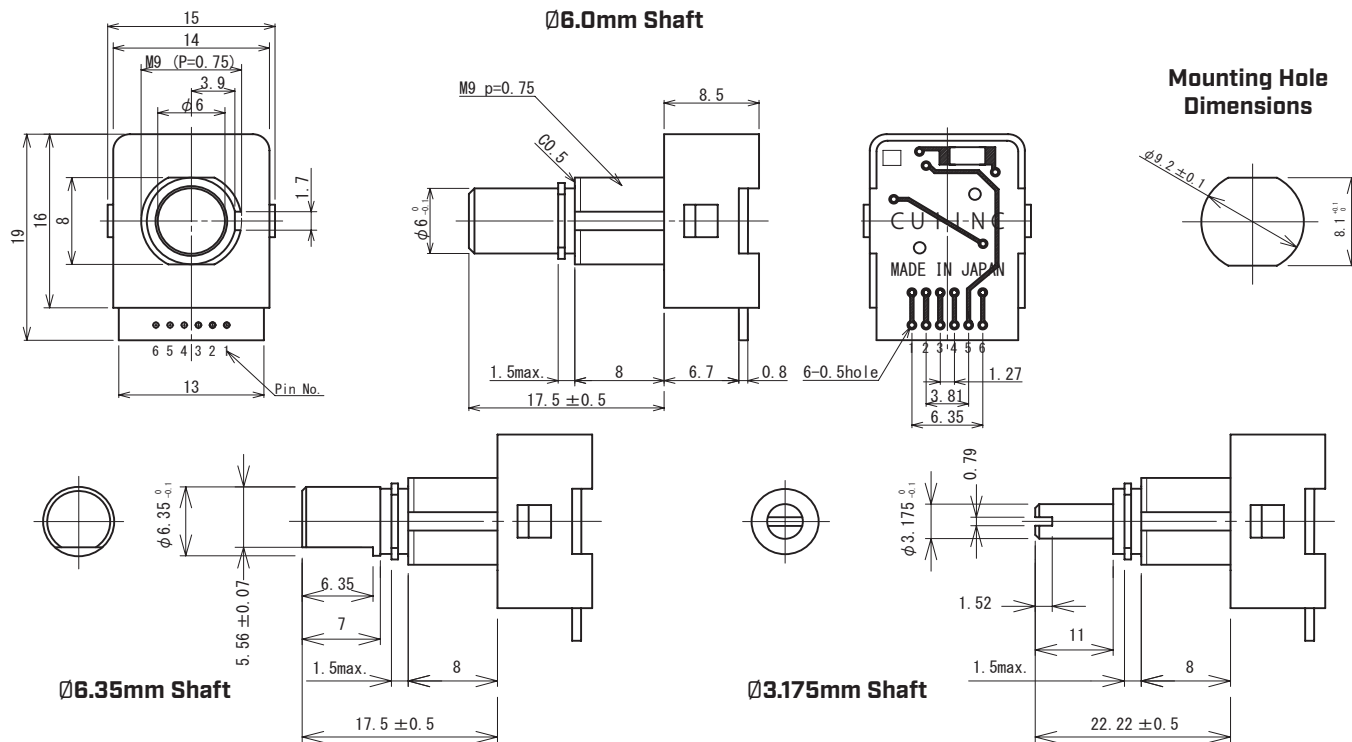

## MECHANICAL DRAWING (CONTINUED)


### 5V INPUT, WITHOUT PUSH SWITCH

units: mm

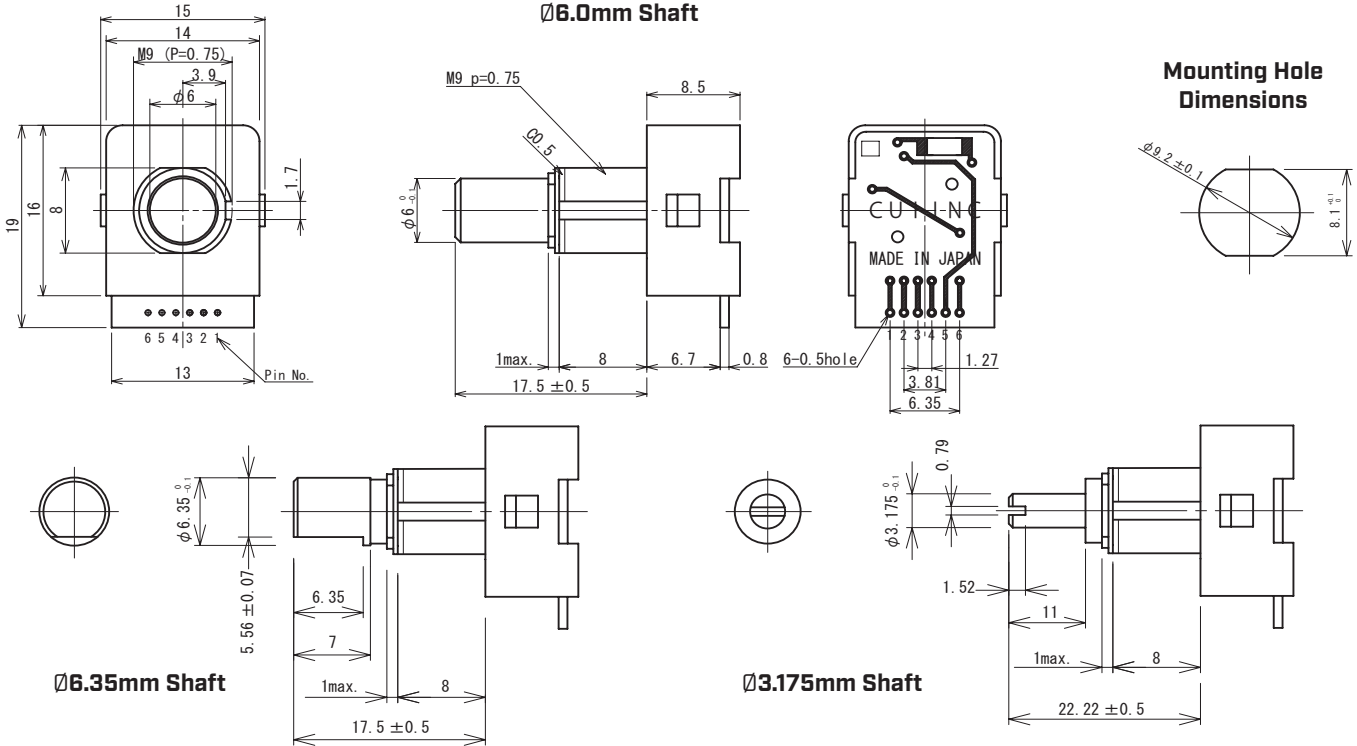

### 3.3V INPUT, WITH PUSH SWITCH


units: mm

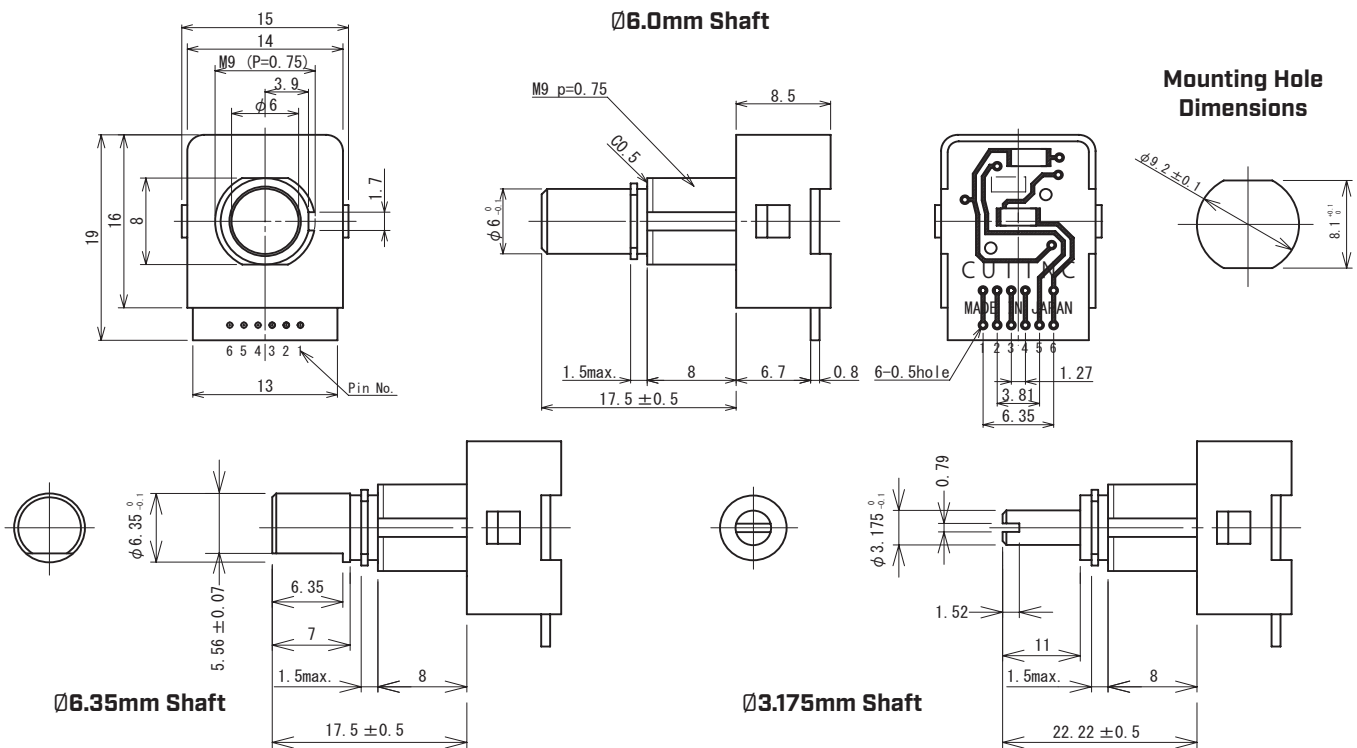

## MECHANICAL DRAWING (CONTINUED)


### 3.3V INPUT, WITHOUT PUSH SWITCH

units: mm

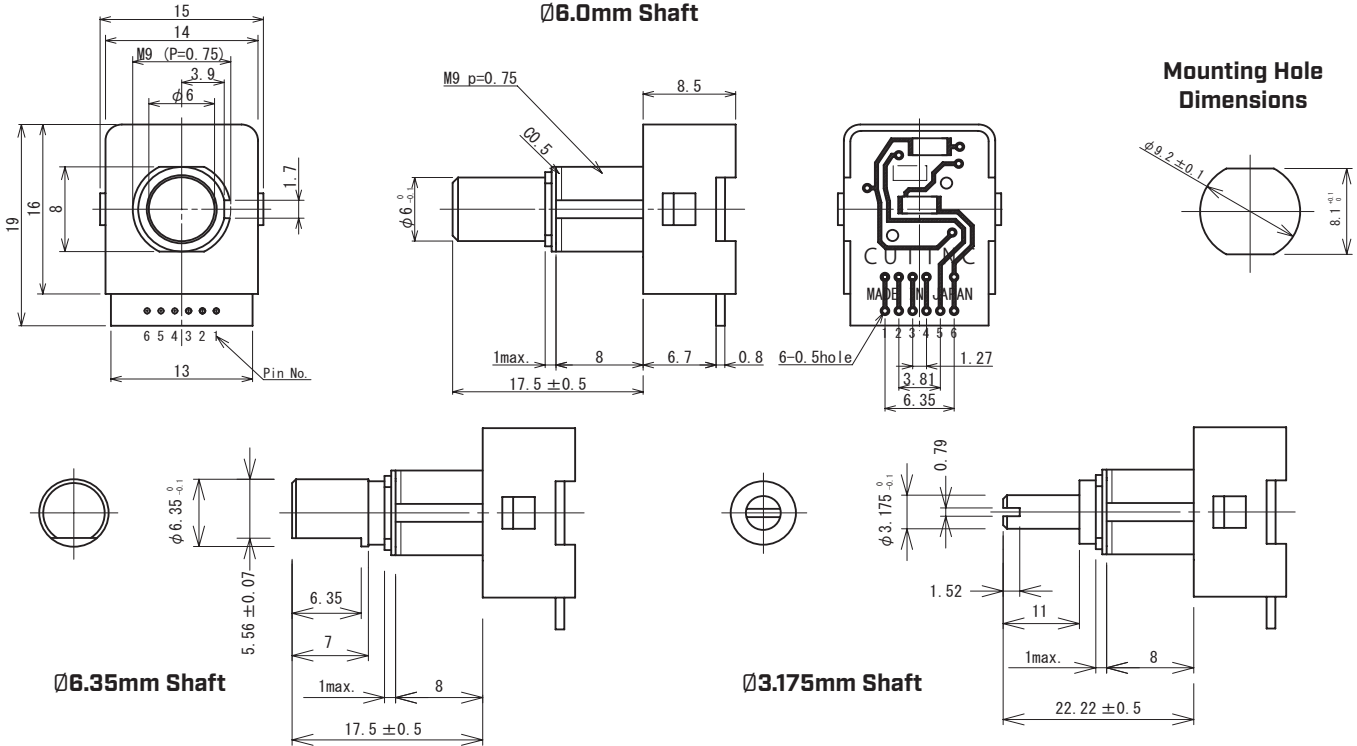

## MECHANICAL DRAWING, TERMINATION OPTIONS


units: mm

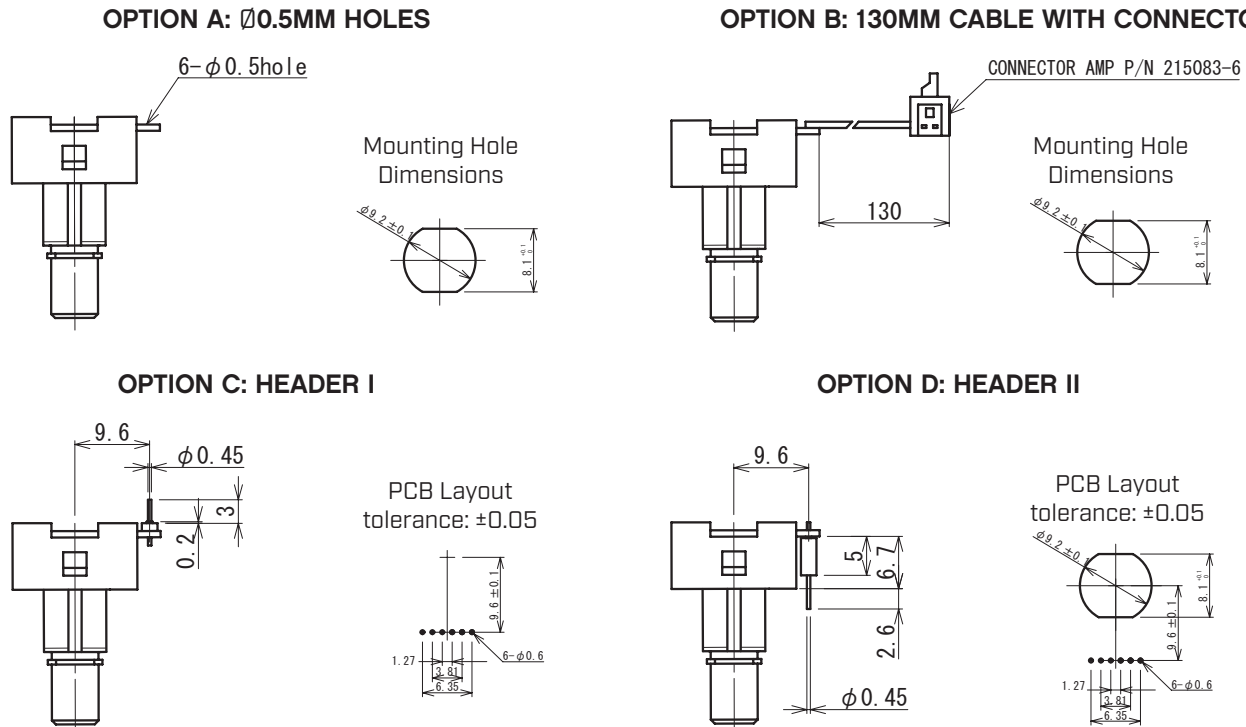


## MECHANICAL DRAWING, TERMINATION OPTIONS (CONTINUED)

units: mm

### OPTION E: HORIZONTAL PCB

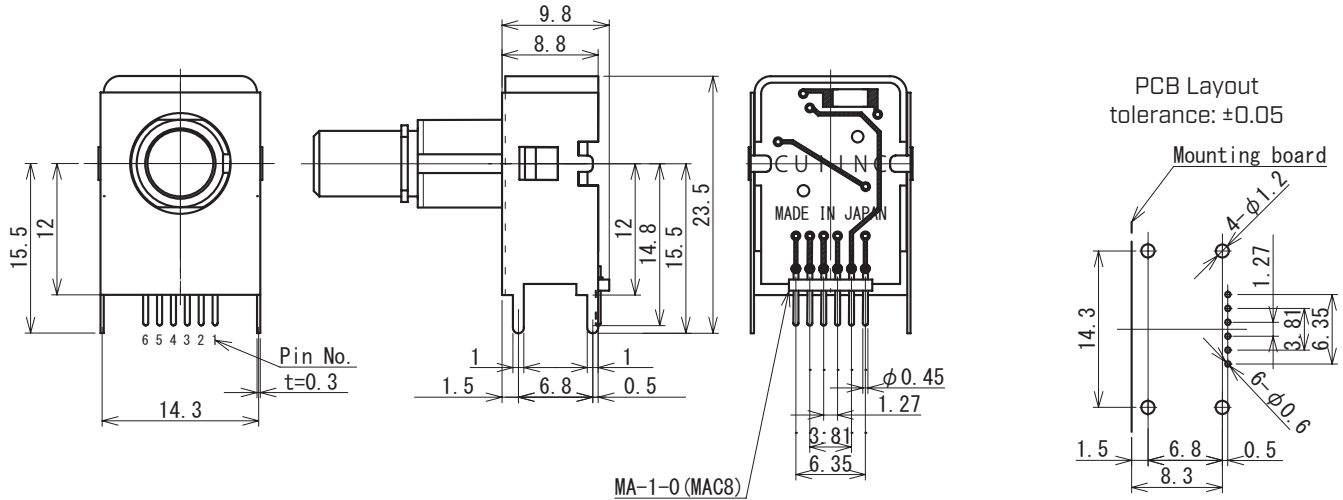

### OPTION F: VERTICAL PCB

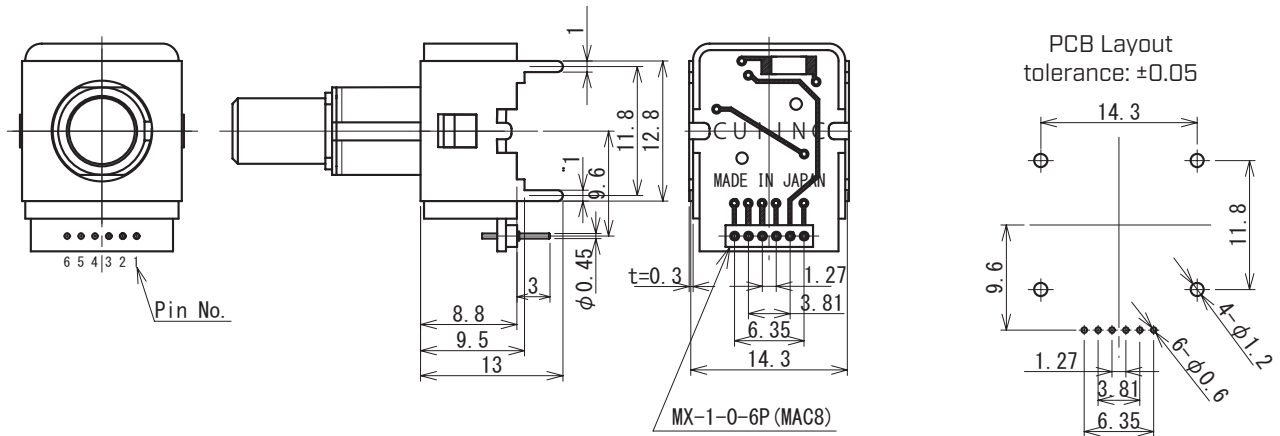

## WATERPROOF MOUNTING



No.	Qty.	Component
1	1	waterproof washer
2	1	panel
3	1	toothed lock washer
4	1	nut

Note: 1. Protects against ingress of water (IP65) from front side of panel only.