


## STRADELLA-IP-64-VSM

IESNA Type V (square) beam for wide areas lighting such as car parks.

### SPECIFICATION:

Dimensions	253.0 x 74.0 mm
Height	9.7 mm
Fastening	screw
Ingress protection classes	IP66, IP67
ROHS compliant	yes ⓘ

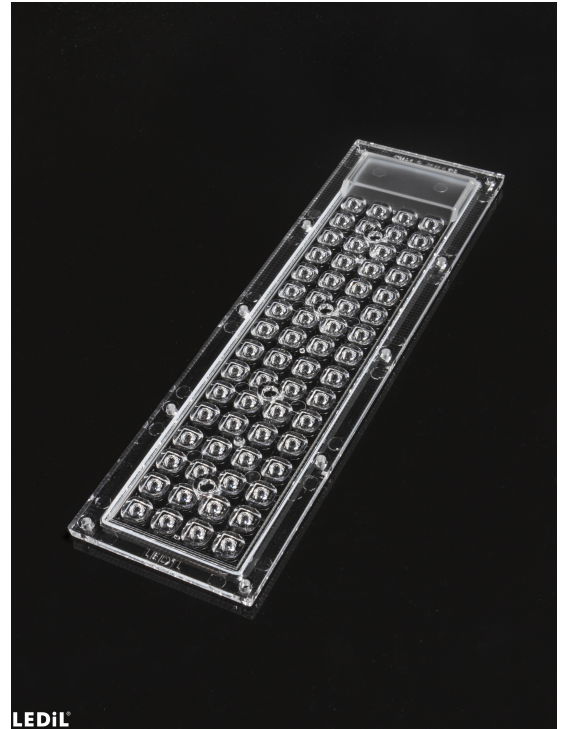


### MATERIALS:

Component	Type	Material	Colour	Finish
STRADELLA-IP-64-VSM	Multi-lens	PMMA	clear	
STRADELLA-IP-64-SEAL	Seal	Silicone	milky	





### ORDERING INFORMATION:

Component	Type	Qty in box	MOQ	MPQ	Box weight (kg)
CS17646_STRADELLA-IP-64-VSM » Box size: 476 x 273 x 247 mm	Multi-lens	108	108	36	8.8

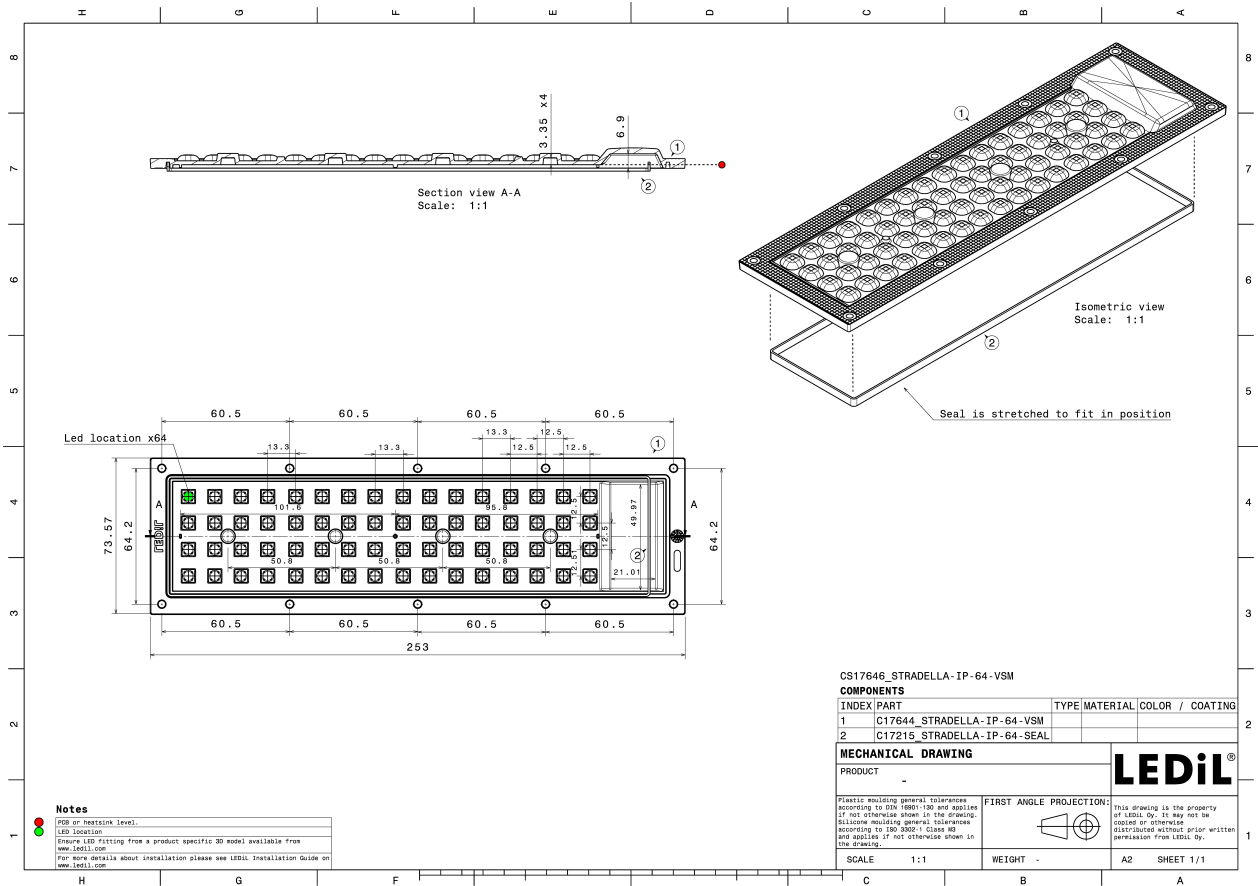

See also our general installation guide: [www.ledil.com/installation\\_guide](http://www.ledil.com/installation_guide)

#### OPTICAL RESULTS (MEASURED):

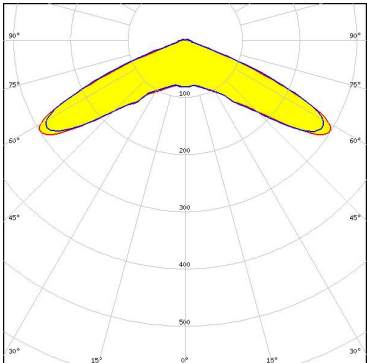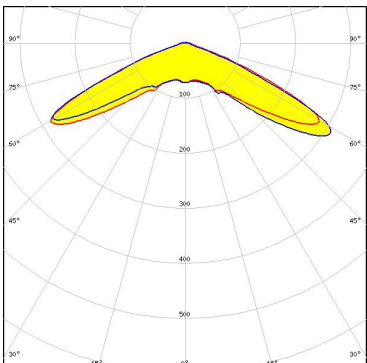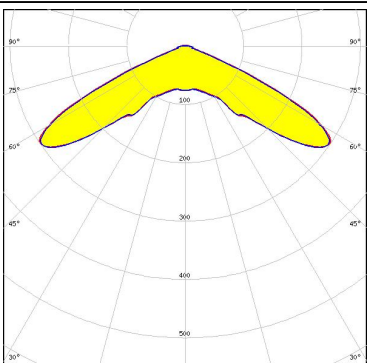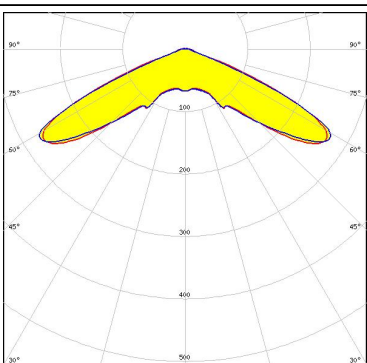
<p><b>ELECTRIO</b>  <small>THE LED &amp; LIGHTING COMPANY</small></p> <p>LED EHP-223.5x50-1604-xx-70-LS30-06-NTC            FWHM / FWTM Asymmetric            Efficiency 97 %            Peak intensity 0.5 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>	
<p><b>MST</b>   <i>Your solutions</i></p> <p>LED RecLED 223x50mm 4200lm 8x0 4x16 Opt G1            FWHM / FWTM Asymmetric            Efficiency 93 %            Peak intensity 0.6 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>	
<p><b>OSRAM</b></p> <p>LED PrevaLED Brick MP 4x16            FWHM / FWTM 129.0° / 138.0°            Efficiency 96 %            Peak intensity 0.6 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>	
<p><b>SCIOLUX</b></p> <p>LED KAAX-VB-2300-840-48            FWHM / FWTM 132.0° / 141.0°            Efficiency 92 %            Peak intensity 0.5 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>	




#### OPTICAL RESULTS (SIMULATED):




LED J Series 2835  
 FWHM / FWTM Asymmetric  
 Efficiency 92 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

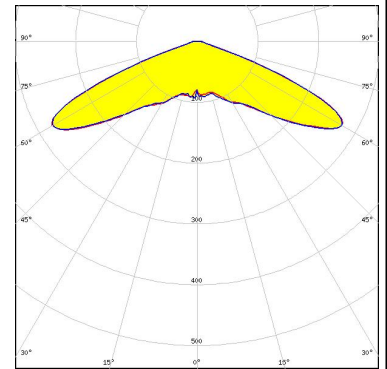


LED Duris E 2835  
 FWHM / FWTM Asymmetric  
 Efficiency 96 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

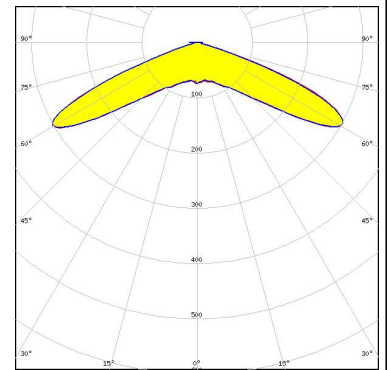

LED Duris S5 (Single chip)  
 FWHM / FWTM Asymmetric  
 Efficiency 96 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

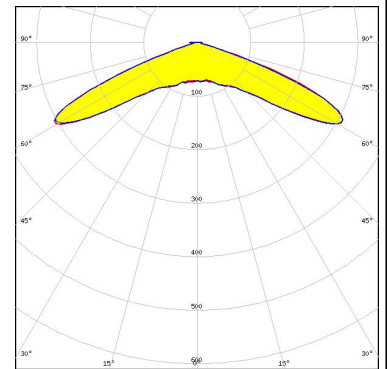


LED OSCONIQ C 3030  
 FWHM / FWTM Asymmetric  
 Efficiency 95 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

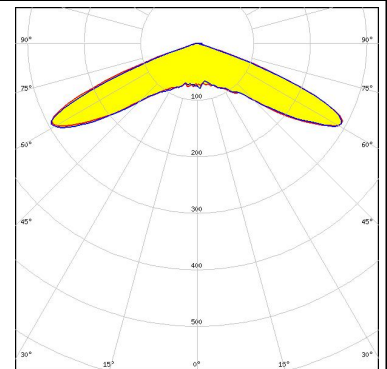

#### OPTICAL RESULTS (SIMULATED):


### PHILIPS

LED Fortimo FastFlex LED 4x16 DHE G4  
 FWHM / FWTM Asymmetric  
 Efficiency 96 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

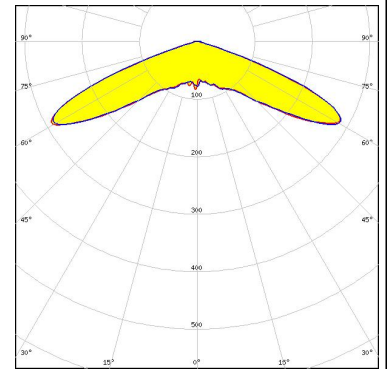


### SAMSUNG

LED HiLOM RM64 (LM301B)  
 FWHM / FWTM Asymmetric  
 Efficiency 96 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

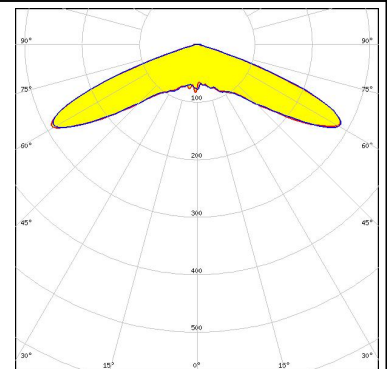


### SAMSUNG

LED LH351B  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

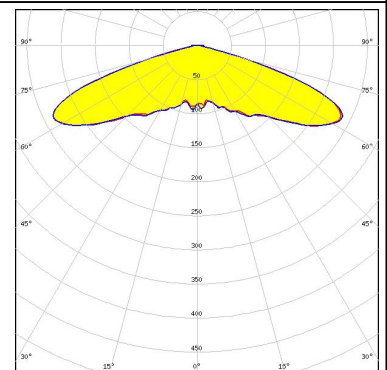

### SAMSUNG


LED LH351C  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

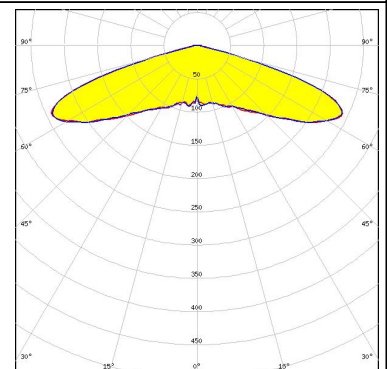

#### OPTICAL RESULTS (SIMULATED):


### SAMSUNG

LED LH351D  
FWHM / FWTM Asymmetric  
Efficiency 92 %  
Peak intensity 0.3 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

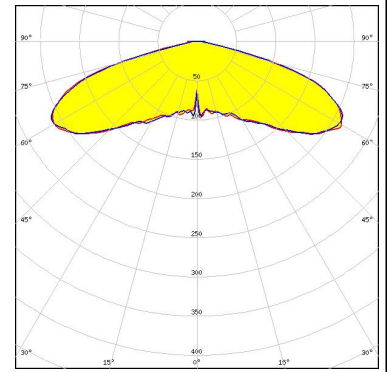

### SAMSUNG

LED LM301B  
FWHM / FWTM Asymmetric  
Efficiency 96 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

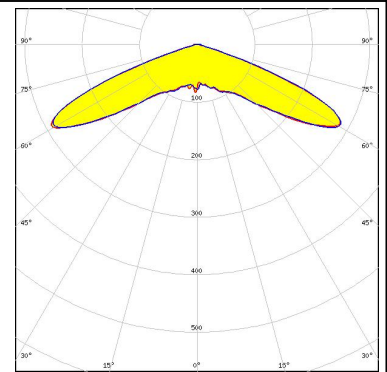

### TRIDONIC

LED RLE 4x16 4000lm MP ADV2 OTD  
FWHM / FWTM Asymmetric  
Efficiency 96 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

