G2-LAURA-SS-WAS-P

Asymmetric beam for wall-washing. Assembly with thinner white holder, installation tape and location pins.

SPECIFICATION:

Dimensions 21.6 x 21.6 mm

Height 13.1 mm

Fastening tape, pin

ROHS compliant yes 1



MATERIALS:


Component	Туре	Material	Colour	Finish
LAURA-SS-WAS	Single lens	PMMA	clear	
LAURA-LT-PIN-XP-HLD-WHT	Holder	PC	white	
ROSE-TAPE	Tape	Acrylic foam	black	

ORDERING INFORMATION:

Component		Qty in box	MOQ	MPQ	Box weight (kg)
CA13639_G2-LAURA-SS-WAS-P	Single lens	1440		180	6.0
» Box size: 451 x 254 x 152 mm					



PRODUCT DATASHEET CA13639_G2-LAURA-SS-WAS-P

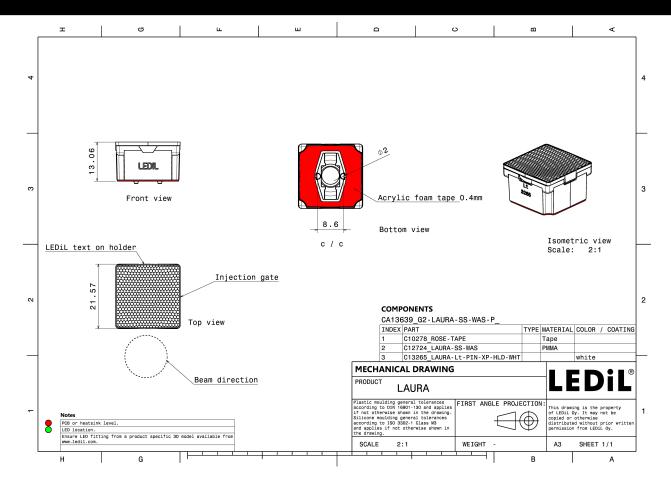

See also our general installation guide: www.ledil.com/installation_guide



OPTICAL RESULTS (MEASURED):

CREE &


LED XP-E
FWHM / FWTM Asymmetric
Efficiency 92 %
Peak intensity 11.6 cd/lm
LEDs/each optic 1
Light colour White

LUMILEDS

Required components:

LED LUXEON A
FWHM / FWTM Asymmetric
Efficiency 90 %
Peak intensity 11 cd/lm
LEDs/each optic 1
Light colour White
Required components:






*M***NICHIA**

LED NVSW219F
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 9.2 cd/lm
LEDs/each optic 1
Light colour White
Required components:






OSRAM

LED OSLON Square CSSRM2/CSSRM3

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 11.6 cd/lm
LEDs/each optic 1
Light colour White

Required components:










Efficiency 93 %
Peak intensity 10.3 cd/lm

LEDs/each optic 1

Light colour Royal Blue

Required components:




MUMILEDS

LED LUXEON C
FWHM / FWTM Asymmetric
Efficiency 90 %
Peak intensity 10.6 cd/lm
LEDs/each optic 1

Light colour White


Required components:



DESCRIPTION LUMILEDS


LED LUXEON C
FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 10.7 cd/lm
LEDs/each optic 1

Light colour Green Required components:



DESCRIPTION LUMILEDS

LED LUXEON C
FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 9.6 cd/lm
LEDs/each optic 1
Light colour Red
Required components:








LED LUXEON CZ
FWHM / FWTM Asymmetric
Efficiency 96 %
Peak intensity 16.7 cd/lm
LEDs/each optic 1

Light colour Royal Blue


Required components:



MUMILEDS

LED LUXEON CZ
FWHM / FWTM Asymmetric
Efficiency 96 %
Peak intensity 15.9 cd/lm
LEDs/each optic 1
Light colour White


Required components:



DESCRIPTION LUMILEDS

LED LUXEON CZ
FWHM / FWTM Asymmetric
Efficiency 96 %
Peak intensity 16.6 cd/lm

LEDs/each optic 1
Light colour Green
Required components:



DESCRIPTION LUMILEDS

Required components:

LED LUXEON CZ
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 14.4 cd/lm
LEDs/each optic 1
Light colour Red


25. 1200 65. 400 65. 400 75. 400 75. 400 75. 400






LED OSCONIQ P 3030 FWHM / FWTM Asymmetric Efficiency 96 % Peak intensity 15.7 cd/lm LEDs/each optic Light colour True Green

Required components:



OSRAM


LED OSCONIQ P 3030 FWHM / FWTM Asymmetric Efficiency 96 % Peak intensity 15.1 cd/lm LEDs/each optic 1 White Light colour Required components:



OSRAM Opto Semiconductor

LED OSCONIQ P 3030 FWHM / FWTM Asymmetric Efficiency 96 % Peak intensity 14.2 cd/lm LEDs/each optic 1 Light colour Blue

Required components:




OSRAM

LED OSCONIQ P 3030

FWHM / FWTM Asymmetric Efficiency 96 % Peak intensity 15.5 cd/lm LEDs/each optic 1 Red

Light colour Required components:








LED OSCONIQ P 3737 (2W version)

FWHM / FWTM Asymmetric
Efficiency 96 %
Peak intensity 11.7 cd/lm
LEDs/each optic 1
Light colour White

Required components:



SEOUL SEMICONDUCTOR

LED Z5M4
FWHM / FWTM Asymmetric
Efficiency 96 %
Peak intensity 10.5 cd/lm
LEDs/each optic 1

LEDs/each optic 1
Light colour White

Required components:

