

LEILA

Lenses for general, wall-washing and sports lighting

LEDiL's well-established LEILA family with symmetric and asymmetric beams. LEILA-G2 comes with a thinner holder design and is backwards compatible with previous generations. The wall-washing beam is designed to be used in groups to provide uniform illumination with a typical installation distance from the wall of 10-20 cm and optimal luminaire spacing of 5-15 cm.


LEILA

Ø21.6 mm lenses, optimised for 3535 and compatible with up to 5050 size LED packages



PRODUCTS:


CA14508_G2-LXP2-D

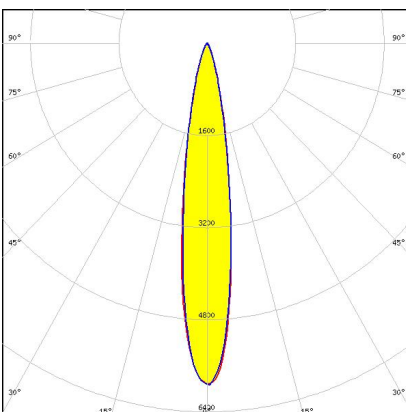

Dimensions: 21.8 mm x 21.8 mm
Height: 14.70 mm

~14° diffused spot beam with light, black holder. Assembly with installation tape.


CP11632_LXP3-D

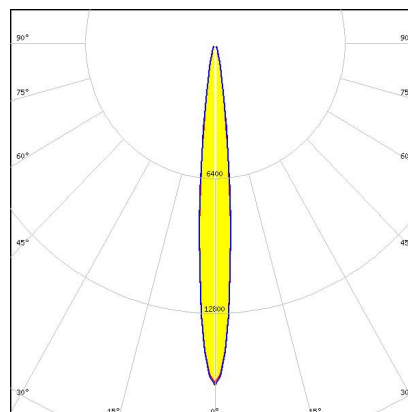

Dimensions: 21.6 mm x 21.6 mm
Height: 14.70 mm

~14° diffused spot beam optimized for CREE XP-E. 14.7 mm high assembly.

LR1-D

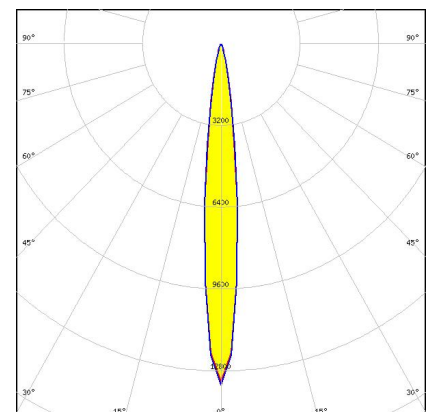


Dimensions: 21.6 mm x 21.6 mm
Height: 14.30 mm

~14° diffused spot beam optimized for LUXEON Rebel. 14.3 mm high assembly.

PRODUCTS:


CA12665_LXB2-D

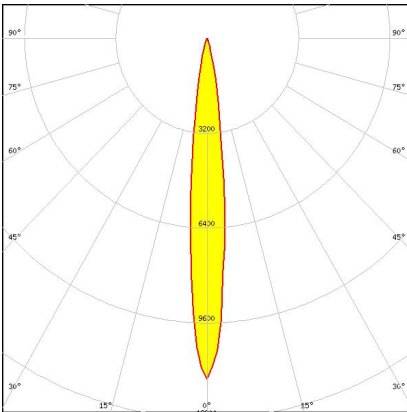

Dimensions: 21.6 mm x 21.6 mm
Height: 14.60 mm

~14° diffused spot beam optimized for CREE XB-D. 14.6 mm high assembly with installation tape.


FA10661_LXP-RS

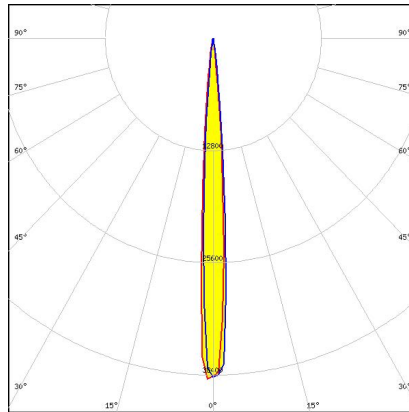

Dimensions: 21.6 mm x 21.6 mm
Height: 14.70 mm

~9.6° spot beam optimized for CREE XP-E. 14.7 mm high assembly with installation tape.


CA12264_LR2-M

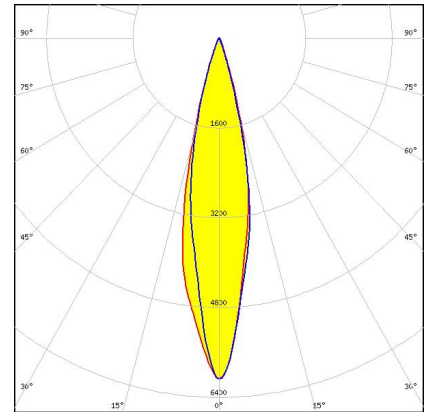

Dimensions: 21.6 mm x 21.6 mm
Height: 14.40 mm

~25° medium beam optimized for LUXEON Rebel. 14.4 mm high assembly with installation tape.


CA14507_G2-LXP2-D-P

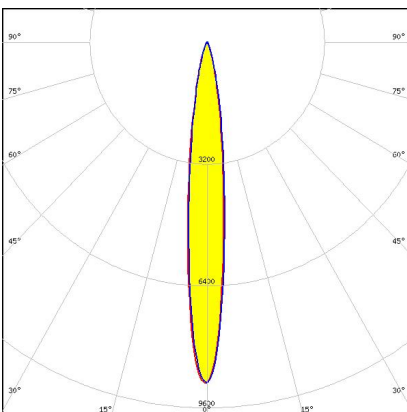

Dimensions: 21.8 mm x 21.8 mm
Height: 14.70 mm

~14° diffused spot beam with light, black holder. Assembly with location pins and installation tape.


CP11631_LXP3-RS

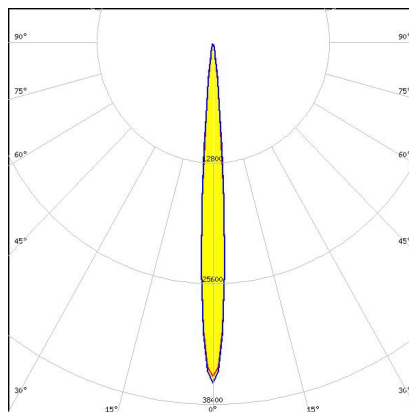

Dimensions: 21.6 mm x 21.6 mm
Height: 14.70 mm

~9.6° spot beam optimized for CREE XP-E. 14.7 mm high assembly.

LE1-RS

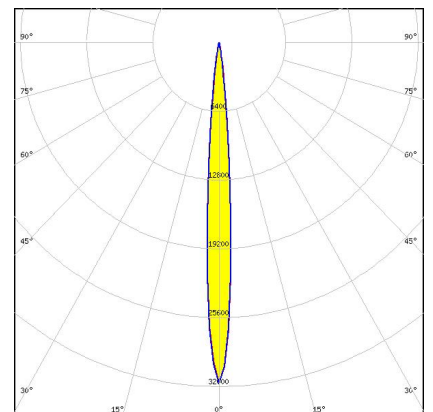


Dimensions: 21.6 mm x 21.6 mm
Height: 15.10 mm

~9.6° spot beam optimized for LedEngin LZ1(00XW00). 15.1 mm high assembly.

PRODUCTS:


CA12629_LR2-O-90

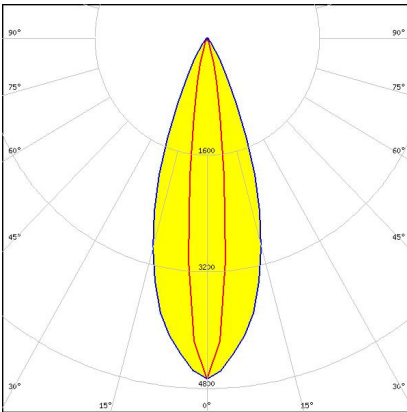

Dimensions: 21.6 mm x 21.6 mm
Height: 14.80 mm

~10° x 40° oval beam optimized for LUXEON Rebel ES. 14.8 mm high assembly with installation tape. Variant with beam direction rotated 90°.


FA10660_LXP-M

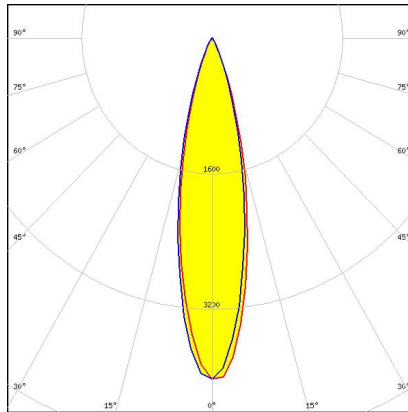

Dimensions: 21.6 mm x 21.6 mm
Height: 14.70 mm

~25° medium beam optimized for CREE XP-E. 14.7 mm high assembly with installation tape.


CA12263_LR2-D

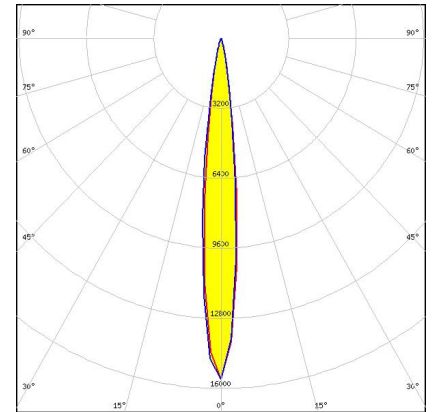

Dimensions: 21.6 mm x 21.6 mm
Height: 14.40 mm

~14° diffused spot beam optimized for LUXEON Rebel. 14.4 mm high assembly with installation tape.


CA14506_G2-LXP2-RS2

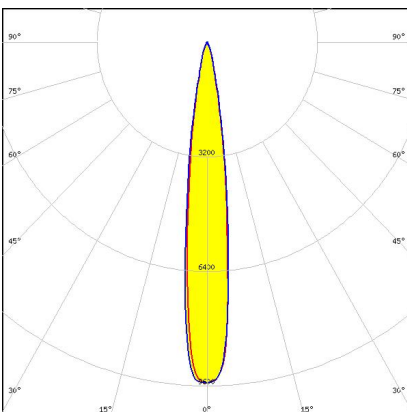

Dimensions: 21.8 mm x 21.8 mm
Height: 14.70 mm

~8.5° spot beam with light, black holder. Assembly with installation tape.

CA11484_LXP2-O-90

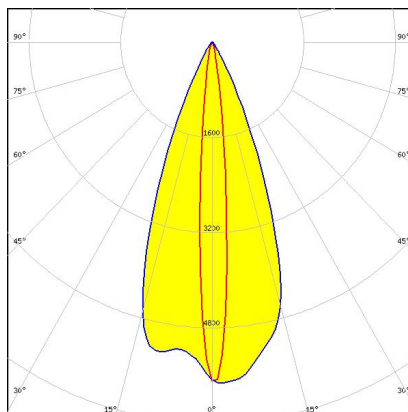

Dimensions: 21.6 mm x 21.6 mm
Height: 14.70 mm

~10° x 40° oval beam optimized for CREE XP-E. 14.7 mm high assembly with installation tape. Variant with beam direction rotated 90°.


LE1-M

Dimensions: 21.6 mm x 21.6 mm
Height: 15.10 mm

~25° medium beam optimized for LedEngin LZ1(00XW00). 15.1 mm high assembly.

PRODUCTS:


CP12416_LOS-W

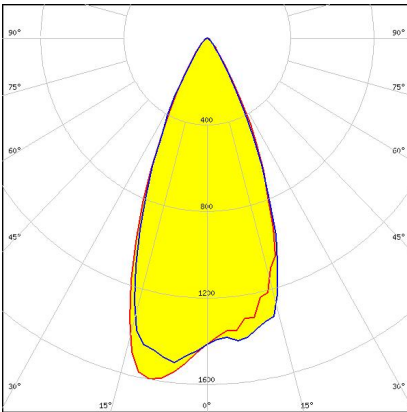

Dimensions: 21.6 mm x 21.6 mm
Height: 14.30 mm

~40° wide beam optimized for Osram
Oslon Square EC. 14.3 mm high
assembly.


FA10653_LC1-RS

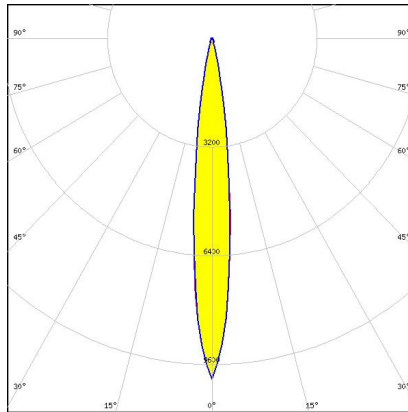

Dimensions: 21.6 mm x 21.6 mm
Height: 16.50 mm

~9.6° spot beam optimized for CREE
XR-E. 16.5 mm high assembly with
installation tape.


CA12262_LR2-RS

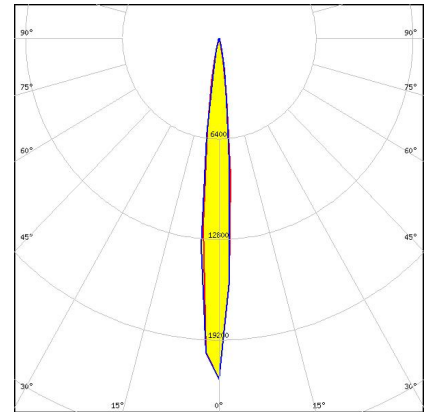

Dimensions: 21.6 mm x 21.6 mm
Height: 14.30 mm

~9.6° spot beam optimized for LUXEON
Rebel. 14.3 mm high assembly with
installation tape.


CA14505_G2-LXP2-RS2-P

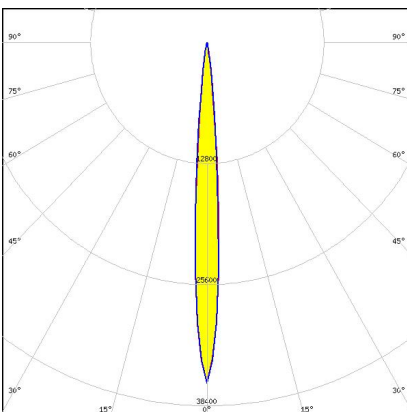

Dimensions: 21.8 mm x 21.8 mm
Height: 14.70 mm

~8.5° spot beam with light, black holder.
Assembly with location pins and
installation tape.


CA11483_LXP2-M

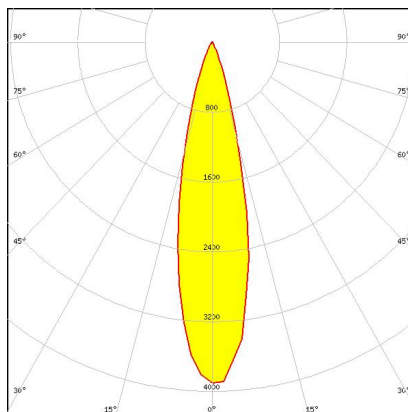

Dimensions: 21.6 mm x 21.6 mm
Height: 14.70 mm

~25° medium beam optimized for CREE
XP-E. 14.7 mm high assembly with
installation tape.

FA10753_LO2-D

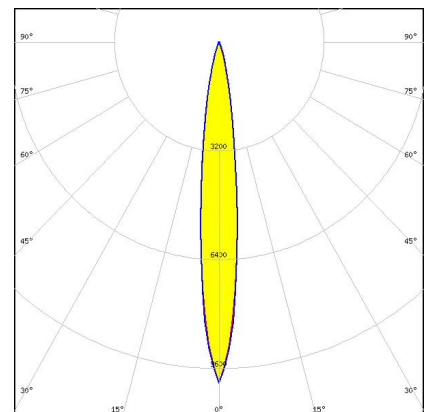


Dimensions: 21.6 mm x 21.6 mm
Height: 14.60 mm

~14° diffused spot beam optimized for
Osram Golden Dragon+. 14.6 mm high
assembly with installation tape.

PRODUCTS:


CP12415_LOS-O-90

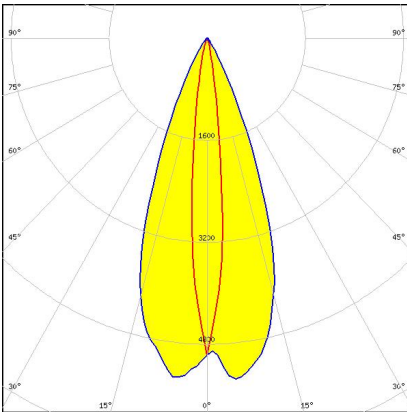

Dimensions: 21.6 mm x 21.6 mm
Height: 14.30 mm

~10° x 40° oval beam optimized for Osram Oslon Square EC. 14.3 mm high assembly. Variant with beam direction rotated 90°.


FA10652_LC1-M

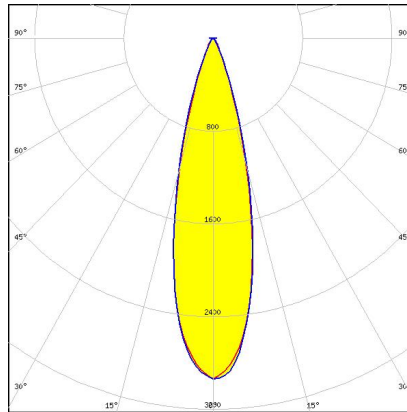

Dimensions: 21.6 mm x 21.6 mm
Height: 16.50 mm

~25° medium beam optimized for CREE XR-E. 16.5 mm high assembly with installation tape.


FA11939_LXM-M

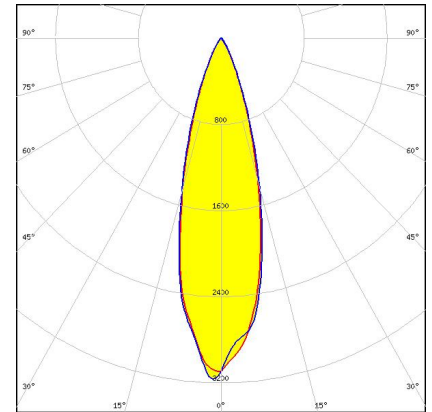

Dimensions: 21.6 mm x 21.6 mm
Height: 14.80 mm

~25° medium beam optimized for CREE XM-L. 14.8 mm high assembly with installation tape.


CA14503_G2-LXP2-RS-P

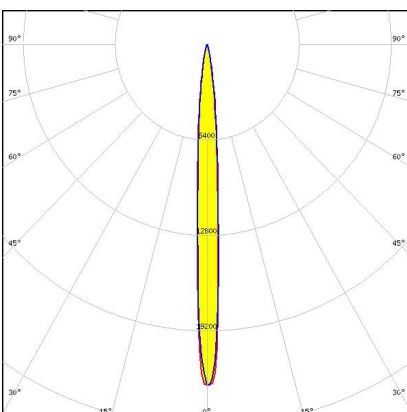

Dimensions: 21.8 mm x 21.8 mm
Height: 14.70 mm

~9.6° spot beam optimized for CREE XP-E. 14.7 mm high assembly with installation tape. Variant with thin holder with pins.


CA11482_LXP2-D

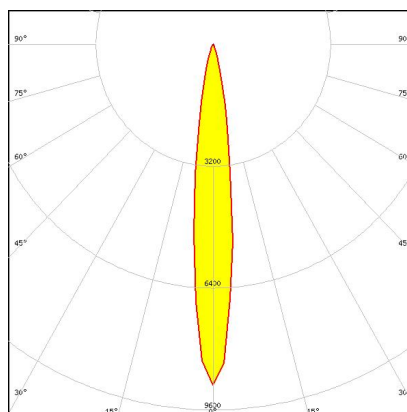

Dimensions: 21.6 mm x 21.6 mm
Height: 14.70 mm

~14° diffused spot beam optimized for CREE XP-E. 14.7 mm high assembly with installation tape.

FA10751_LO2-RS

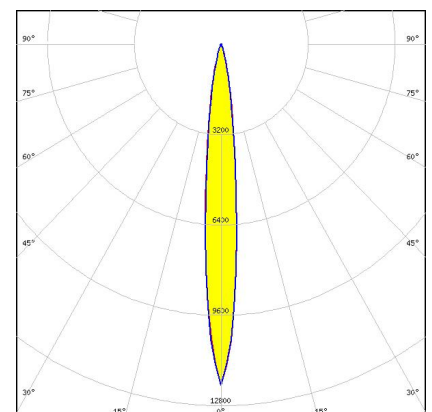


Dimensions: 21.6 mm x 21.6 mm
Height: 14.60 mm

~9.6° spot beam optimized for Osram Golden Dragon+. 14.6 mm high assembly with installation tape.

PRODUCTS:


CP12414_LOS-M

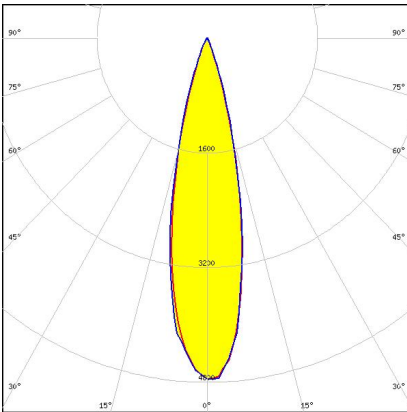

Dimensions: 21.6 mm x 21.6 mm
Height: 14.30 mm

~25° medium beam optimized for Osram
Oslon Square EC. 14.3 mm high
assembly.


CA16435_LXP2-SS-WAS

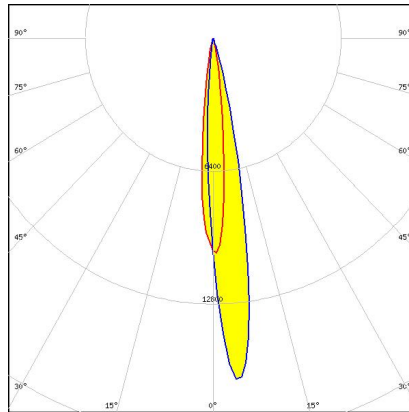

Dimensions: 21.6 mm x 21.6 mm
Height: 14.72 mm

Asymmetric beam. Assembly with
installation tape.


FA10650_LM1-D

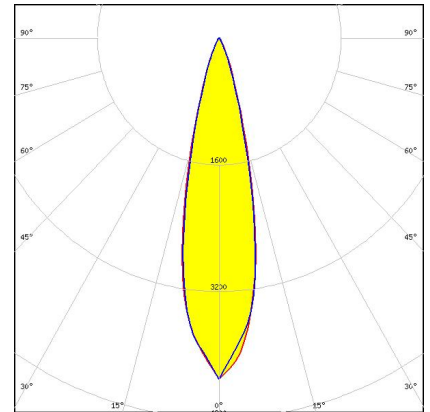

Dimensions: 21.6 mm x 21.6 mm
Height: 14.04 mm

~14° diffused spot beam optimized for
CREE MC-E. 14.04 mm high assembly
with installation tape.


FA11937_LXM-RS

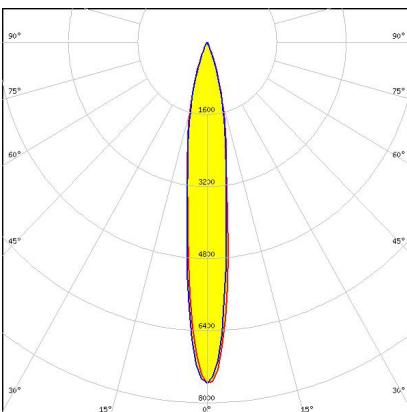

Dimensions: 21.6 mm x 21.6 mm
Height: 14.80 mm

~9.6° spot beam optimized for CREE
XM-L. 14.8 mm high assembly with
installation tape.


CA14392_LXP2-O-WAS

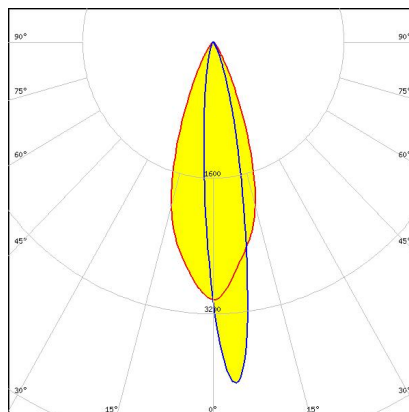

Dimensions: 21.6 mm x 21.6 mm
Height: 14.60 mm

Asymmetric beam for wall-washing and
optimized for CREE XP-E. 14.6 mm high
assembly with installation tape.

CA11481_LXP2-RS

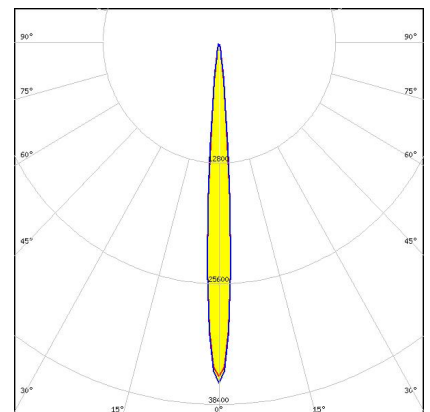


Dimensions: 21.6 mm x 21.6 mm
Height: 14.70 mm

~9.6° spot beam optimized for CREE
XP-E. 14.7 mm high assembly with
installation tape.

PRODUCTS:


FA10750_LO2-M

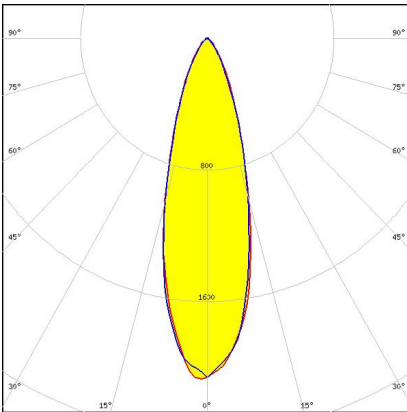

Dimensions: 21.6 mm x 21.6 mm
Height: 14.60 mm

~25° medium beam optimized for Osram Golden Dragon+. 14.6 mm high assembly with installation tape.


CP12413_LOS-D

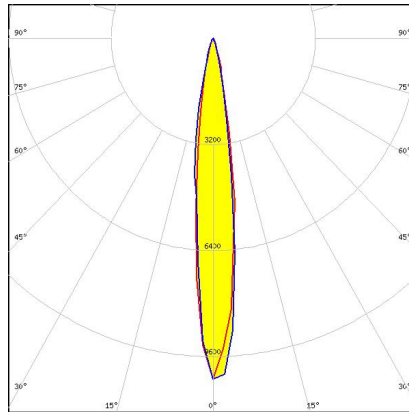

Dimensions: 21.6 mm x 21.6 mm
Height: 14.30 mm

~14° diffused spot beam optimized for Osram Oslon Square EC. 14.3 mm high assembly.


CA15772_G2-LXP2-W-P

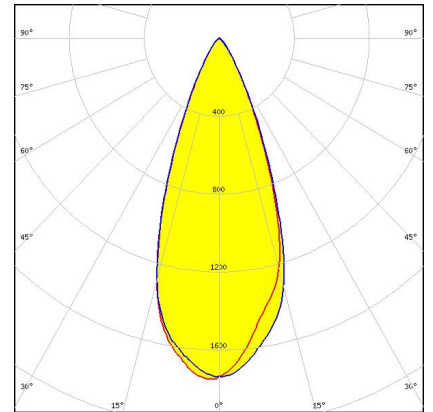

Dimensions: 21.8 mm x 21.8 mm
Height: 14.70 mm

~40° wide beam with light, black holder. Assembly with location pins and installation tape.


FA10614_LM1-M

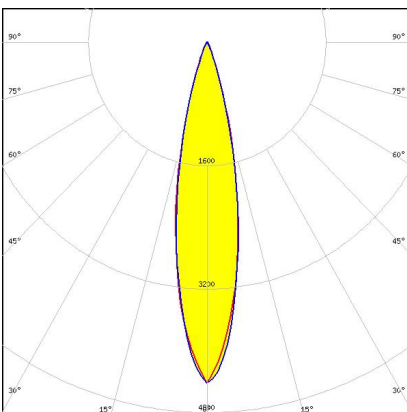

Dimensions: 21.6 mm x 21.6 mm
Height: 14.04 mm

~25° medium beam optimized for CREE MC-E. 14.04 mm high assembly with installation tape.


CA11931_LR2-M

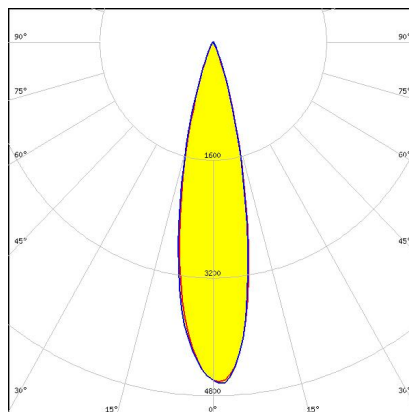

Dimensions: 21.6 mm x 21.6 mm
Height: 14.80 mm

~25° medium beam optimized for LUXEON Rebel ES. 14.8 mm high assembly with installation tape.

CP13059_LOS-RS2

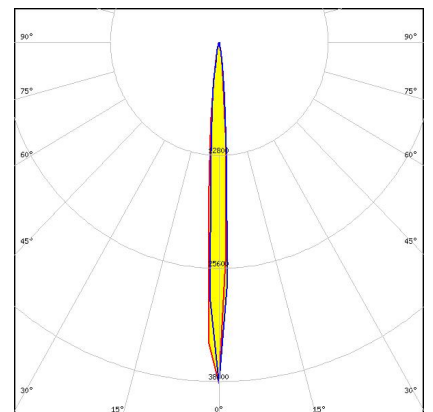


Dimensions: 21.6 mm x 21.6 mm
Height: 14.30 mm

~8.5° spot beam optimized for Osram Oslon Square EC. 14.3 mm high assembly.

PRODUCTS:


FA11450_LXP-M2

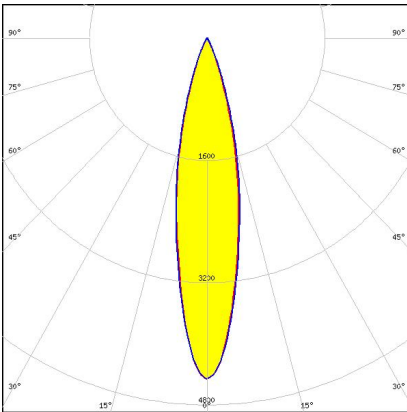

Dimensions: 21.6 mm x 21.6 mm
Height: 14.70 mm

~30° medium beam optimized for CREE XP-E. 14.7 mm high assembly with installation tape.


FA10698_LN2-REC

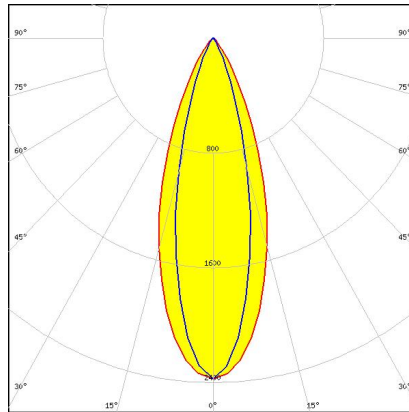

Dimensions: 21.6 mm x 21.6 mm
Height: 13.50 mm

~35° x 25° rectangular beam optimized for Nichia NS6x83. 13.3 mm high assembly with installation tape.


CP12412_LOS-RS

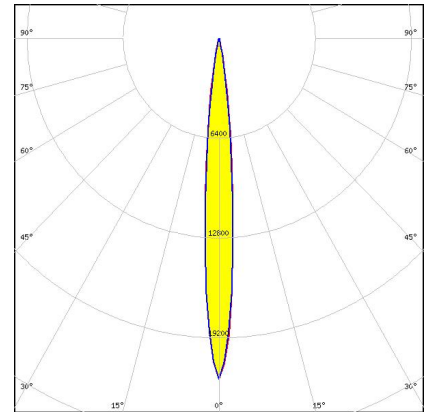

Dimensions: 21.6 mm x 21.6 mm
Height: 14.30 mm

~9.6° spot beam optimized for Osram Oslon Square EC. 14.3 mm high assembly.


CA14512_G2-LXP2-O-90

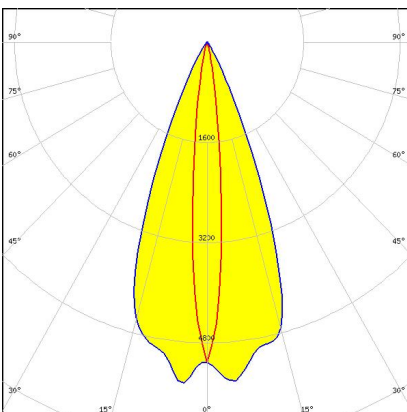

Dimensions: 21.8 mm x 21.8 mm
Height: 14.70 mm

~10° x 40° oval beam optimized for CREE XP-E. 14.7 mm high assembly with installation tape. Variant with beam direction rotated 90°. Variant with thin holder.


FA10613_LM1-RS

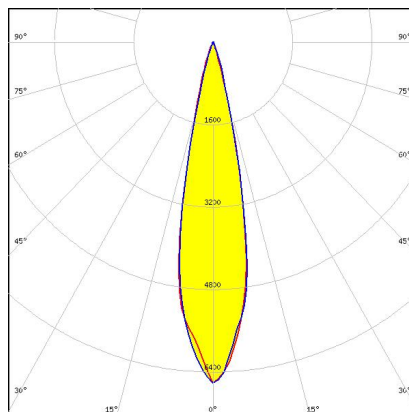

Dimensions: 21.6 mm x 21.6 mm
Height: 14.04 mm

~20° spot beam optimized for CREE MC-E. 14.04 mm high assembly with installation tape.

CA11930_LR2-D

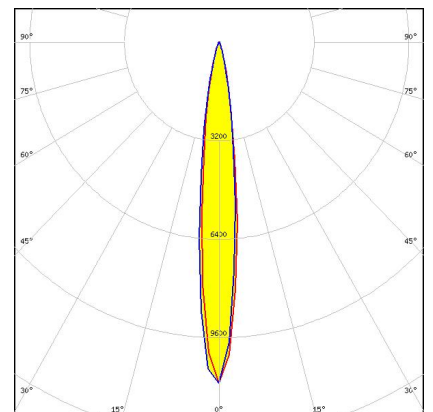


Dimensions: 21.6 mm x 21.6 mm
Height: 14.80 mm

~14° diffused spot beam optimized for LUXEON Rebel ES. 14.8 mm high assembly with installation tape.

PRODUCTS:

CP12817_LXP3-RS2

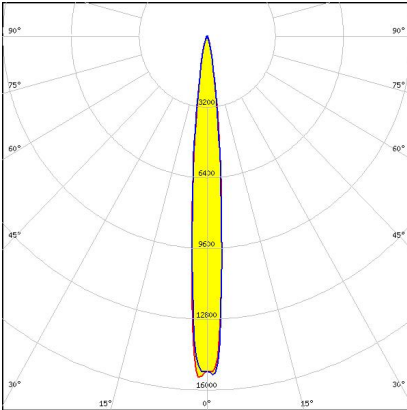

Dimensions: 21.6 mm x 21.6 mm
Height: 14.70 mm


~8.5° spot beam optimized for CREE
XP-E. 14.7 mm high assembly.

CA11136_LO2-W

Dimensions: 21.6 mm x 21.6 mm
Height: 13.90 mm

~40° wide beam optimized for Osram
Golden Dragon+. 13.9 mm high
assembly with installation tape.


FA10697_LN2-M

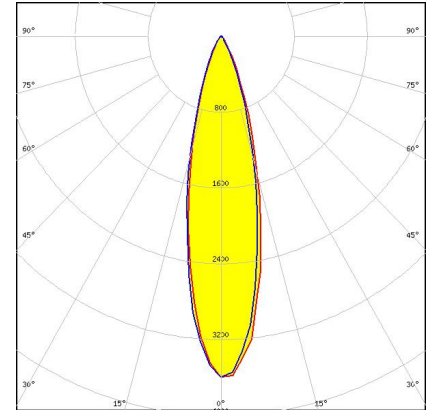

Dimensions: 21.6 mm x 21.6 mm
Height: 13.50 mm

~25° medium beam optimized for Nichia
NS6x83. 13.3 mm high assembly with
installation tape.


CP12395_LXP3-W

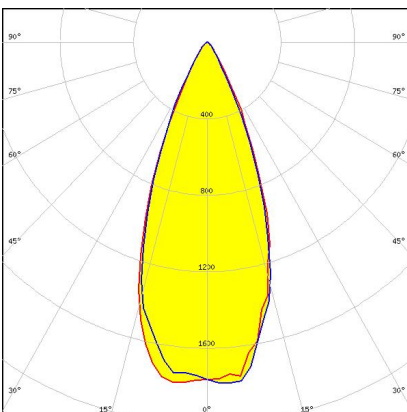

Dimensions: 21.6 mm x 21.6 mm
Height: 14.70 mm

~40° wide beam optimized for CREE
XP-E. 14.7 mm high assembly.


CA14511_G2-LXP2-O-90-P

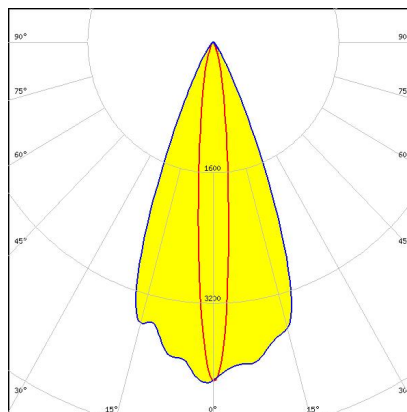

Dimensions: 21.8 mm x 21.8 mm
Height: 14.70 mm

~10° x 40° oval beam optimized for
CREE XP-E. 14.7 mm high assembly
with installation tape. Variant with beam
direction rotated 90°. Variant with thin
holder with pins.

CA11929_LR2-RS

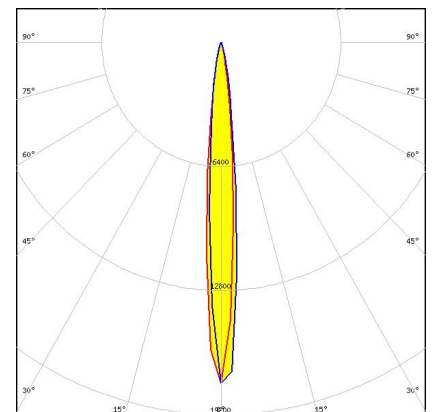


Dimensions: 21.6 mm x 21.6 mm
Height: 14.80 mm

~9.6° spot beam optimized for LUXEON
Rebel ES. 14.8 mm high assembly with
installation tape.

PRODUCTS:


FA11116_LXP-O-90

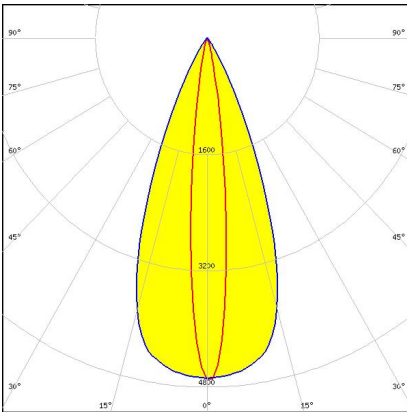

Dimensions: 21.6 mm x 21.6 mm
Height: 14.70 mm

~10° x 40° oval beam optimized for CREE XP-E. 14.7 mm high assembly with installation tape.


CA12816_LXP2-RS2

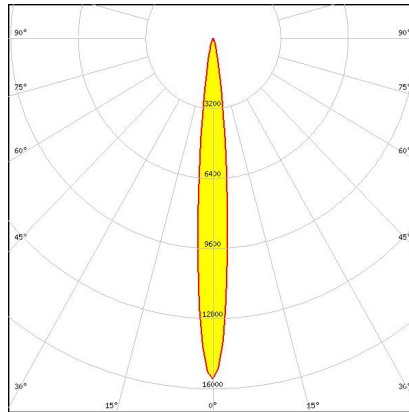

Dimensions: 21.6 mm x 21.6 mm
Height: 14.70 mm

~8.5° spot beam optimized for CREE XP-E. 14.7 mm high assembly with installation tape.


FA10696_LN2-RS

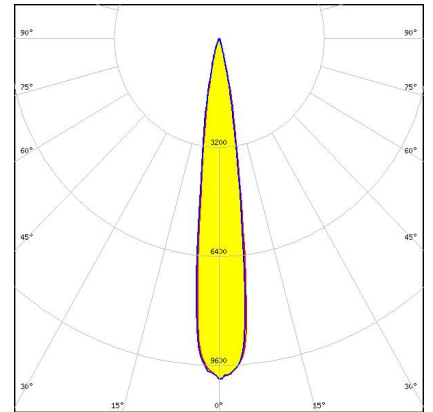

Dimensions: 21.6 mm x 21.6 mm
Height: 13.50 mm

~9.6° spot beam optimized for Nichia NS6x83. 13.3 mm high assembly with installation tape.


CA12394_LR2-W

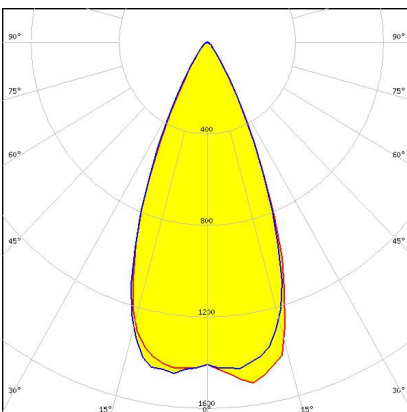

Dimensions: 21.6 mm x 21.6 mm
Height: 14.80 mm

~40° wide beam optimized for LUXEON Rebel ES. 14.8 mm high assembly with installation tape.


CA14510_G2-LXP2-M

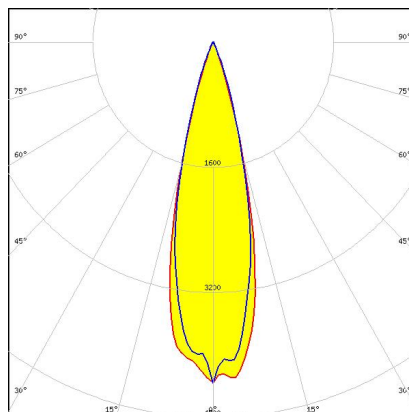

Dimensions: 21.8 mm x 21.8 mm
Height: 14.70 mm

~20° medium beam with light, black holder. Assembly with installation tape.

FA11894_LM1-W

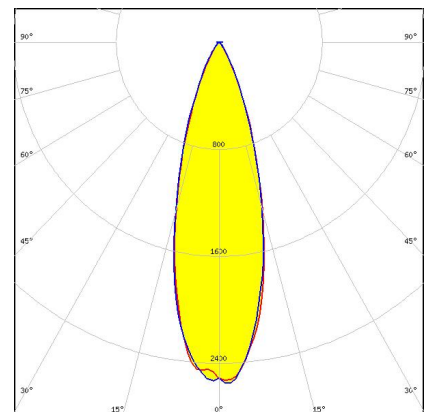


Dimensions: 21.6 mm x 21.6 mm
Height: 14.04 mm

~40° wide beam optimized for CREE MC-E. 14.04 mm high assembly with installation tape.

PRODUCTS:


LR1-W

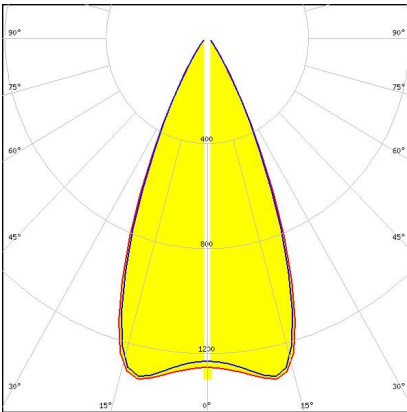

Dimensions: 21.6 mm x 21.6 mm
Height: 14.30 mm

~40° wide beam optimized for LUXEON Rebel. 14.3 mm high assembly.


CA12667_LXB2-W

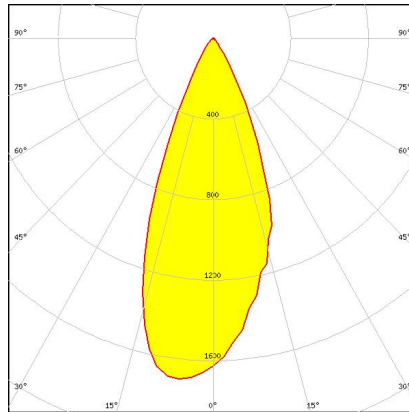

Dimensions: 21.6 mm x 21.6 mm
Height: 14.60 mm

~40° wide beam optimized for CREE XB-D. 14.6 mm high assembly with installation tape.


FA10695_LN2-D

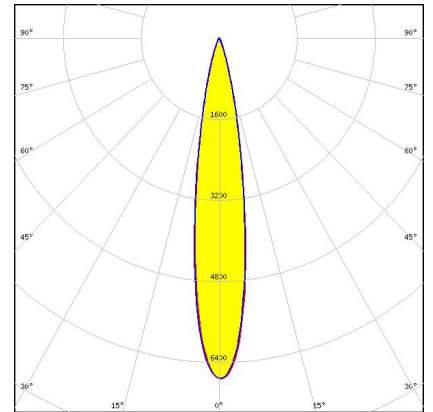

Dimensions: 21.6 mm x 21.6 mm
Height: 13.50 mm

~14° diffused spot beam optimized for Nichia NS6x83. 13.3 mm high assembly with installation tape.


CA12393_LR2-W

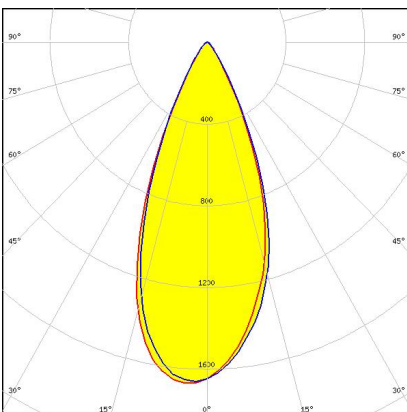

Dimensions: 21.6 mm x 21.6 mm
Height: 14.50 mm

~40° wide beam optimized for LUXEON Rebel. 14.5 mm high assembly with installation tape.


CA14509_G2-LXP2-M-P

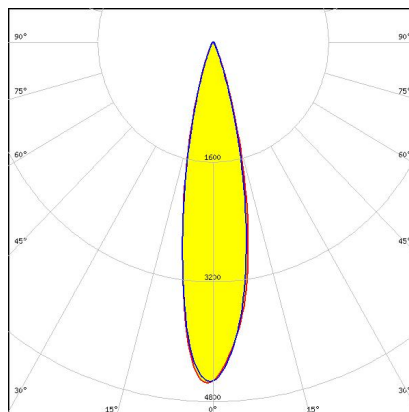

Dimensions: 21.8 mm x 21.8 mm
Height: 14.70 mm

~20° medium beam with light, black holder. Assembly with location pins and installation tape.

FA11739_LXP-RS2

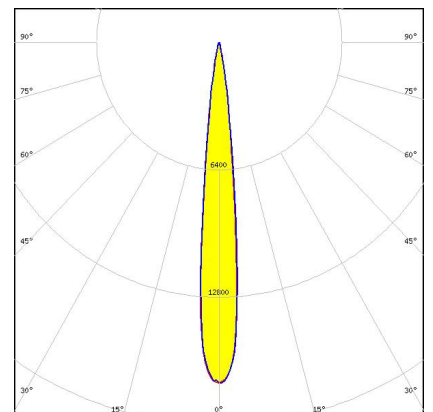


Dimensions: 21.6 mm x 21.6 mm
Height: 14.70 mm

~8.5° spot beam optimized for CREE XP-E. 14.7 mm high assembly with installation tape.

PRODUCTS:


FA10832_LXP-W

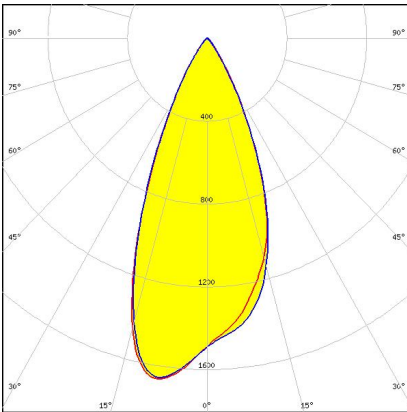

Dimensions: 21.6 mm x 21.6 mm
Height: 14.70 mm

~40° wide beam optimized for CREE
XP-E. 14.7 mm high assembly with
installation tape.


CA12666_LXB2-M

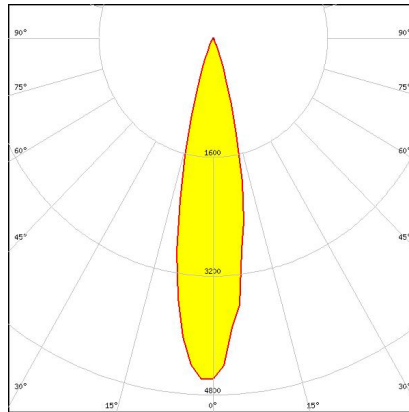

Dimensions: 21.6 mm x 21.6 mm
Height: 14.60 mm

~25° medium beam optimized for CREE
XB-D. 14.6 mm high assembly with
installation tape.


FA10663_LXP-D

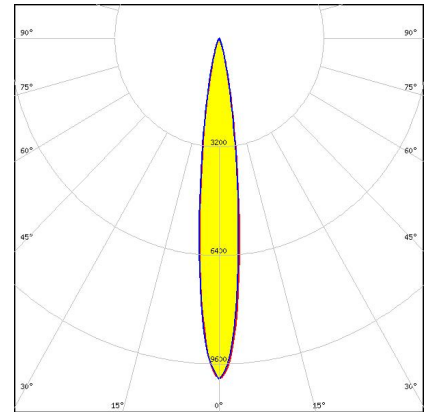

Dimensions: 21.6 mm x 21.6 mm
Height: 14.70 mm

~14° diffused spot beam optimized for
CREE XP-E. 14.7 mm high assembly
with installation tape.

CA12392_LXP2-W

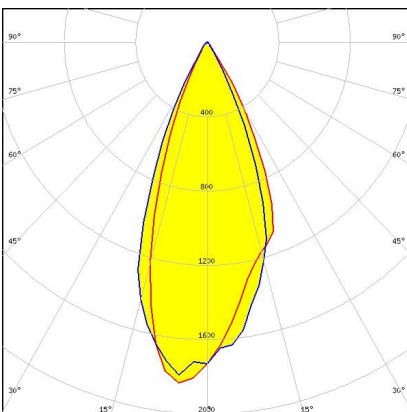

Dimensions: 21.6 mm x 21.6 mm
Height: 14.70 mm

~40° wide beam optimized for CREE
XP-E. 14.7 mm high assembly with
installation tape.