

Features

- 1000 V / 1 A rating
- Tiny DFN3538 package (3.5 x 3.8 mm)
- Low profile (1.15 mm)
- High thermal dissipation
- RoHS* and Halogen Free**

Applications

- USB wall sockets
- AC/DC power supplies
- Battery chargers
- Medical equipment (low/medium risk)***
- Industrial equipment


CD-MMBL110S Surface Mount Bridge Rectifier Diode

General Information

Manufacturers of consumer electronics, portable communication, medical and industrial equipment are challenging the semiconductor industry to develop innovated packaging technologies and component miniaturization.

Bourns® CD-MMBL110S Bridge Rectifier is housed in a tiny DFN3538 package (3.5 mm x 3.8 mm x 1.15 mm), minimizing PCB real estate and fitting into designs with height constraints. Besides the benefit of a compact footprint compared to a conventional gull-wing package, its flat no-leads package construction features superior coplanarity, improved solder joints, and virtually eliminates short circuit conditions during manufacturing.

Bourns® CD-MMBL110S Bridge Rectifier is rated at 1000 V / 1 A with enhanced thermal dissipation capability¹.



Additional Information

Click these links for more information:



Absolute Maximum Ratings (@ T_A = 25 °C Unless Otherwise Noted)

Parameter	Symbol	CD-MMBL110S	Unit
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	1000	V
Maximum Average Forward Rectified Current (T _A = 55 °C)	I _{F(AV)}	1	A
Peak Forward Surge Current 8.3 ms Single Half Sine-Wave Superimposed on Rated Load (JEDEC Method)	I _{FSM}	30	A
Operating Temperature Range	T _J	-55 to +150	°C
Storage Temperature Range	T _{STG}	-55 to +150	°C

Electrical Characteristics (@ T_A = 25 °C Unless Otherwise Noted)

Parameter	Symbol	CD-MMBL110S				Unit
		Test Conditions	Min.	Typ.	Max.	
Instantaneous Forward Voltage	V _F	I _F = 0.4 A		0.9	1.0	V
		I _F = 1.0 A			1.1	
Repetitive Peak Reverse Current	I _{RRM}	V _R = V _{RRM}	T _A = +25 °C	0.08	5.0	μA
			T _A = +125 °C			100
Junction Capacitance	C _J	V _R = 4 V, f = 1.0 MHz		9		pF
Thermal Resistance, Junction to Air ¹	R _{θJA}			130		°C / W
Thermal Resistance, Junction to Case ¹	R _{θJC}			40		°C / W

NOTE 1: Measured when mounted on PCB with 1.3 mm x 1.3 mm (0.05 inch x 0.05 inch) copper pad areas.



WARNING Cancer and Reproductive Harm

www.P65Warnings.ca.gov

*RoHS Directive 2015/863, Mar 31, 2015 and Annex.

**Bourns considers a product to be "halogen free" if (a) the Bromine (Br) content is 900 ppm or less; (b) the Chlorine (Cl) content is 900 ppm or less; and (c) the total Bromine (Br) and Chlorine (Cl) content is 1500 ppm or less.

***Bourns® products have not been designed for and are not intended for use in "lifesaving," "life-critical" or "life-sustaining" applications nor any other applications where failure or malfunction of the Bourns® product may result in personal injury or death. See Legal Disclaimer Notice www.bourns.com/docs/legal/disclaimer.pdf


Specifications are subject to change without notice. Users should verify actual device performance in their specific applications. The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.

CD-MMBL110S Surface Mount Bridge Rectifier Diode




Rating and Characteristic Curves


Forward Current Derating Curve

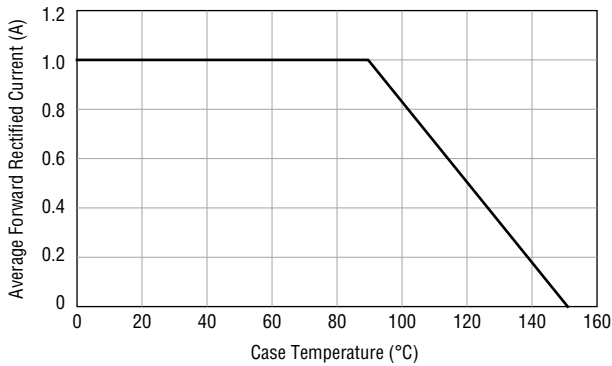


Maximum Non-Repetitive Peak Forward Surge Current

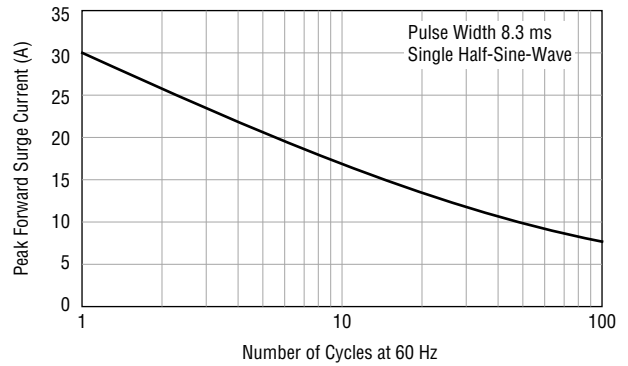


Forward Characteristics

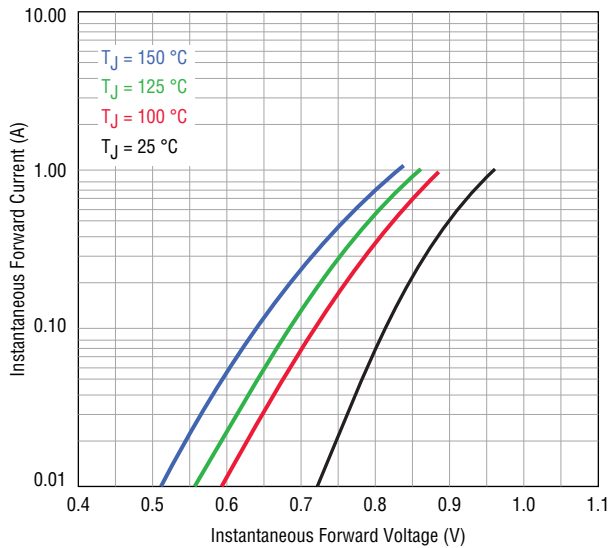

Reverse Characteristics

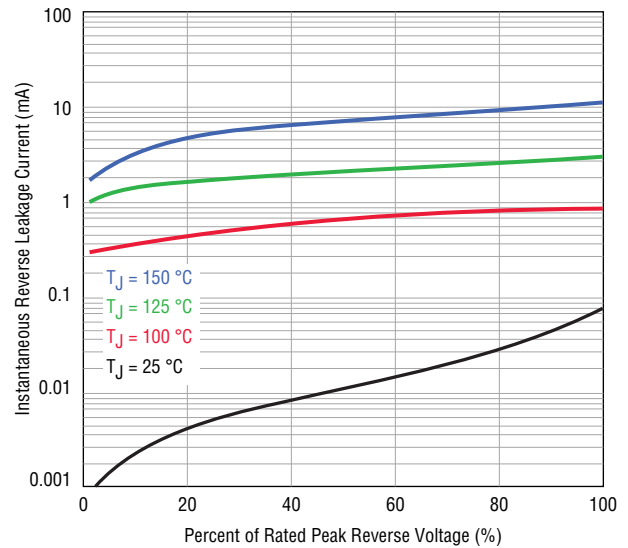

Typical Junction Capacitance

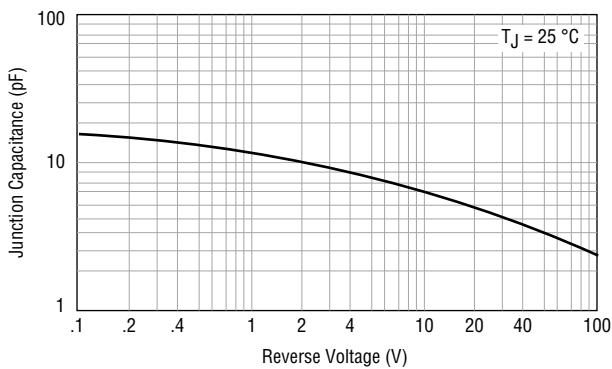



Specifications are subject to change without notice. Users should verify actual device performance in their specific applications. The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.

CD-MMBL110S Surface Mount Bridge Rectifier Diode




Product Dimensions


Package: DFN3538

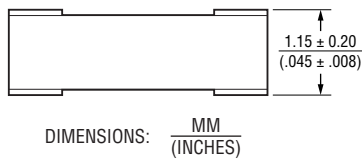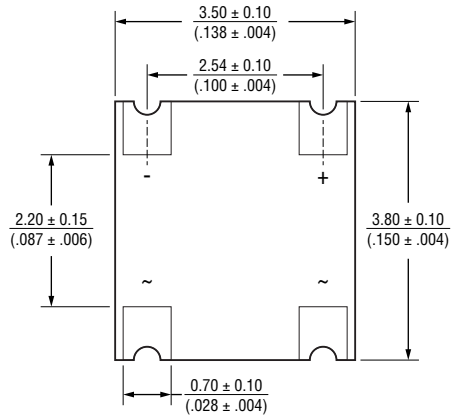

Typical Part Marking




Recommended Footprint



DIMENSIONS: $\frac{\text{MM}}{\text{(INCHES)}}$

How to Order

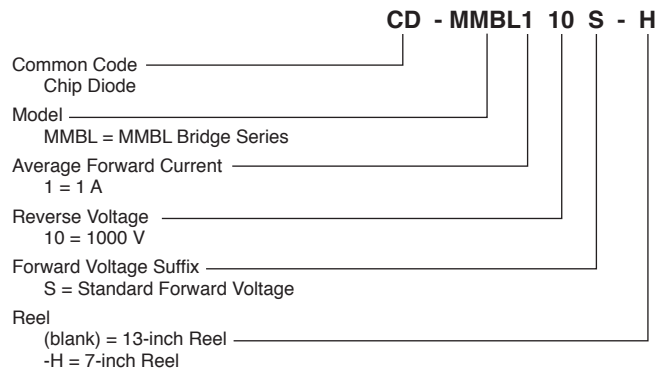

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.


The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.

CD-MMBL110S Surface Mount Bridge Rectifier Diode

BOURNS®

Packaging Information

The surface mount product is packaged in a 12 mm x 8 mm tape and reel format per EIA-481 standard.

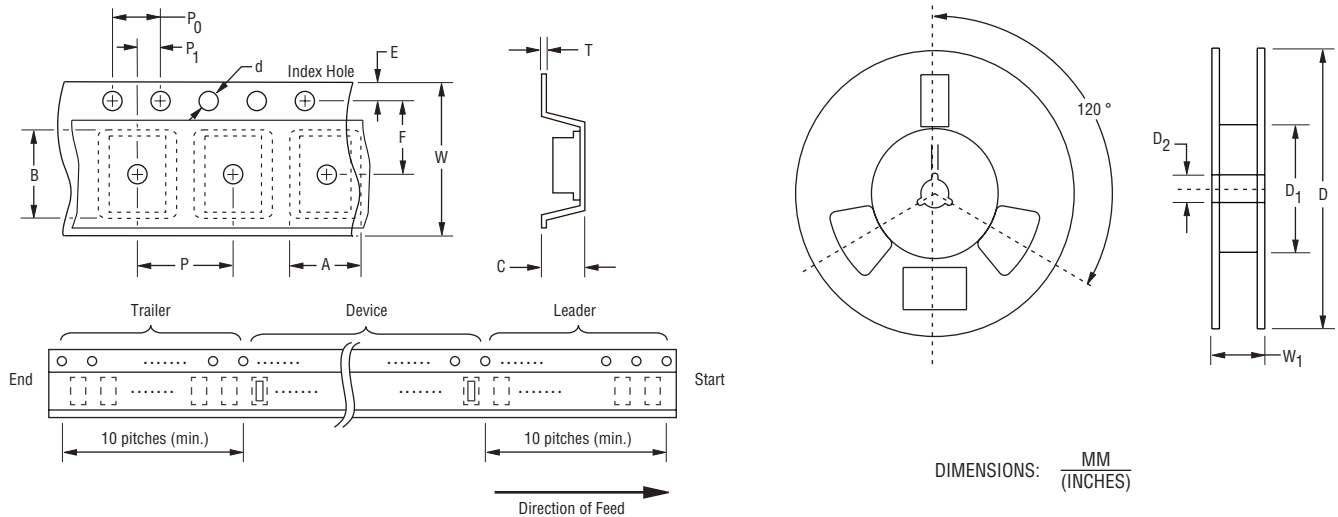

Item	Symbol	CD-MMBL110S	CD-MMBL110S-H
Carrier Width	A	5.90 ± 0.10 (0.232 ± 0.004)	3.78 ± 0.10 (0.149 ± 0.004)
Carrier Length	B	6.50 ± 0.10 (0.256 ± 0.004)	4.16 ± 0.10 (0.164 ± 0.004)
Carrier Depth	C	1.50 ± 0.10 (0.059 ± 0.004)	1.52 ± 0.10 (0.060 ± 0.004)
Sprocket Hole	d	1.55 ± 0.05 (0.061 ± 0.002)	1.55 ± 0.05 (0.061 ± 0.002)
Reel Outside Diameter	D	330 (12.992)	178 ± 2.0 (7.008 ± 0.079)
Reel Inner Diameter	D ₁	50.0 (1.969) MIN.	50.0 (1.969) MIN.
Feed Hole Diameter	D ₂	13.0 ± 0.20 (0.512 ± 0.008)	13.0 ± 0.5 (0.512 ± 0.020)
Sprocket Hole Position	E	1.75 ± 0.10 (0.069 ± 0.004)	1.75 ± 0.10 (0.069 ± 0.004)
Punch Hole Position	F	5.50 ± 0.05 (0.217 ± 0.002)	5.50 ± 0.05 (0.217 ± 0.002)
Punch Hole Pitch	P	8.00 ± 0.10 (0.315 ± 0.004)	8.00 ± 0.10 (0.315 ± 0.004)
Sprocket Hole Pitch	P ₀	4.00 ± 0.10 (0.157 ± 0.004)	4.00 ± 0.10 (0.157 ± 0.004)
Embossment Center	P ₁	2.00 ± 0.05 (0.079 ± 0.002)	2.00 ± 0.05 (0.079 ± 0.002)
Overall Tape Thickness	T	0.20 ± 0.10 (0.008 ± 0.004)	0.23 ± 0.10 (0.009 ± 0.004)
Tape Width	W	12.00 ± 0.20 (0.472 ± 0.008)	12.0 ± 0.30 (0.472 ± 0.012)
Reel Width	W ₁	18.7 (0.736) MAX.	18.7 (0.736) MAX.
Quantity per Reel	--	5,000	1,400

BOURNS®

Asia-Pacific:

Tel: +886-2 2562-4117

Email: asiacus@bourns.com

Europe:

Tel: +36 88 885 877

Email: eurocus@bourns.com

The Americas:

Tel: +1-951 781-5500

Email: americus@bourns.com

www.bourns.com

10/21

Specifications are subject to change without notice. Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.