


Features

- ▶ Low conversion loss
- ▶ High isolation
- ▶ Wide IF bandwidth
- ▶ Passive double balanced topology
- ▶ Small die size

Description

The CMD177 is a general purpose double balanced mixer die that can be used for up- and downconverting applications between 6 and 14 GHz. The CMD177 has very high isolation to both the RF and IF ports due to the optimized balun structures, and can operate with an LO drive level as low as +9 dBm. The CMD177 can easily be configured as an image reject mixer or single sideband modulator with external hybrids and power splitters.

Functional Block Diagram

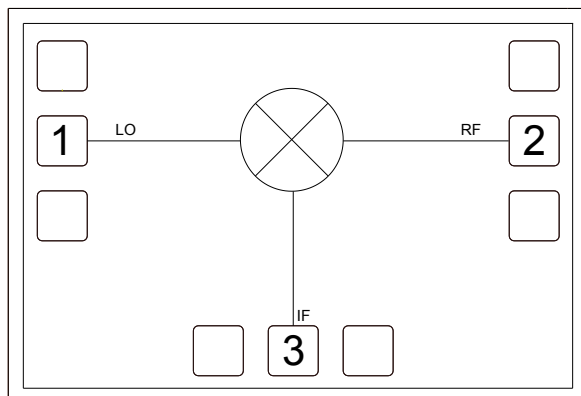

Electrical Performance – IF = 100 MHz, LO = +13 dBm , T_A = 25 °C, F = 10 GHz

Parameter	Min	Typ	Max	Units
Frequency Range, RF & LO	6 – 14			GHz
Frequency Range, IF	DC		5	GHz
Conversion Loss		6.5		dB
LO to RF Isolation		43		dB
LO to IF Isolation		37		dB
RF to IF Isolation		22		dB
Input P1dB		9.5		dBm

Unless otherwise noted, all measurements performed as a downconverter, IF = 100 MHz

Specifications

Absolute Maximum Ratings

Parameter	Rating
RF / IF Input Power	+25 dBm
LO Drive	+25 dBm
Operating Temperature	-40 to 85 °C
Storage Temperature	-55 to 150 °C
Thermal resistance, Θ_{JC}	331.4 °C / W

Operation of this device outside the maximum ratings may cause permanent damage.

Electrical Specifications – IF = 100 MHz, LO = +13 dBm, T_A = 25 °C


Parameter	Min	Typ	Max	Min	Typ	Max	Units
Frequency Range, RF & LO	8 – 12			6 – 14			GHz
Frequency Range, IF	DC		5	DC		5	GHz
Conversion Loss		6.5	8		7	10	dB
Noise Figure (SSB)		6.5	8		7	10	dB
LO to RF Isolation	37	43		34	43		dB
LO to IF Isolation	28	37		28	37		dB
RF to IF Isolation	15	22		12	22		dB
Input P1dB		9.5			9.5		dBm
Input IP3		16			16		dBm

Unless otherwise noted, all measurements performed as a downconverter, IF = 100 MHz


ver 1.1 0717

Typical Performance

Conversion Gain vs. Temperature, LO = +13 dBm, IF = 100 MHz USB

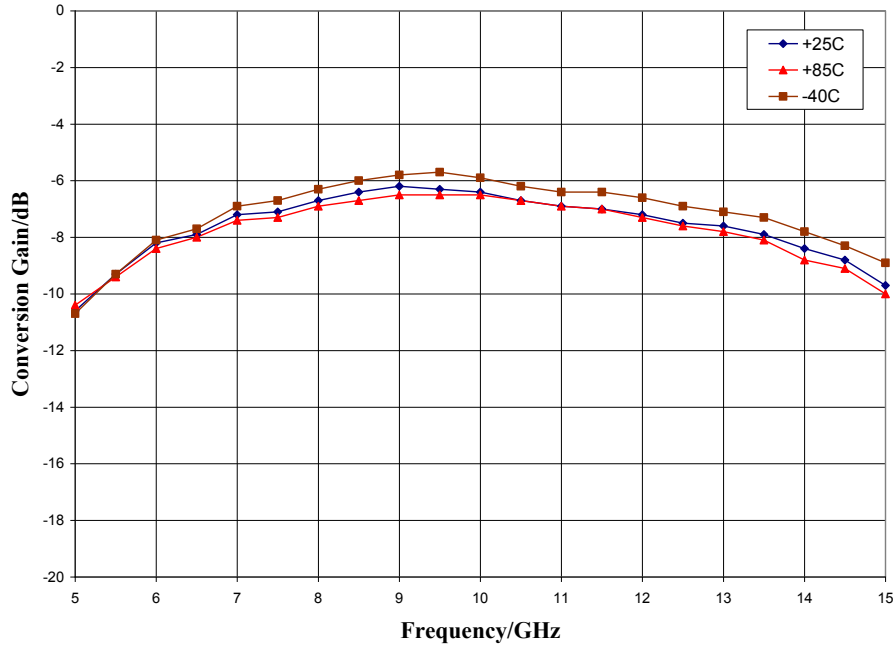


Isolation, LO = +13 dBm

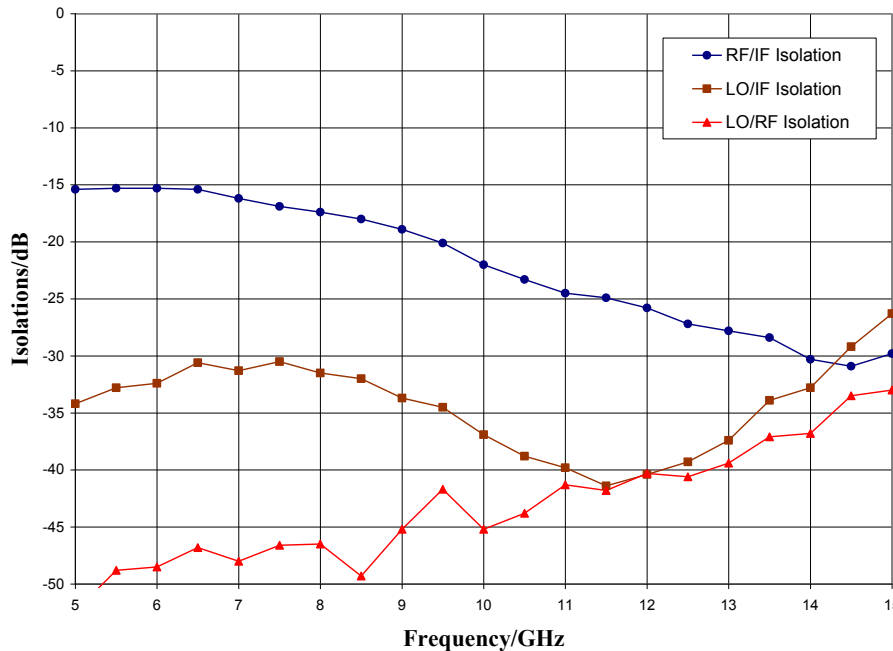


ver 1.1 0717

Typical Performance

Conversion Gain vs. LO Drive, IF = 100 MHz USB

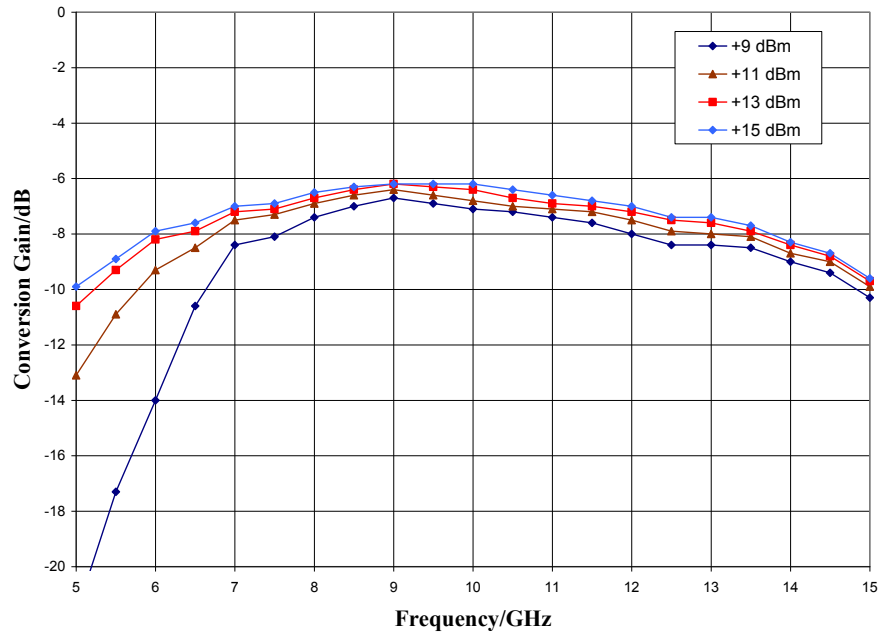


Return Loss, LO = + 13 dBm

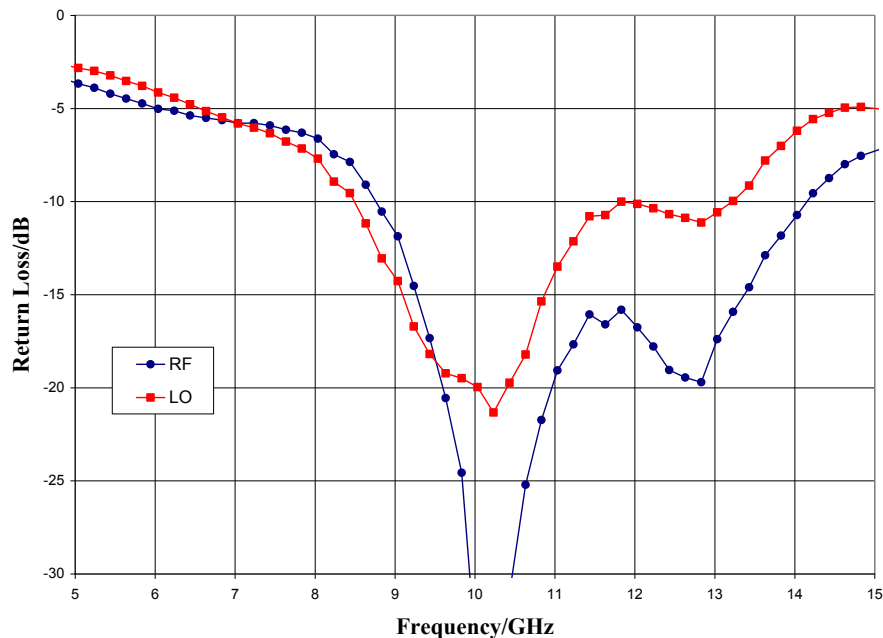


ver 1.1 0717

Typical Performance

IF Bandwidth, LO = +13 dBm

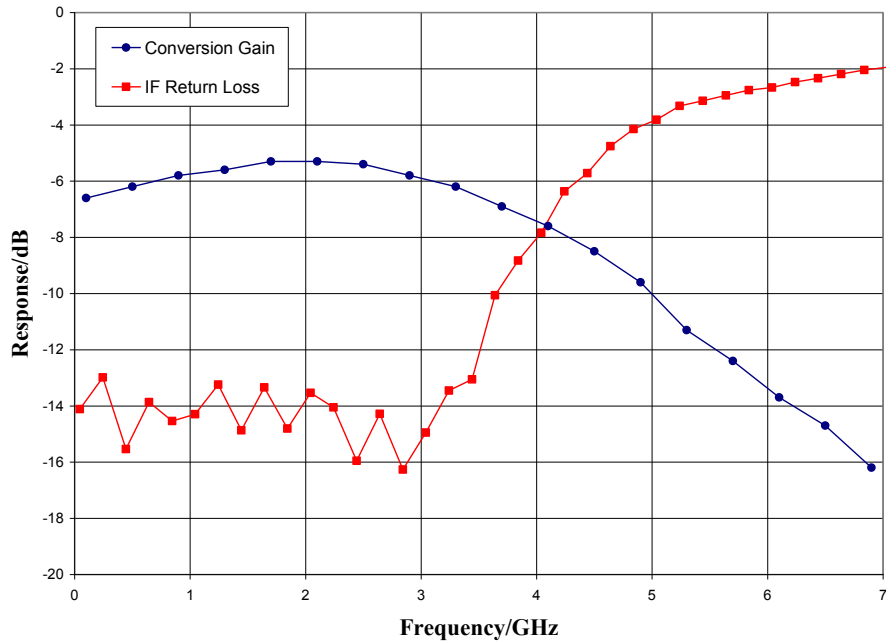


Upconverter Performance, Conversion Gain vs. LO Drive, IF input = 100 MHz

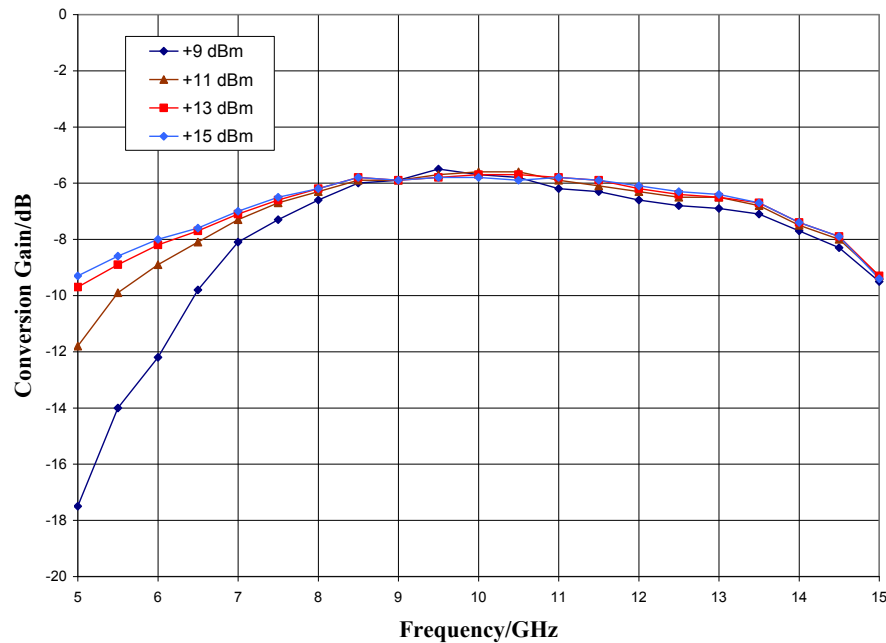


ver 1.1 0717

Typical Performance

Input IP3 vs. Temperature, LO = +15 dBm, IF = 100 MHz

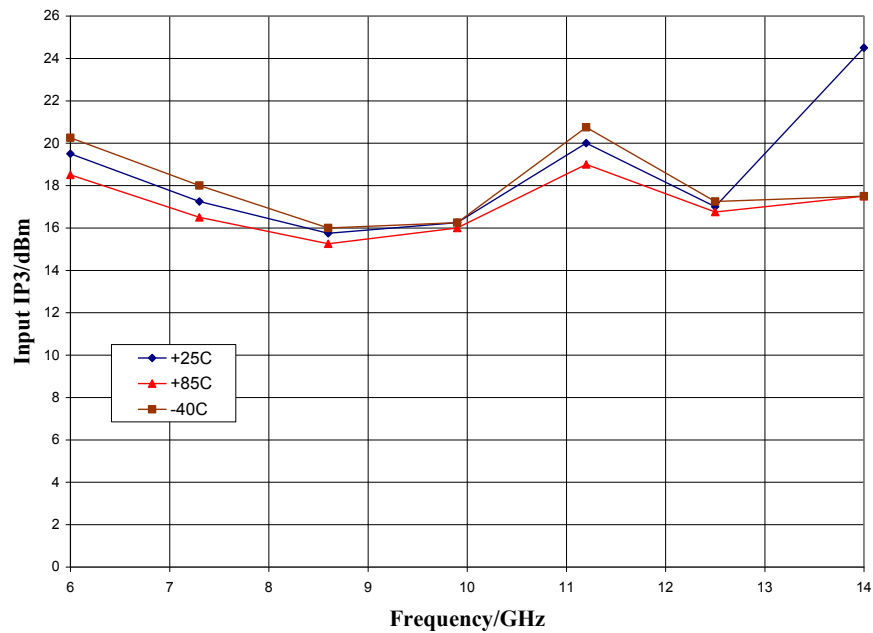


Input IP3 vs. LO Drive, IF = 100 MHz

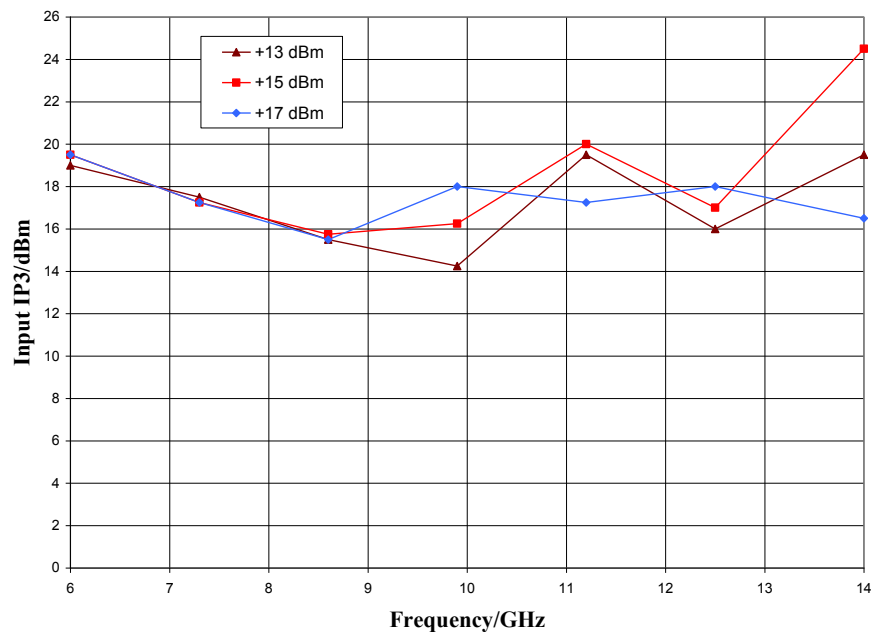


ver 1.1 0717

Typical Performance

Upconverter Performance, Input IP3 vs. LO Drive, IF = 100 MHz

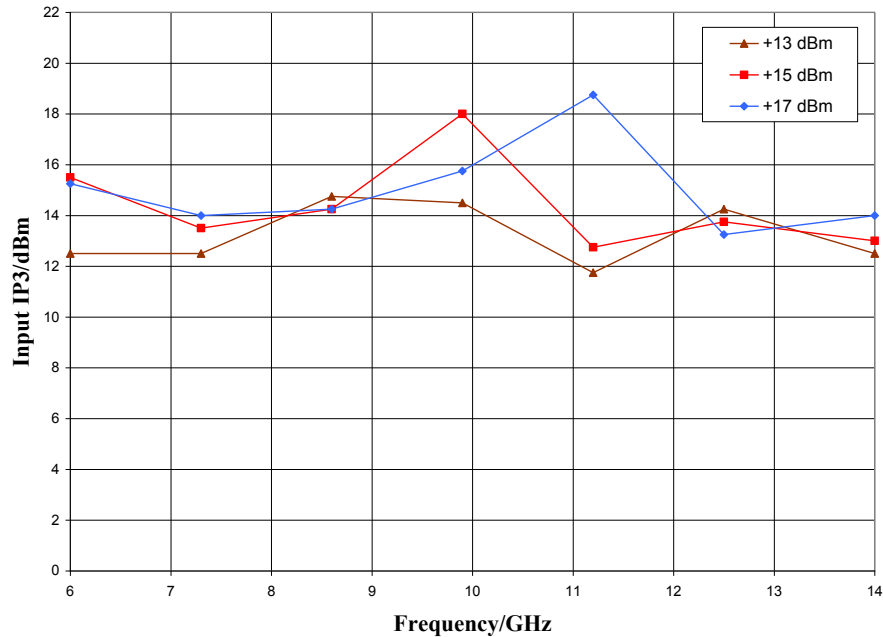

Input P1dB vs. Temperature, LO = +13 dBm, IF = 100 MHz USB

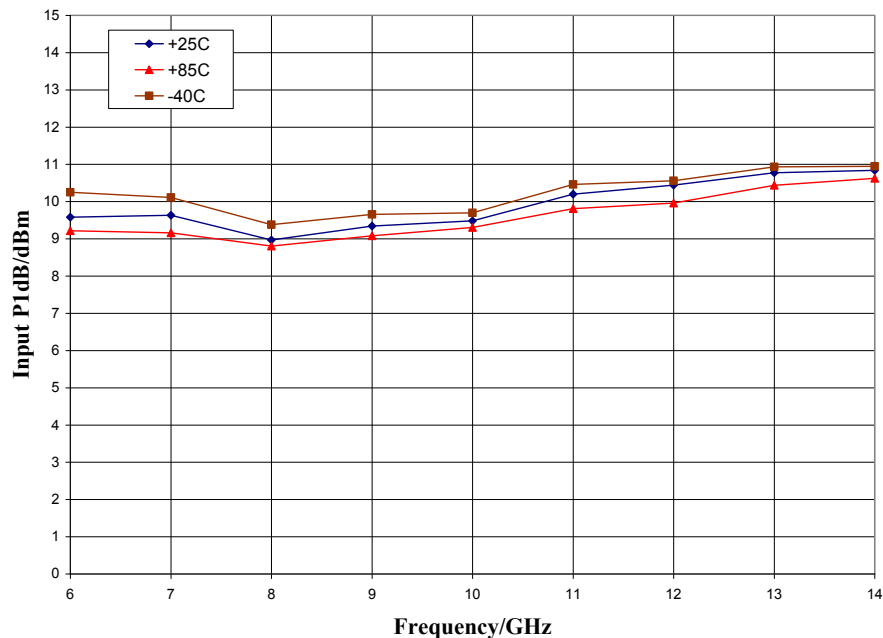

ver 1.1 0717

Typical Performance


MxN Spurious Outputs

mRF	nLO				
	0	1	2	3	4
0	xx	6.5	33.5	30.5	29.5
1	17.5	0	37.5	38.5	57.5
2	>75	69.5	66.5	66.5	> 75
3	> 75	> 75	> 75	62.5	> 75
4	> 75	> 75	> 75	> 75	> 75

RF = 10.1 GHz @ -10 dBm
 LO = 10.0 GHz @ +13 dBm
 All values in dBc below the IF output power level (1RF - 1LO)

Mechanical Information

Die Outline (all dimensions in microns)

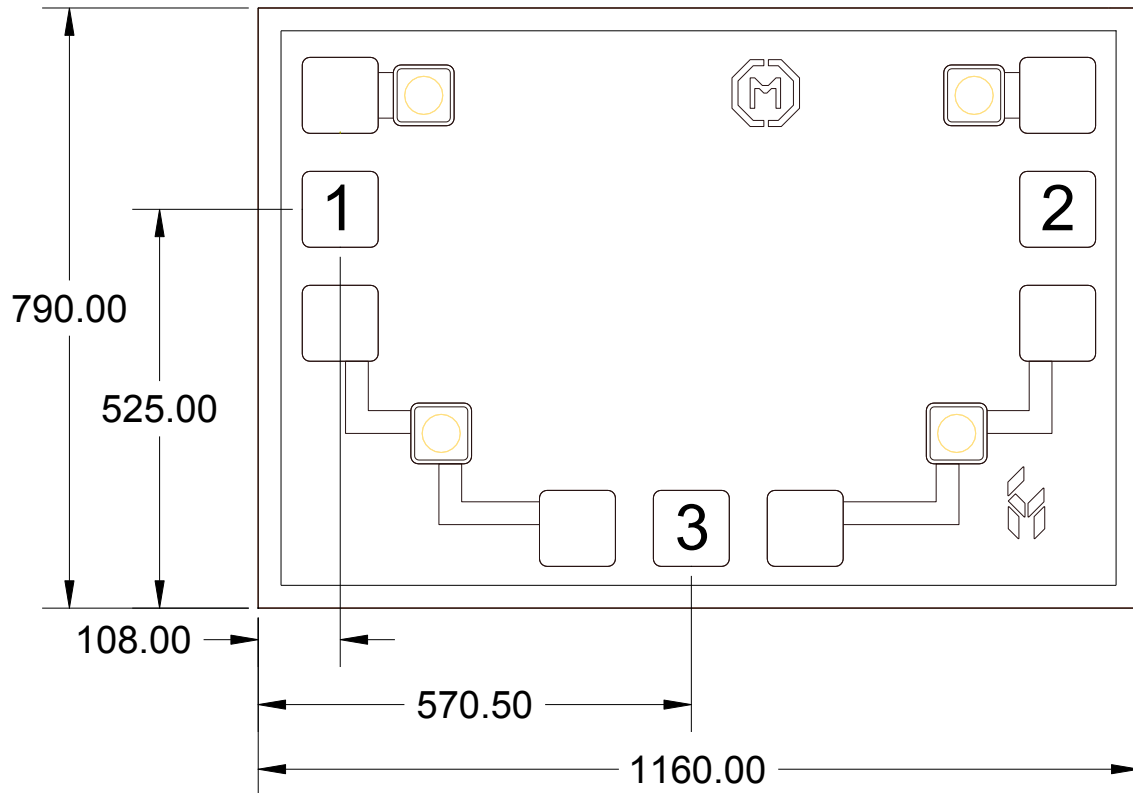


Notes:





1. No connection required for unlabeled pads
2. Backside is RF and DC ground
3. Backside and bond pad metal: Gold
4. Die is 100 microns thick
5. All bond pads are 100 x 100 microns square

Pin Description

Pad Diagram

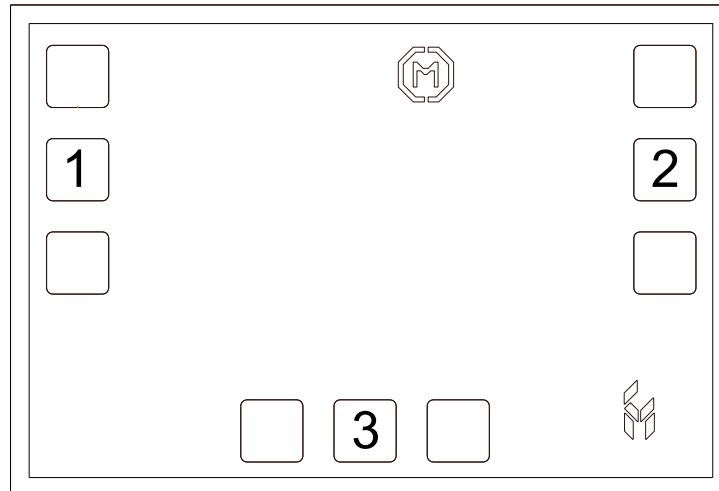

Functional Description

Pin	Function	Description	Schematic
1	LO	This pin is DC coupled and matched to 50 ohms.	
2	RF	This pin is DC coupled and matched to 50 ohms.	
3	IF	This pin is DC coupled. For applications not requiring operation to DC, this port should be DC blocked externally using a series capacitor whose value has been chosen to pass the necessary IF frequency range. For operation to DC, this pin must not source or sink more than 16 mA of current or part non-function or part failure may result.	
Backside	Ground	Connect to RF / DC ground.	

ver 1.1 0717