

MODEL: CMS-402813-24SP | **DESCRIPTION:** SPEAKER**FEATURES**

- 4 ohm
- rated 2.0 W
- solder tabs

**SPECIFICATIONS**


parameter	conditions/description	min	typ	max	units
input power			2	4	W
impedance		3.4	4	4.6	Ω
resonant frequency (Fo)		400	500	600	Hz
frequency response		Fo		2,000	Hz
sound pressure level	at 1.0 W, 50 cm, avg at 0.8, 1.0, 1.2, 1.5 kHz	82	85	88	dB
distortion	at 1.0 kHz, 1.0 W, 50 cm on baffle			5	%
buzz, rattle, etc.	must be normal at sine wave			2.83	V
polarity	cone moves forward w/ positive dc current to "+" terminal				
dimensions	40 x 28.4 x 13.3				mm
magnet	Nd-Fe-B				
frame material	ABS + 15% GF				
cone material	cloth + paper				
terminal	solder terminals				
weight			17		g
operating temperature		-20		55	$^{\circ}\text{C}$
storage temperature		-25		60	$^{\circ}\text{C}$
hand soldering	for maximum 2 seconds	360		380	$^{\circ}\text{C}$
RoHS	yes				

Notes: 1. All specifications measured at 15-35 $^{\circ}\text{C}$, humidity at 25-75%, unless otherwise noted.

MECHANICAL DRAWING

units: mm
tolerance: ± 0.2 mm


MOUNTING NOTICE

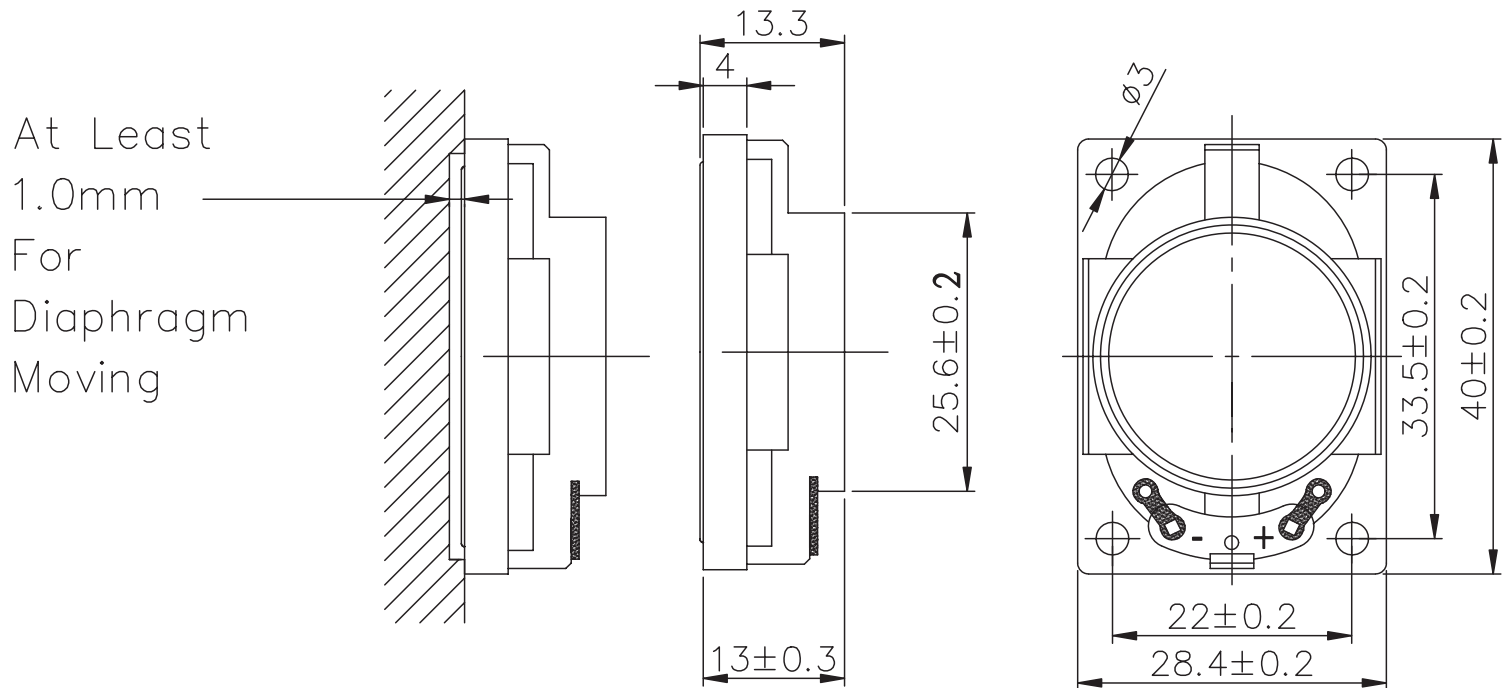

RESPONSE CURVES

Frequency Response Curve

Test Conditions: 1.0 W / 50 cm (on baffle)

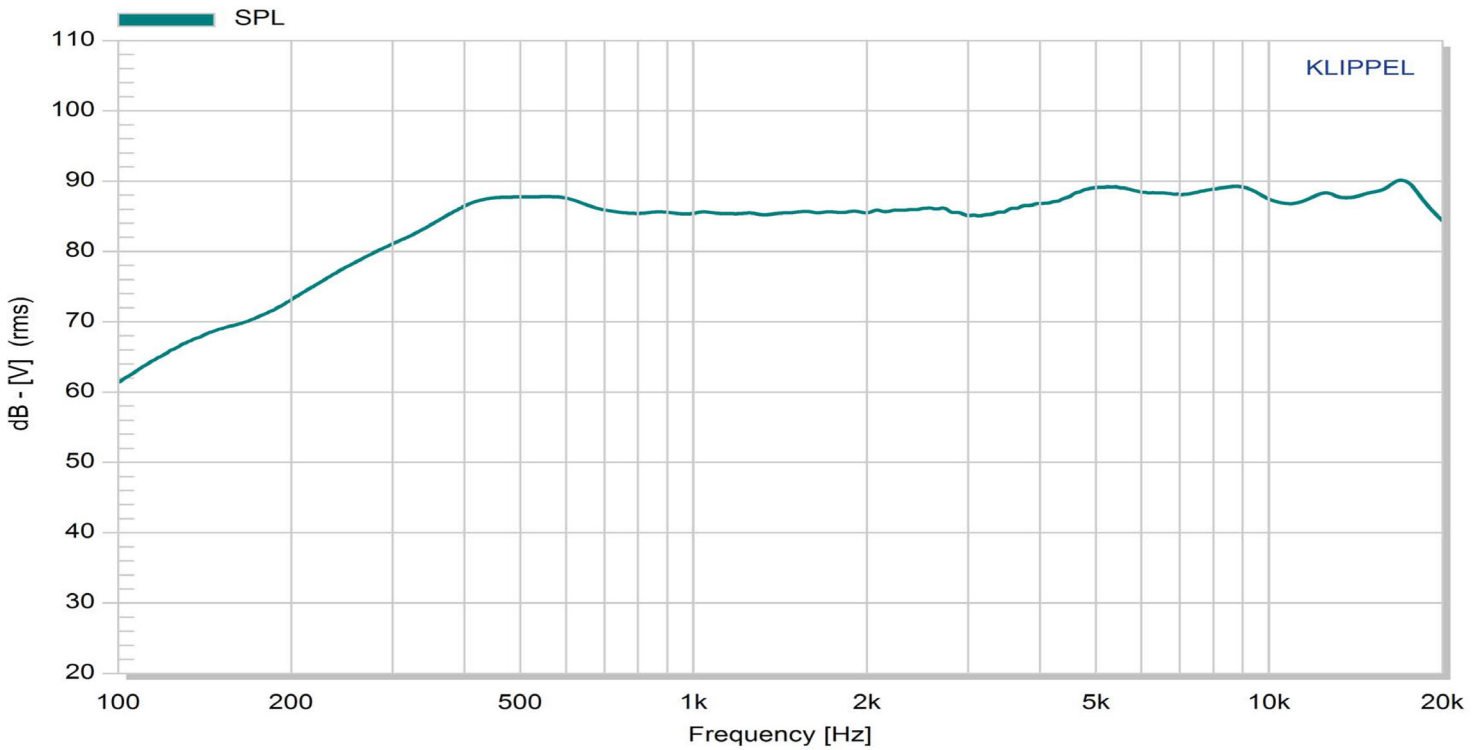

Total Harmonic Distortion Curve

Test Conditions: 1.0 W / 50 cm (on baffle)

