

**MODEL:** CMS0401KL-3X | **DESCRIPTION:** SPEAKER**FEATURES**

- 40.1 x 40.1 mm
- square frame
- 5.0 W
- 8  $\Omega$
- neodymium magnet
- mylar cone


**SPECIFICATIONS**

parameter	conditions/description	min	typ	max	units
input power			5.0	8.0	W
impedance	at 1.0 kHz, 1.0 V	6.8	8	9.2	$\Omega$
resonant frequency (Fo)	at 1.0 V	344	430	516	Hz
frequency response		Fo		20,000	Hz
sound pressure level	at 1.0 W, 50 cm, avg at 0.6, 0.8, 1.0, 1.2 kHz	84	87	90	dB
buzz, rattle, etc.	must be normal at sine wave			6.32	V
dimensions	40.1 x 40.1 x 14.5				mm
magnet	Nd-Fe-B				
cone material	mylar				
terminal	solder eyelets				
weight			42.5		g
operating temperature		-25		60	$^{\circ}\text{C}$
hand soldering	for maximum 3 seconds	340	350	360	$^{\circ}\text{C}$
RoHS	yes				

Notes: 1. All specifications measured at 15~35 $^{\circ}\text{C}$ , humidity at 25~75%, under 86~106 kPa pressure, unless otherwise noted.

## MECHANICAL DRAWING

units: mm

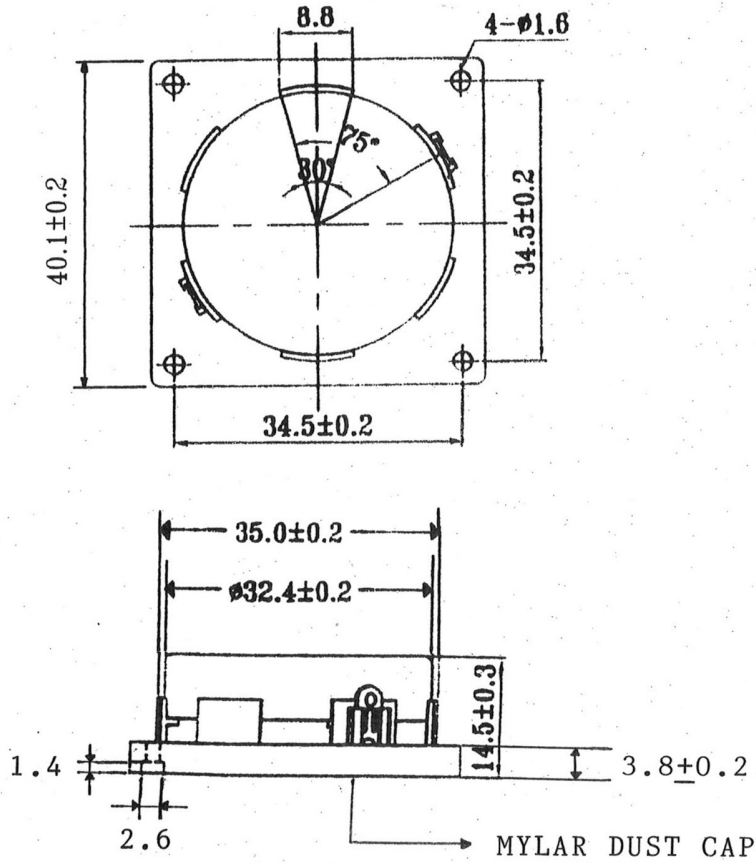

## FREQUENCY RESPONSE CURVE

parameter	conditions/description
potentiometer range	50 dB
rectifier	RMS
lower limit frequency	20 Hz
wr. speed	100 mm/sec
zero level	60 dB

