


SPECIFICATIONS:

Insulation Resistance: 1GΩ min. at 300V DC
 Withstanding Voltage: 300Vrms for 1min
 Voltage Rating: 31.5V AC
 Current Rating: 0.8A
 Contact Resistance: 10mΩ max. at 20mV max.
 Operating Temp.: - 55°C ~ +85°C
 Mating Cycle: 200 times

PART NUMBER:

CN121S-056-1001




MATERIALS AND FINISH:

- Top Contacts: Cu Alloy
- Bottom Contacts: Cu Alloy
- Insulator: LCP


CFP4 MSA COMPLIANT

FEATURES:


- CFP4 MSA Design Guideline Compliant
- Supports CFP4 64G-ACO channel and 112G-PAM4 channel
- RoHS and REACH Compliant

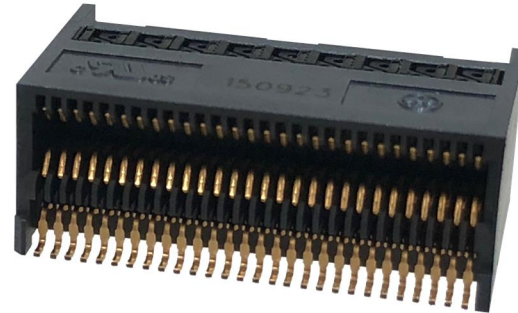


OUTLINE DIMENSIONS (mm):

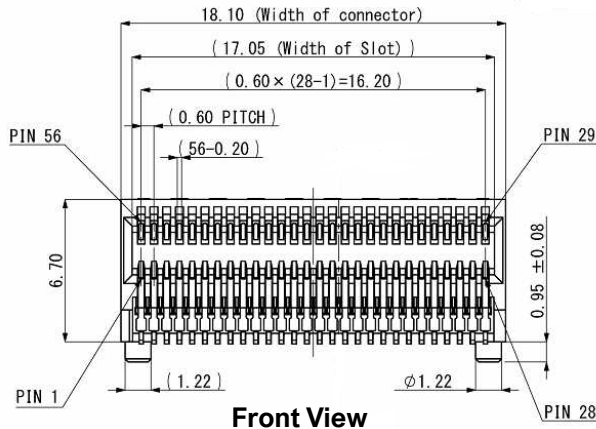


Front View

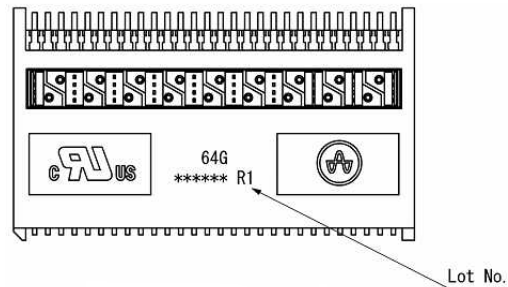

Top View

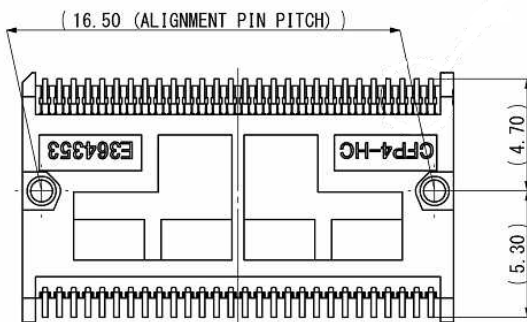

Bottom View

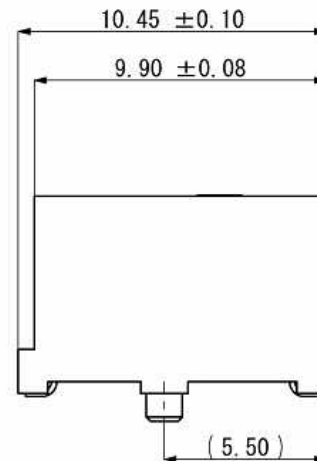

Side View